



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECSspeed2017\_int\_base = 7.66**

**SPECSspeed2017\_int\_peak = 7.84**

CPU2017 License: 9016


**Test Date:** Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2018

Tested by: ASUSTeK Computer Inc.

**Software Availability:** Jun-2018

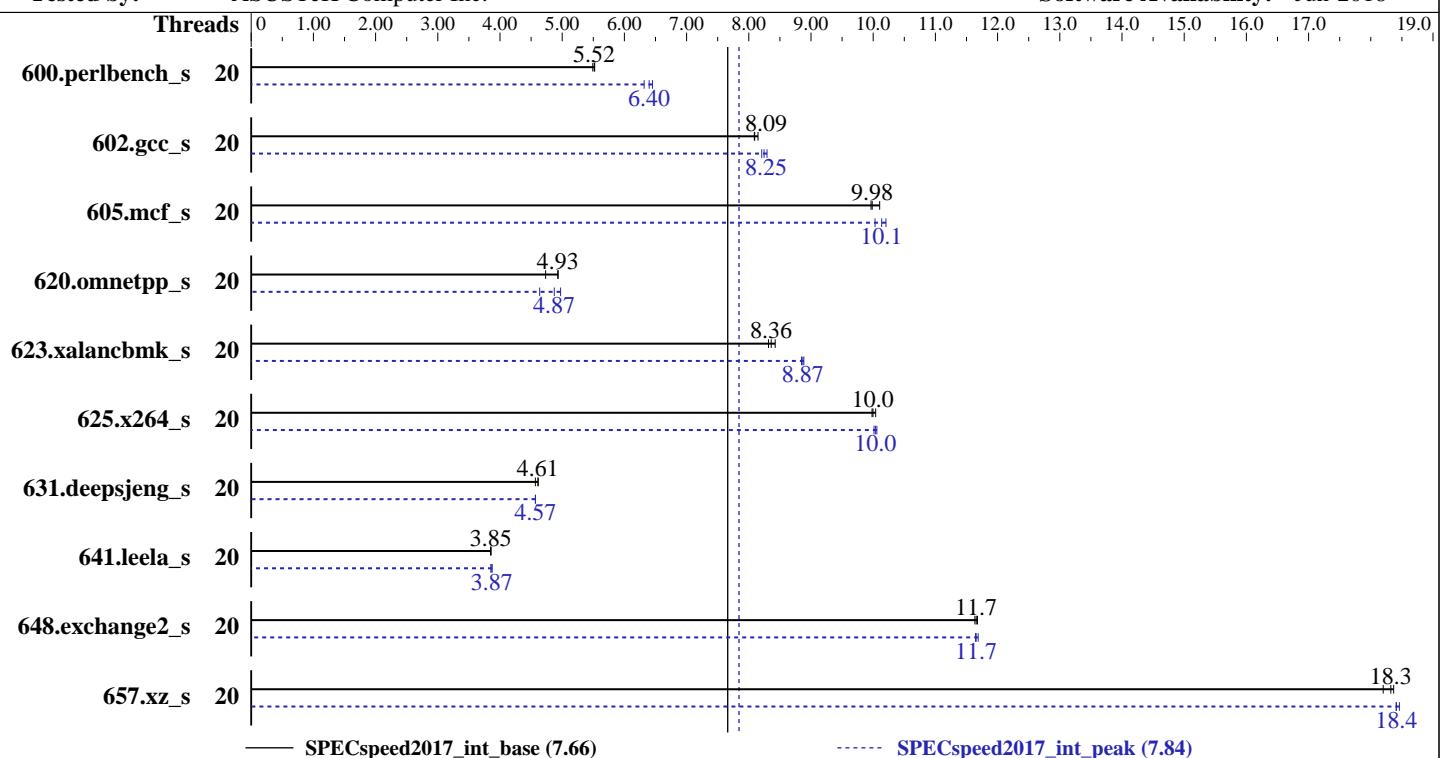

Hardware		Software	
CPU Name:	Intel Xeon Gold 5115	OS:	SUSE Linux Enterprise Server 12 (x86_64) SP3
Max MHz.:	3200		Kernel 4.4.120-94.17-default
Nominal:	2400	Compiler:	C/C++: Version 18.0.3.222 of Intel C/C++ Compiler for Linux;
Enabled:	20 cores, 2 chips		Fortran: Version 18.0.3.222 of Intel Fortran Compiler for Linux
Orderable:	1, 2 chip(s)	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 0905 released Mar-2018
L2:	1 MB I+D on chip per core	File System:	btrfs
L3:	13.75 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)	Peak Pointers:	32/64-bit
Storage:	1 x 240 GB SATA SSD	Other:	jemalloc: jemalloc memory allocator library V5.0.1
Other:	None		



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	20	323	5.49	321	5.52	<b>322</b>	<b>5.52</b>	20	281	6.32	275	6.45	<b>277</b>	<b>6.40</b>		
602.gcc_s	20	<b>492</b>	<b>8.09</b>	492	8.09	489	8.15	20	480	8.29	485	8.21	<b>483</b>	<b>8.25</b>		
605.mcf_s	20	<b>473</b>	<b>9.98</b>	474	9.96	467	10.1	20	463	10.2	471	10.0	<b>466</b>	<b>10.1</b>		
620.omnetpp_s	20	<b>331</b>	<b>4.93</b>	345	4.73	330	4.94	20	<b>335</b>	<b>4.87</b>	328	4.97	352	4.64		
623.xalancbmk_s	20	<b>169</b>	<b>8.36</b>	170	8.32	168	8.42	20	<b>160</b>	<b>8.87</b>	159	8.89	160	8.85		
625.x264_s	20	177	9.98	176	10.0	<b>176</b>	<b>10.0</b>	20	175	10.1	176	10.0	<b>176</b>	<b>10.0</b>		
631.deepsjeng_s	20	<b>311</b>	<b>4.61</b>	311	4.61	314	4.57	20	<b>314</b>	<b>4.57</b>	313	4.57	314	4.57		
641.leela_s	20	443	3.85	443	3.85	<b>443</b>	<b>3.85</b>	20	441	3.87	<b>441</b>	<b>3.87</b>	443	3.85		
648.exchange2_s	20	252	11.7	<b>252</b>	<b>11.7</b>	253	11.6	20	252	11.7	252	11.6	<b>252</b>	<b>11.7</b>		
657.xz_s	20	<b>337</b>	<b>18.3</b>	337	18.4	340	18.2	20	336	18.4	<b>336</b>	<b>18.4</b>	335	18.5		

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

**CPU2017 License:** 9016

**Test Date:** Aug-2018

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2018

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jun-2018

## Platform Notes

BIOS Configuration:

SNC = Disabled

IMC interleaving = AUTO

Patrol Scrub = Disabled

VT-d = Disabled

HyperThreading = Disabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Sat Aug 25 19:01:35 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz
  2 "physical id"s (chips)
  20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 10
  siblings   : 10
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                20
On-line CPU(s) list:  0-19
Thread(s) per core:   1
Core(s) per socket:   10
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz
Stepping:               4
CPU MHz:               2401.000
CPU max MHz:           2401.0000
CPU min MHz:           1000.0000
BogoMIPS:              4896.21
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017\_int\_base = 7.66

SPECspeed2017\_int\_peak = 7.84

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Platform Notes (Continued)

L2 cache: 1024K  
L3 cache: 14080K  
NUMA node0 CPU(s): 0-9  
NUMA node1 CPU(s): 10-19  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm intel\_pt rsb\_ctxtsw spec\_ctrl stibp retpoline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc pku ospke

/proc/cpuinfo cache data  
cache size : 14080 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9  
node 0 size: 192067 MB  
node 0 free: 191001 MB  
node 1 cpus: 10 11 12 13 14 15 16 17 18 19  
node 1 size: 193517 MB  
node 1 free: 190781 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo

MemTotal: 394839504 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:  
SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 3  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
os-release:  
NAME="SLES"  
VERSION="12-SP3"

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Platform Notes (Continued)

```
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Aug 24 16:24

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	203G	104G	99G	52%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0905 03/19/2018

Memory:

12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
peak) 657.xz_s(base)
-----
```

```
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
-----
```

```
icc (ICC) 18.0.3 20180410
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)

icpc (ICC) 18.0.3 20180410

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)

icpc (ICC) 18.0.3 20180410

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 648.exchange2\_s(base, peak)

ifort (IFORT) 18.0.3 20180410

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Base Portability Flags (Continued)

623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX

625.x264\_s: -DSPEC\_LP64

631.deepsjeng\_s: -DSPEC\_LP64

641.leela\_s: -DSPEC\_LP64

648.exchange2\_s: -DSPEC\_LP64

657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

623.xalancbmk\_s: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

CPU2017 License: 9016

Test Date: Aug-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2018

## Peak Portability Flags (Continued)

602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System  
(2.40 GHz, Intel Xeon Gold 5115)

**SPECspeed2017\_int\_base = 7.66**

**SPECspeed2017\_int\_peak = 7.84**

**CPU2017 License:** 9016

**Test Date:** Aug-2018

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2018

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jun-2018

## Peak Optimization Flags (Continued)

623.xalancbmk\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-08-25 07:01:34-0400.

Report generated on 2018-10-31 19:14:11 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-02.