



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

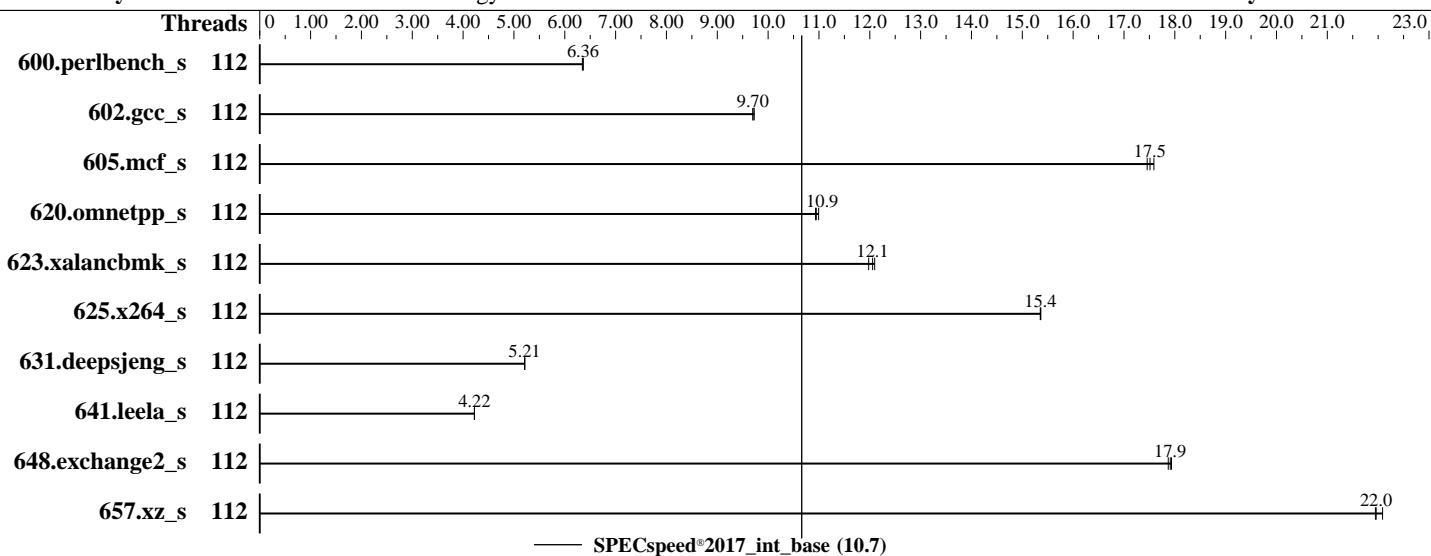

### Hardware

CPU Name: Intel Xeon Gold 6330  
Max MHz: 3100  
Nominal: 2000  
Enabled: 56 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 42 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### OS:

Red Hat Enterprise Linux 8.3  
(Ootpa)

### Compiler:

Kernel 4.18.0-240.el8.x86\_64  
C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler  
Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler  
Classic Build 20201112 for Linux

### Parallel:

Yes

### Firmware:

Lenovo BIOS Version U8E109PT1 1.01  
released Apr-2021

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

Not Applicable

### Other:

jemalloc memory allocator V5.0.1

### Power Management:

BIOS and OS set to prefer performance  
at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	279	6.36	280	6.35	<b>279</b>	<b>6.36</b>							
602.gcc_s	112	411	9.70	<b>410</b>	<b>9.70</b>	409	9.73							
605.mcf_s	112	<b>270</b>	<b>17.5</b>	268	17.6	270	17.5							
620.omnetpp_s	112	148	11.0	<b>149</b>	<b>10.9</b>	149	10.9							
623.xalancbmk_s	112	118	12.0	<b>118</b>	<b>12.1</b>	117	12.1							
625.x264_s	112	<b>115</b>	<b>15.4</b>	115	15.4	115	15.4							
631.deepsjeng_s	112	275	5.21	<b>275</b>	<b>5.21</b>	275	5.21							
641.leela_s	112	404	4.22	<b>404</b>	<b>4.22</b>	404	4.22							
648.exchange2_s	112	<b>164</b>	<b>17.9</b>	165	17.9	164	17.9							
657.xz_s	112	280	22.1	<b>281</b>	<b>22.0</b>	282	21.9							

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

```
    "/home/cpu2017-1.1.5-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.5-ic202
    1.1-revB/je5.0.1-64"
```

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

### General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from [jemalloc.net](https://github.com/jemalloc/jemalloc/releases) or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
MONITOR/MWAIT set to Enabled

CPU P-state Control set to Cooperative with Legacy

C-States set to Legacy

UPI Link Disable set to Disabled 1 Link

UPI Prefetcher set to Disabled

```
Sysinfo program /home/cpu2017-1.1.5-ic2021.1-revB/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Fri May 14 16:00:21 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
  2 "physical id"s (chips)
  112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 56
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               112
On-line CPU(s) list: 0-111
Thread(s) per core:  2
Core(s) per socket:  28
Socket(s):            2
NUMA node(s):         2
Vendor ID:            GenuineIntel
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

## Platform Notes (Continued)

CPU family: 6  
Model: 106  
Model name: Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz  
Stepping: 6  
CPU MHz: 2673.467  
CPU max MHz: 3100.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4000.00  
Virtualization: VT-x  
L1d cache: 48K  
L1i cache: 32K  
L2 cache: 1280K  
L3 cache: 43008K  
NUMA node0 CPU(s): 0-27,56-83  
NUMA node1 CPU(s): 28-55,84-111  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsavecto xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occu\_llc cqmq\_mbm\_total cqmq\_mbm\_local split\_lock\_detect wbnoinvd dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpocntdq la57 rdpid md\_clear pconfig flush\_lid arch\_capabilities

/proc/cpuinfo cache data  
cache size : 43008 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27  
56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83  
node 0 size: 242739 MB  
node 0 free: 256885 MB  
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106  
107 108 109 110 111  
node 1 size: 244999 MB  
node 1 free: 257292 MB  
node distances:  
node 0 1

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

## Platform Notes (Continued)

```
0: 10 20
1: 20 10
```

```
From /proc/meminfo
MemTotal:      527864556 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/sbin/tuned-adm active
    Current active profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux"
    VERSION="8.3 (Ootpa)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="8.3"
    PLATFORM_ID="platform:el8"
    PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
    ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

## Platform Notes (Continued)

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 May 14 15:58

SPEC is set to: /home/cpu2017-1.1.5-ic2021.1-revB

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	818G	15G	803G	2%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SN550 V2
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor:	Lenovo
BIOS Version:	U8E109PT1-1.01
BIOS Date:	04/28/2021
BIOS Revision:	1.1
Firmware Revision:	1.40

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
	625.x264_s(base) 657.xz_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++	620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
	641.leela_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-DSPEC\_OPENMP -std=c11 -m64 -fopenmp -Wl,-z,muldefs -xCORE-AVX2  
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550 V2  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 10.7

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-D.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-D.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-05-14 04:00:21-0400.

Report generated on 2021-06-08 20:02:13 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.