



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Mar-2022

Hardware Availability: Apr-2021

Software Availability: Jun-2021

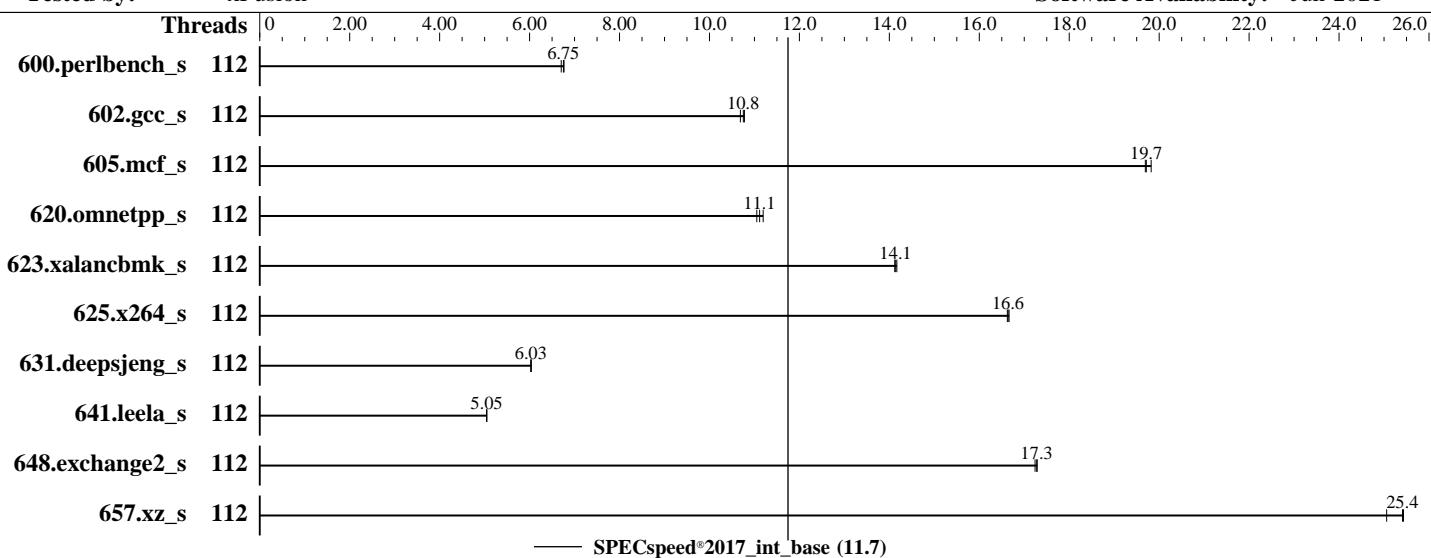

Hardware

CPU Name: Intel Xeon Platinum 8276L
Max MHz: 4000
Nominal: 2200
Enabled: 112 cores, 4 chips
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86_64
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
Parallel: Yes
Firmware: Version 8.23 Released Dec-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	265	6.70	263	6.75	262	6.77							
602.gcc_s	112	369	10.8	370	10.8	373	10.7							
605.mcf_s	112	239	19.7	240	19.7	238	19.8							
620.omnetpp_s	112	147	11.1	148	11.1	146	11.2							
623.xalancbmk_s	112	100	14.1	100	14.1	100	14.2							
625.x264_s	112	106	16.6	106	16.6	106	16.7							
631.deepsjeng_s	112	238	6.03	237	6.04	238	6.03							
641.leela_s	112	338	5.05	338	5.05	338	5.05							
648.exchange2_s	112	170	17.3	171	17.2	170	17.3							
657.xz_s	112	243	25.4	247	25.1	243	25.4							

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 5885H V5 (Intel Xeon Platinum 8276L)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Jun-2021

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

running on localhost.localdomain Fri Mar 11 04:05:48 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
  4 "physical id"s (chips)
  112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
  physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
  physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               112
On-line CPU(s) list: 0-111
Thread(s) per core:  1
Core(s) per socket:  28
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
CPU family:           6
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 5885H V5 (Intel Xeon Platinum 8276L)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Jun-2021

Platform Notes (Continued)

Model: 85
Model name: Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
BIOS Model name: Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
Stepping: 7
CPU MHz: 3326.664
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbmbm_total cqmq_mbmbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 39424 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 191669 MB
node 0 free: 185044 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55
node 1 size: 193529 MB
node 1 free: 193110 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
node 2 size: 193529 MB
node 2 free: 191835 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 5885H V5 (Intel Xeon Platinum 8276L)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Jun-2021

Platform Notes (Continued)

```
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 193529 MB
node 3 free: 193146 MB
node distances:
node   0   1   2   3
  0: 10 21 21 21
  1: 21 10 21 21
  2: 21 21 10 21
  3: 21 21 21 10

From /proc/meminfo
MemTotal:      790792876 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
  performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.4 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.4"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):
CVE-2018-3620 (L1 Terminal Fault):
Microarchitectural Data Sampling:
CVE-2017-5754 (Meltdown):
CVE-2018-3639 (Speculative Store Bypass):

KVM: Mitigation: Split huge pages
Not affected
Not affected
Not affected
Mitigation: Speculative Store

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 11.7

xFusion 5885H V5 (Intel Xeon Platinum 8276L)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Jun-2021

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Bypass disabled via prctl and seccomp

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Mitigation: TSX disabled

run-level 3 Mar 11 03:51

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	859G	132G	728G	16%	/

From /sys/devices/virtual/dmi/id

Vendor:	xFusion
Product:	5885H V5
Product Family:	Purley
Serial:	1234567

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

BIOS:

BIOS Vendor:	INSYDE Corp.
BIOS Version:	8.23
BIOS Date:	12/30/2021
BIOS Revision:	8.23

(End of data from sysinfo program)

Compiler Version Notes

=====

C	600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
	625.x264_s(base) 657.xz_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 5885H V5 (Intel Xeon Platinum 8276L)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Mar-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: Jun-2021

Compiler Version Notes (Continued)

```
=====
C++      | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 648.exchange2_s(base)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 5885H V5 (Intel Xeon Platinum 8276L)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Mar-2022

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-03-11 04:05:47-0500.

Report generated on 2022-05-25 13:13:41 by CPU2017 PDF formatter v6442.

Originally published on 2022-05-24.