



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

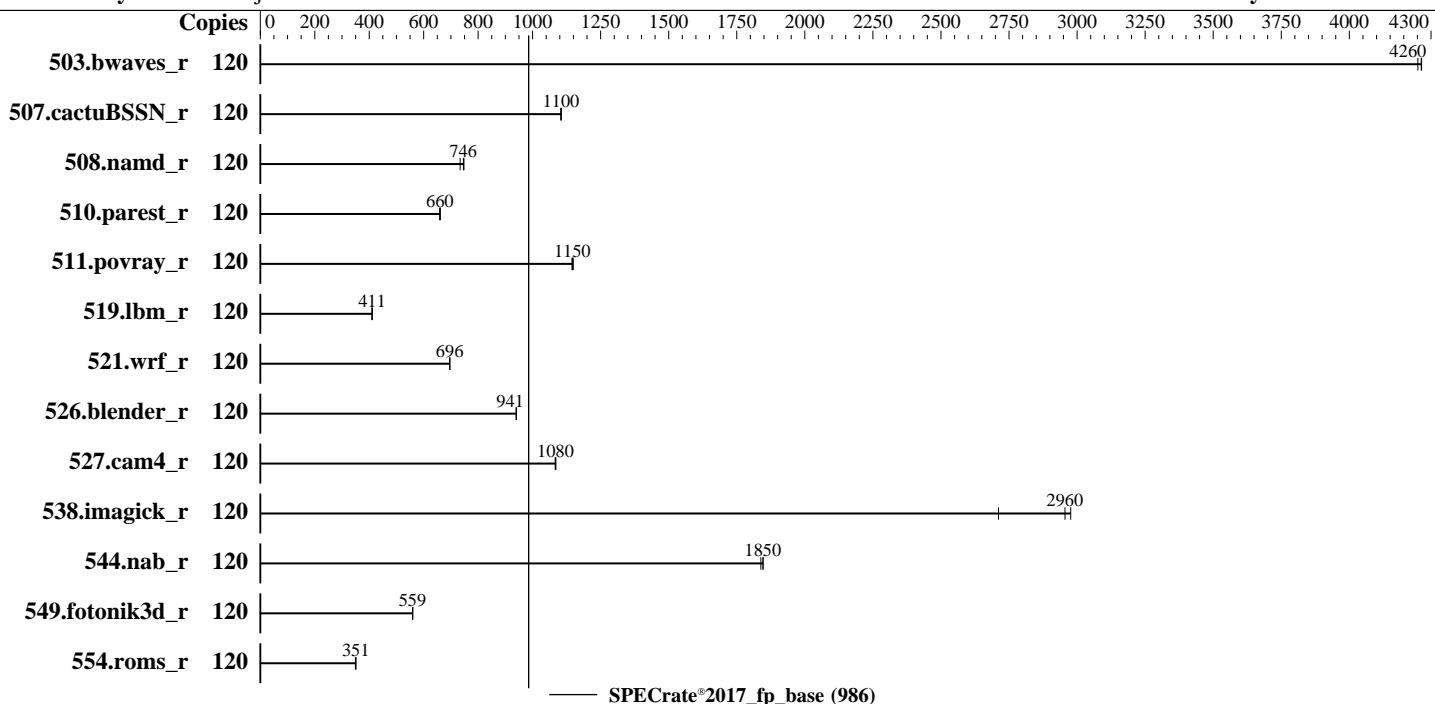

Hardware

CPU Name: Intel Xeon Platinum 8490H
Max MHz: 3500
Nominal: 1900
Enabled: 120 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 112.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 1 TB SATA HDD, 7200 RPM
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3988-A1x. Released May-2023 tested as V1.0.0.0 R0.27.1 for D3988-A1x Dec-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	120	282	4260	282	4270	283	4250							
507.cactusBSSN_r	120	137	1110	137	1100	138	1100							
508.namd_r	120	152	748	153	746	155	734							
510.parest_r	120	476	660	476	659	475	661							
511.povray_r	120	244	1150	245	1140	244	1150							
519.lbm_r	120	308	411	308	411	308	411							
521.wrf_r	120	386	696	387	695	386	696							
526.blender_r	120	195	939	194	941	194	941							
527.cam4_r	120	193	1090	193	1080	194	1080							
538.imagick_r	120	101	2960	110	2710	100	2980							
544.nab_r	120	109	1850	110	1840	109	1850							
549.fotonik3d_r	120	837	559	836	559	835	560							
554.roms_r	120	543	351	546	349	544	351							

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
cpupower -c all frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Hyper Threading = Disabled

Package C State limit = C0

CPU Performance Boost = Aggressive

SNC (Sub NUMA) = Enable SNC4

```
Sysinfo program /home/Benchmark/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Mar 22 18:05:03 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

Platform Notes (Continued)

```
15. sysctl  
16. /sys/kernel/mm/transparent_hugepage  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS
```

```
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w  
18:05:03 up 1 min, 1 user, load average: 3.30, 1.63, 0.61  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 - 18:04 15.00s 1.49s 0.16s /home/Benchmark/ptu-unified/ptu -i 5000000  
-filter 0x3f -ts -csv -log -logdir . -logname ptu_fprate_SPR_2017_withptu_202303221804
```

```
3. Username  
From environment variable $USER: root
```

```
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4125337  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority       (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 4125337  
virtual memory           (kbytes, -v) unlimited  
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

Platform Notes (Continued)

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=120 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=60 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=120 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=60 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size reframe fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b0000c0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 60
siblings        : 60
2 physical ids (chips)
120 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.2:
```

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Address sizes: 46 bits physical, 57 bits virtual

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	120
On-line CPU(s) list:	0-119
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Platinum 8490H
CPU family:	6
Model:	143
Thread(s) per core:	1
Core(s) per socket:	60
Socket(s):	2
Stepping:	8
CPU max MHz:	3500.0000
CPU min MHz:	800.0000
BogoMIPS:	3800.00
Flags:	fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pkru ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_ll1d arch_capabilities
Virtualization:	VT-x
L1d cache:	5.6 MiB (120 instances)
L1i cache:	3.8 MiB (120 instances)
L2 cache:	240 MiB (120 instances)
L3 cache:	225 MiB (2 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-14
NUMA node1 CPU(s):	15-29
NUMA node2 CPU(s):	30-44
NUMA node3 CPU(s):	45-59
NUMA node4 CPU(s):	60-74
NUMA node5 CPU(s):	75-89
NUMA node6 CPU(s):	90-104
NUMA node7 CPU(s):	105-119
Vulnerability Itlb multihit:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-14

node 0 size: 128601 MB

node 0 free: 127150 MB

node 1 cpus: 15-29

node 1 size: 129020 MB

node 1 free: 128696 MB

node 2 cpus: 30-44

node 2 size: 128985 MB

node 2 free: 128737 MB

node 3 cpus: 45-59

node 3 size: 129020 MB

node 3 free: 128721 MB

node 4 cpus: 60-74

node 4 size: 129020 MB

node 4 free: 128777 MB

node 5 cpus: 75-89

node 5 size: 129020 MB

node 5 free: 128754 MB

node 6 cpus: 90-104

node 6 size: 129020 MB

node 6 free: 128733 MB

node 7 cpus: 105-119

node 7 size: 128670 MB

node 7 free: 128397 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	21	21	21	21

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

Platform Notes (Continued)

```
1: 12 10 12 12 21 21 21 21  
2: 12 12 10 12 21 21 21 21  
3: 12 12 12 10 21 21 21 21  
4: 21 21 21 21 10 12 12 12  
5: 21 21 21 21 12 10 12 12  
6: 21 21 21 21 12 12 10 12  
7: 21 21 21 21 12 12 12 10
```

9. /proc/meminfo

```
MemTotal: 1056110728 kB
```

10. who -r

```
run-level 3 Mar 22 18:04
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status  
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog libvirtd lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm_stat libstoragemgmt libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd virtnodeudev virtnwfiterd virtproxyd virtqemud virtsecretd virtstoraged indirect pcscd virtlockd virtlogd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=23234968-5b68-46e8-83be-a74bc7548b63  
splash=silent  
resume=/dev/disk/by-uuid/bcf0d2ab-8339-4550-95f8-8bd850a722be  
mitigations=auto
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
quiet
security=apparmor
crashkernel=321M,high
crashkernel=72M,low
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 3.50 GHz.  
                The governor "performance" may decide which speed to use  
                within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio       10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs      3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy       0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs 60000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information
SPEC is set to: /home/Benchmark/speccpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 262G 29G 233G 11% /home

20. /sys/devices/virtual/dmi/id
Vendor: FUJITSU
Product: PRIMERGY CX2550 M7
Product Family: SERVER
Serial: BBBB000001

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
14x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
2x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R0.27.0 for D3988-Alx
BIOS Date: 12/22/2022
BIOS Revision: 0.27
Firmware Revision: 2.0



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

Compiler Version Notes

=====

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base) 510.parest_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

```
=====
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8490H,
1.90GHz

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2023

Test Sponsor: Fujitsu

Hardware Availability: May-2023

Tested by: Fujitsu

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-22 05:05:02-0400.

Report generated on 2023-04-12 12:48:39 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.