



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9640 (Intel Xeon Platinum 8468)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

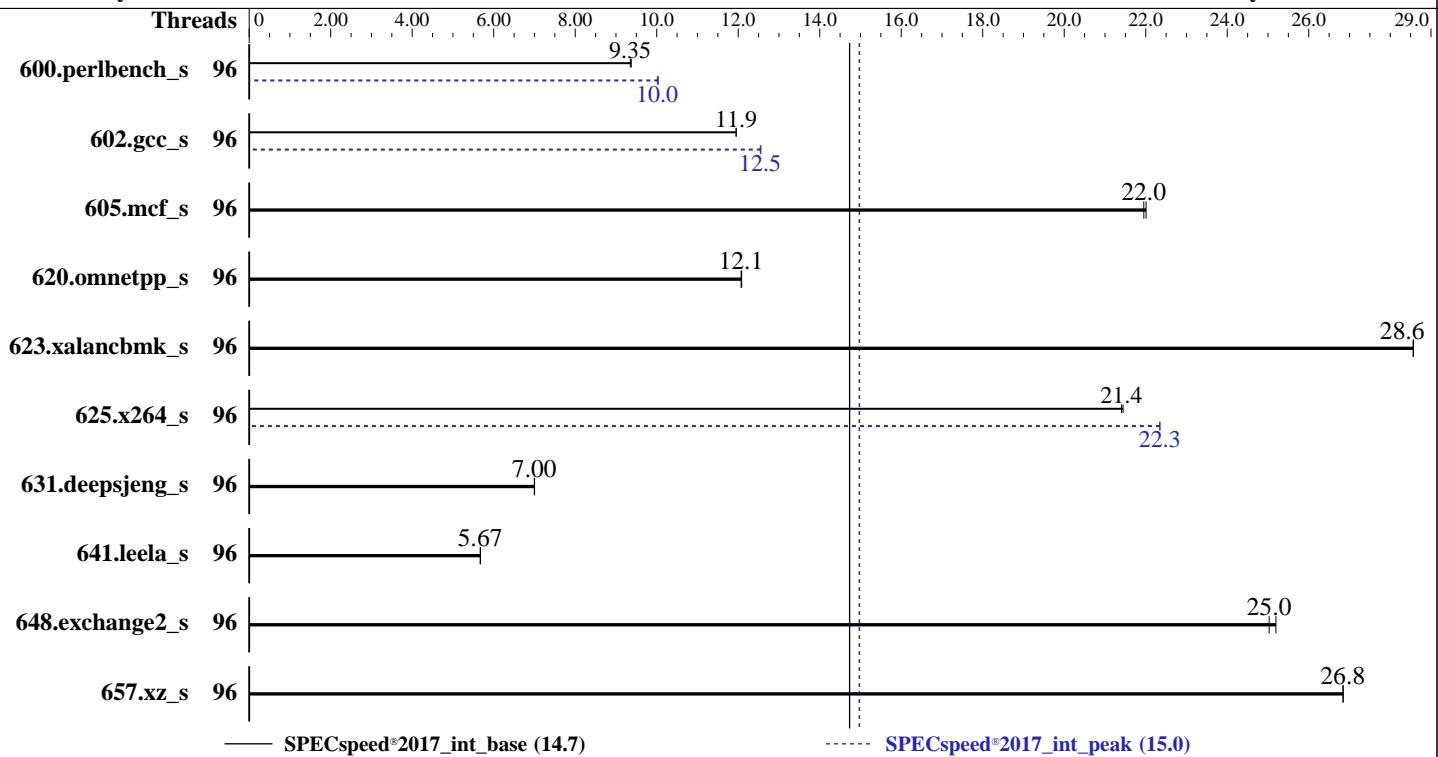

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8468	OS:	Red Hat Enterprise Linux 9.0 (Plow)
Max MHz:	3800	Compiler:	5.14.0-70.13.1.el9_0.x86_64 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Nominal:	2100		Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Enabled:	96 cores, 2 chips	Parallel:	Yes
Orderable:	1,2 chips	Firmware:	Version 0.4.32 released Apr-2023
Cache L1:	32 KB I + 48 KB D on chip per core	File System:	tmpfs
L2:	2 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	105 MB I+D on chip per chip	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)	Other:	jemalloc memory allocator V5.0.1
Storage:	70 GB on tmpfs	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	None		



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	<b>190</b>	<b>9.35</b>	189	9.38			96	<b>177</b>	<b>10.0</b>	177	10.0		
602.gcc_s	96	333	12.0	<b>333</b>	<b>11.9</b>			96	<b>317</b>	12.6	<b>318</b>	<b>12.5</b>		
605.mcf_s	96	215	22.0	<b>215</b>	<b>22.0</b>			96	<b>215</b>	22.0	<b>215</b>	<b>22.0</b>		
620.omnetpp_s	96	135	12.1	<b>135</b>	<b>12.1</b>			96	<b>135</b>	12.1	<b>135</b>	<b>12.1</b>		
623.xalancbmk_s	96	<b>49.6</b>	<b>28.6</b>	49.6	28.6			96	<b>49.6</b>	<b>28.6</b>	49.6	28.6		
625.x264_s	96	<b>82.4</b>	<b>21.4</b>	82.3	21.4			96	<b>78.9</b>	<b>22.3</b>	78.9	22.3		
631.deepsjeng_s	96	205	7.00	<b>205</b>	<b>7.00</b>			96	<b>205</b>	7.00	<b>205</b>	<b>7.00</b>		
641.leela_s	96	301	5.67	<b>301</b>	<b>5.67</b>			96	<b>301</b>	5.67	<b>301</b>	<b>5.67</b>		
648.exchange2_s	96	<b>117</b>	<b>25.0</b>	117	25.2			96	<b>117</b>	<b>25.0</b>	117	25.2		
657.xz_s	96	<b>230</b>	<b>26.8</b>	230	26.8			96	<b>230</b>	<b>26.8</b>	230	26.8		
SPECspeed®2017_int_base = 14.7														
SPECspeed®2017_int_peak = 15.0														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
        Logical Processor : Disabled
    Virtualization Technology : Disabled
        Sub NUMA Cluster : 2-way Clustering
        Optimizer Mode : Enabled
```

```
    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
        C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
        PCI ASPM L1 Link
        Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu May 4 11:06:27 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
-----
2. w
11:06:27 up 11 min, 1 user, load average: 29.58, 56.33, 31.66
USER      TTY      LOGIN@     IDLE     JCPU      PCPU WHAT
root      tty1     10:57   27.00s  0.93s  0.00s /bin/bash ./dell-run-speccpu.sh speed --define
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5 --define DL-LQC=1 --output_format html,pdf,txt
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4124014
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4124014
virtual memory            (kbytes, -v) unlimited
file locks                (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5 --define
DL-LQC=1 --output_format html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.5 --define DL-LQC=1 --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=96 --tune base,peak -o all --define
intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define
DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define
DL-VERS=v4.5 --define DL-LQC=1 --output_format html,pdf,txt intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=96 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc
--define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2
--define DL-VERS=v4.5 --define DL-LQC=1 --output_format html,pdf,txt --nopower --runmode speed --tune
base:peak --size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 6
microcode       : 0x2b000461
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 48
siblings        : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 96
On-line CPU(s) list:    0-95
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel
Model name:              Intel(R) Xeon(R) Platinum 8468
BIOS Model name:        Intel(R) Xeon(R) Platinum 8468
CPU family:              6
Model:                  143
Thread(s) per core:     1
Core(s) per socket:     48
Socket(s):              2
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```

Stepping: 6
BogoMIPS: 4200.00
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
nonstop_tsc cpuid aperfmpf tsc_known_freq pn1 pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xptr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cq_m rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mbm_total
cq_m_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfn1 vaes
vpclmulqdq avx512_vnni avx512_bitlg tme avx512_vpocntdq la57 rdpid
bus_lock_detect coldremote movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s):
NUMA node0 CPU(s): 0,4,8,12,16,18,22,26,28,30,34,38,42,46,50,56,62,64,68,72,76,80,88,92
NUMA node1 CPU(s): 2,6,10,14,20,24,32,36,40,44,48,52,54,58,60,66,70,74,78,82,84,86,90,94
NUMA node2 CPU(s): 1,5,9,15,19,23,27,33,35,39,43,47,51,55,59,61,67,71,75,79,83,87,89,93
NUMA node3 CPU(s): 3,7,11,13,17,21,25,29,31,37,41,45,49,53,57,63,65,69,73,77,81,85,91,95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K     4.5M   12 Data        1       64          1           64
  L1i     32K     3M     8 Instruction  1       64          1           64
  L2      2M     192M   16 Unified      2      2048          1           64
  L3     105M    210M   15 Unified      3     114688          1           64

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,18,22,26,28,30,34,38,42,46,50,56,62,64,68,72,76,80,88,92
node 0 size: 256983 MB
node 0 free: 256629 MB
node 1 cpus: 2,6,10,14,20,24,32,36,40,44,48,52,54,58,60,66,70,74,78,82,84,86,90,94
node 1 size: 258042 MB
node 1 free: 257488 MB
node 2 cpus: 1,5,9,15,19,23,27,33,35,39,43,47,51,55,59,61,67,71,75,79,83,87,89,93
node 2 size: 258042 MB
node 2 free: 248630 MB
node 3 cpus: 3,7,11,13,17,21,25,29,31,37,41,45,49,53,57,63,65,69,73,77,81,85,91,95
node 3 size: 257995 MB
node 3 free: 257723 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
node distances:
node  0   1   2   3
 0: 10  12  21  21
 1: 12  10  21  21
 2: 21  21  10  12
 3: 21  21  12  10

-----
9. /proc/meminfo
MemTotal:      1055809688 kB

-----
10. who -r
run-level 3 May 4 10:54

-----
11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target  Status
multi-user      running

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
                systemd-network-generator udisks2 upower vgaauthd vmtoolsd
enabled-runtime
disabled       systemd-remount-fs
                arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                dbus-daemon debug-shell dnsmasq iprdump iprinit iprupdate iscsid iscsiuiio kpatch kvm_stat
                ledmon man-db-restart-cache-update nftables nvmf-autoconnect podman podman-auto-update
                podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbuild
                serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
                systemd-pstore systemd-sysext wpa_supplicant
indirect        spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.e19_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space      2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes     0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                0  
vm.dirty_expire_centisecs    3000  
vm.dirty_ratio                20  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages               0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages   0  
vm.swappiness                 60  
vm.watermark_boost_factor    15000  
vm.watermark_scale_factor     10  
vm.zone_reclaim_mode          0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag              1  
max_ptes_none       511  
max_ptes_shared     256  
max_ptes_swap       64  
pages_to_scan       4096  
scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release      Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)  
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

```
-----  
19. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0  
Filesystem      Type  Size  Used Avail Use% Mounted on  
tmpfs          tmpfs  70G   4.2G   66G   6% /mnt/ramdisk
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:        Dell Inc.  
Product:       PowerEdge XE9640  
Product Family: PowerEdge  
Serial:        MS01501
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

### 21. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

16x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800

---

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 0.4.32  
BIOS Date: 04/25/2023  
BIOS Revision: 0.4

## Compiler Version Notes

---

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

---

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

---

Fortran | 648.exchange2\_s(base, peak)

---

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



**SPEC CPU®2017 Integer Speed Result**

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc. PowerEdge XE9640 (Intel Xeon Platinum 8468)	SPECspeed®2017_int_base = 14.7  <b>SPECspeed®2017_int_peak = 15.0</b>
<b>CPU2017 License:</b> 6573 <b>Test Sponsor:</b> Dell Inc. <b>Tested by:</b> Dell Inc.	<b>Test Date:</b> May-2023 <b>Hardware Availability:</b> Sep-2023 <b>Software Availability:</b> Dec-2022

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## C++ benchmarks

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-floop -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-I/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks;

icx

## C++ benchmarks:

icpx

## Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: basepeak = yes
```

```
631.deepsjeng_s: basepeak = yes
```

```
641.leela_s: basepeak = yes
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.7

PowerEdge XE9640 (Intel Xeon Platinum 8468)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6573

**Test Date:** May-2023

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Sep-2023

**Tested by:** Dell Inc.

**Software Availability:** Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-04 11:06:27-0400.

Report generated on 2024-01-29 18:07:54 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.