SPEC CPU®2017 Floating Point Rate Result

Lenovo Global Technology

ThinkSystem SR630 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 557

SPECrate®2017_fp_peak = Not Run

CPU2017 License:	9017	**Test Date:**	Feb-2024
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Feb-2024
Tested by:	Lenovo Global Technology	**Software Availability:**	Dec-2023

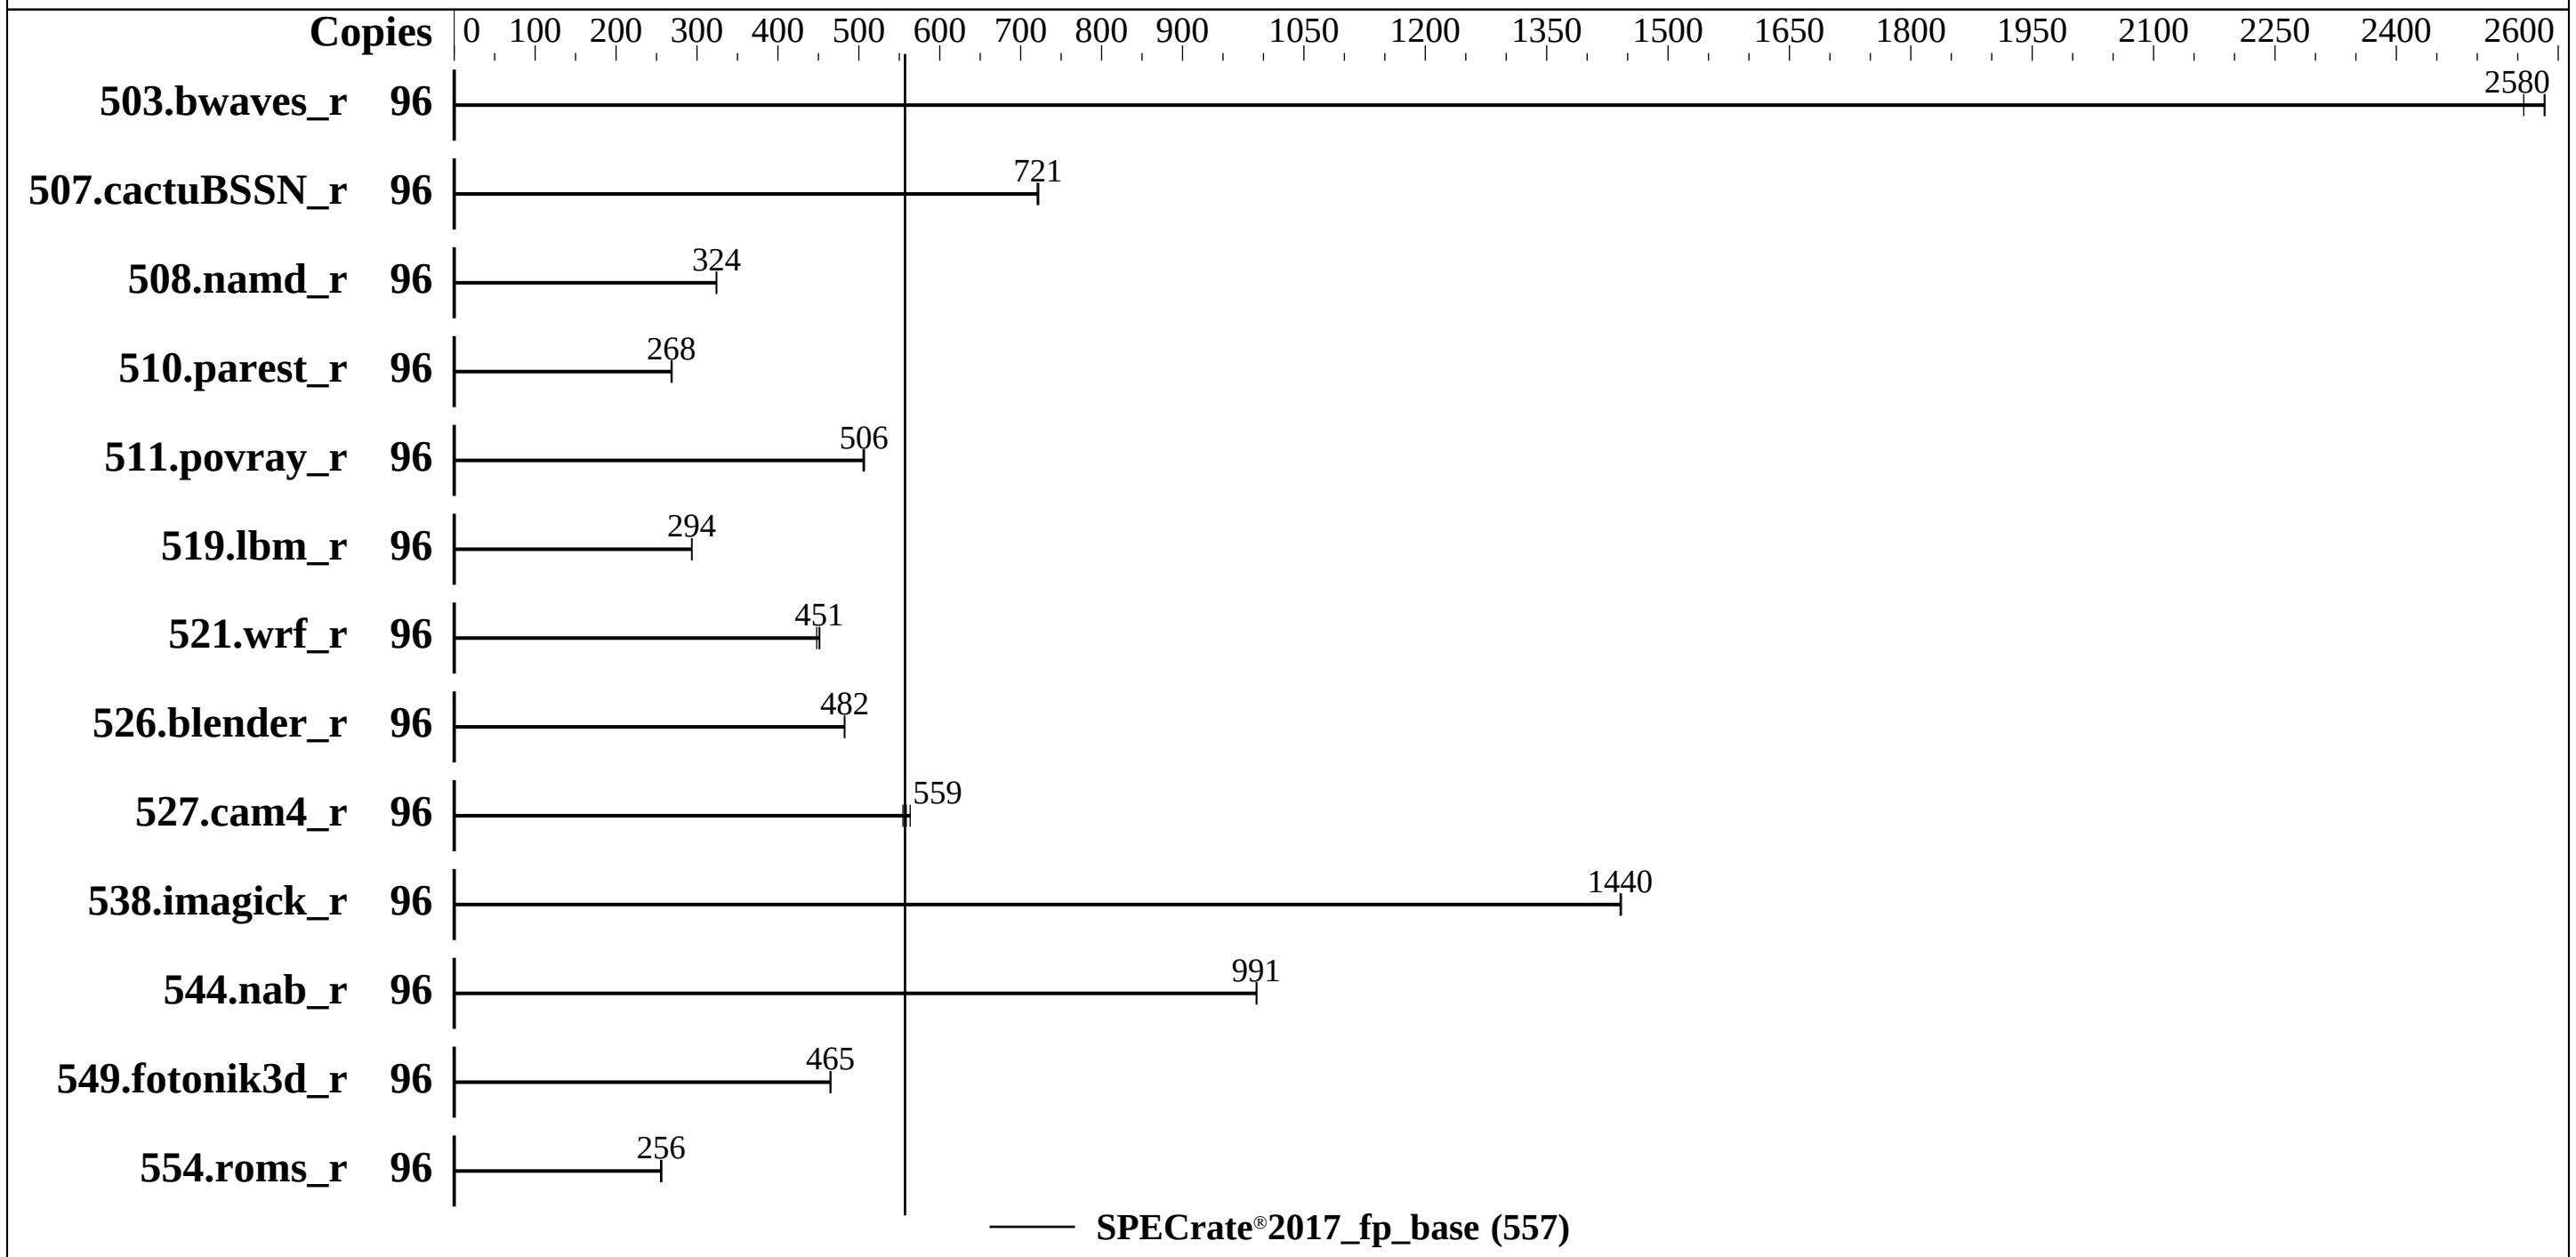

Hardware

CPU Name:	Intel Xeon Silver 4516Y+
Max MHz:	3700
Nominal:	2200
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	45 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 Kernel 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version ESE121V 3.10 released Jan-2024
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Lenovo Global Technology

ThinkSystem SR630 V3
(2.20 GHz, Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 557

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
503.bwaves_r	96	**373**	**2580**	373	2580	376	2560							
507.cactuBSSN_r	96	168	722	169	720	**168**	**721**							
508.namd_r	96	282	324	**281**	**324**	281	324							
510.parest_r	96	933	269	**936**	**268**	937	268							
511.povray_r	96	444	505	442	507	**443**	**506**							
519.lbm_r	96	**345**	**294**	345	293	345	294							
521.wrf_r	96	**477**	**451**	476	452	480	448							
526.blender_r	96	**303**	**482**	303	482	303	483							
527.cam4_r	96	**301**	**559**	298	563	303	554							
538.imagick_r	96	**166**	**1440**	166	1440	166	1440							
544.nab_r	96	163	992	163	991	**163**	**991**							
549.fotonik3d_r	96	**805**	**465**	805	464	804	465							
554.roms_r	96	595	256	598	255	**596**	**256**							

SPECrate®2017_fp_base = 557

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy
SNC set to SNC2
LLC Prefetch set to Disabled
AMP Prefetch set to Enable

 Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sat Feb 24 06:28:08 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    06:28:08 up 13:51,  1 user,  load average: 33.55, 77.59, 89.03
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
```

(Continued on next page)

Platform Notes (Continued)

```
  root     tty1     -                Fri16   13:45m  0.93s  0.01s /bin/bash ./speccpu_ny.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4126980
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4126980
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 /bin/bash ./speccpu_ny.sh
 /bin/bash ./speccpu_ny.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.329/templogs/preenv.fprate.329.0.log --lognum 329.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) SILVER 4516Y+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000200
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 24
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-23
    physical id 1: core ids 0-23
    physical id 0: apicids 0-47
    physical id 1: apicids 128-175
```

(Continued on next page)

Platform Notes (Continued)

```
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          96
   On-line CPU(s) list:             0-95
   Vendor ID:                       GenuineIntel
   Model name:                      INTEL(R) XEON(R) SILVER 4516Y+
   CPU family:                      6
   Model:                           207
   Thread(s) per core:              2
   Core(s) per socket:              24
   Socket(s):                       2
   Stepping:                        2
   BogoMIPS:                        4400.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                    cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                    arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       2.3 MiB (48 instances)
   L1i cache:                       1.5 MiB (48 instances)
   L2 cache:                        96 MiB (48 instances)
   L3 cache:                        90 MiB (2 instances)
   NUMA node(s):                    4
   NUMA node0 CPU(s):               0-11,48-59
   NUMA node1 CPU(s):               12-23,60-71
   NUMA node2 CPU(s):               24-35,72-83
   NUMA node3 CPU(s):               36-47,84-95
   Vulnerability Itlb multihit:     Not affected
   Vulnerability L1tf:              Not affected
   Vulnerability Mds:               Not affected
   Vulnerability Meltdown:          Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
   Vulnerability Srbds:             Not affected
   Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
```

(Continued on next page)

Platform Notes (Continued)

```
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     2.3M   12 Data            1    64        1             64
     L1i       32K     1.5M    8 Instruction     1    64        1             64
     L2         2M      96M   16 Unified         2  2048        1             64
     L3        45M      90M   15 Unified         3 49152        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-11,48-59
  node 0 size: 257672 MB
  node 0 free: 256082 MB
  node 1 cpus: 12-23,60-71
  node 1 size: 258041 MB
  node 1 free: 257005 MB
  node 2 cpus: 24-35,72-83
  node 2 size: 258041 MB
  node 2 free: 256961 MB
  node 3 cpus: 36-47,84-95
  node 3 size: 258012 MB
  node 3 free: 256937 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056531352 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 23 16:37

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                  issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                  smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc
                  rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
                  systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd
  generated       ntp_sync
  indirect        wickedd

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=efe3d3bb-d17b-48bc-af3c-7ee429916327
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing                1
  kernel.randomize_va_space            2
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes            0
  vm.dirty_background_ratio           10
  vm.dirty_bytes                       0
  vm.dirty_expire_centisecs         3000
  vm.dirty_ratio                      20
  vm.dirty_writeback_centisecs       500
  vm.dirtytime_expire_seconds      43200
  vm.extfrag_threshold               500
  vm.min_unmapped_ratio                1
  vm.nr_hugepages                      0
  vm.nr_hugepages_mempolicy            0
  vm.nr_overcommit_hugepages           0
  vm.swappiness                       60
  vm.watermark_boost_factor        15000
  vm.watermark_scale_factor           10
  vm.zone_reclaim_mode                 0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      xfs   894G  141G  753G  16% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR630 V3 MB,EGS,DDR5,NY,1U
    Product Family: ThinkSystem
    Serial:         1234567890

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    13x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4400
    3x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Lenovo
   BIOS Version:      ESE121V-3.10
   BIOS Date:         01/09/2024
   BIOS Revision:     3.10
   Firmware Revision: 3.90
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------

==========================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-23 17:28:08-0500.
Report generated on 2024-03-14 10:57:13 by CPU2017 PS formatter v6716.
Originally published on 2024-03-13.