



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

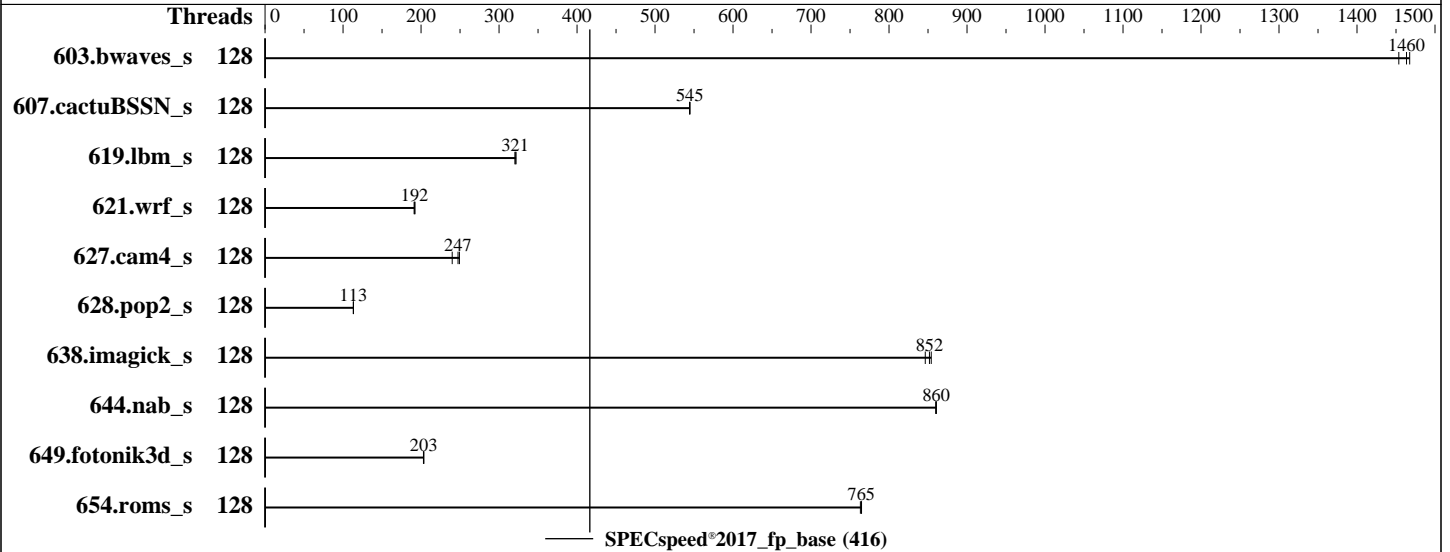

### Hardware

CPU Name: Intel Xeon Platinum 8592+  
 Max MHz: 3900  
 Nominal: 1900  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
 Storage: 1 x SATA M.2, 960GB  
 Other: CPU Cooling: DLC

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R2.4.0 for D3988-A1x. Released May-2024  
 tested as V1.0.0.0 R2.3.1 for D3988-A1x Mar-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	<b>40.3</b>	<b>1460</b>	40.6	1450	40.2	1470							
607.cactuBSSN_s	128	<b>30.6</b>	<b>545</b>	30.6	545	30.6	544							
619.lbm_s	128	16.3	322	<b>16.3</b>	<b>321</b>	16.3	321							
621.wrf_s	128	69.2	191	68.8	192	<b>68.9</b>	<b>192</b>							
627.cam4_s	128	36.9	240	35.6	249	<b>35.8</b>	<b>247</b>							
628.pop2_s	128	<b>105</b>	<b>113</b>	105	113	105	113							
638.imagick_s	128	17.0	846	16.9	854	<b>16.9</b>	<b>852</b>							
644.nab_s	128	20.3	861	20.3	860	<b>20.3</b>	<b>860</b>							
649.fotonik3d_s	128	<b>44.8</b>	<b>203</b>	44.8	203	44.9	203							
654.roms_s	128	<b>20.6</b>	<b>765</b>	20.6	765	20.6	763							

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
cpupower -c all frequency-set -g performance
echo 20000000 > /sys/kernel/debug/sched/wakeup_granularity_ns
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/benchmark/speccpu-23.2.3/lib/intel64:/home/benchmark/speccpu-23.2.3/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Apr-2024

**Hardware Availability:** May-2024

**Software Availability:** Dec-2023

## Platform Notes

BIOS configuration:  
 ASPM Support = Auto  
 Adjacent Cache Line Prefetch = Disabled  
 Override OS Energy Performance = Enabled  
 Energy Performance = Balanced Energy  
 LLC Prefetch = Enabled  
 CPU Performance Boost = Aggressive  
 DBP-F = Enabled  
 CPU C1 auto demotion = Enabled  
 CPU C1 auto undemotion = Enabled  
 IODC Configuration = Enable for Remote InvItOM and Remote WCiLF

Sysinfo program /home/benchmark/speccpu-23.2.3/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost.localdomain Tue Apr 2 01:33:31 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19\_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:33:31 up 31 min, 1 user, load average: 12.02, 72.25, 74.96
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      tty1     01:08   24:18  1.01s  0.19s  -bash
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124649
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124649
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=128 --tune base -o all --define
fpspeedaffinity --define drop_caches --define smt-on fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=128 --tune base --output_format all --define
fpspeedaffinity --define drop_caches --define smt-on --nopower --runmode speed --tune base --size refspped
fpspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu-23.2.3

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) PLATINUM 8592+
BIOS Model name:      INTEL(R) XEON(R) PLATINUM 8592+
CPU family:            6
Model:                 207
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):             2
Stepping:              2
CPU max MHz:           3900.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                        hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
                        flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-63,128-191
NUMA node1 CPU(s):    64-127,192-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-63,128-191
node 0 size: 515169 MB
node 0 free: 513714 MB
node 1 cpus: 64-127,192-255
node 1 size: 516054 MB
node 1 free: 514820 MB
node distances:
node  0  1
  0: 10  21
  1: 21  10

```

9. /proc/meminfo

MemTotal: 1055972560 kB

10. who -r

run-level 3 Apr 2 01:02

11. Systemd service manager version: systemd 252 (252-13.e19\_2)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount pmcd pmie pmlonger power-profiles-daemon
qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd
sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned
udisks2 upower vgauthd virtqemud vmttoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brlty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq fancontrol fcoe firewallld
grafana-server gssproxy iprump iprinit iprupdate iscsid iscsiuiop kpatch kvm_stat ledmon
libvirt-guests libvirtd lldpad man-db-restart-cache-update nfs-blkmap nfs-server nftables
nmb numad nvme-autoconnect ostree-readonly-sysroot-migration pfind pmie_farm
pmlonger_farm pmpoxy podman podman-auto-update podman-clean-transient podman-kube@
podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild rrdcached saslauthd selinux-check-proper-disable serial-getty@ smb
speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-nspawn@
systemd-pstore systemd-sysex target targetclid virtinterfaced virtnetworkd virtnodev
virtnwfilterd virtproxyd virtsecret virtstoraged wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=UUID=f5adb891-1095-4f52-8e35-a2c8d236c04d
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=cbd8592f-2c64-4ed4-b9ba-3ff32ad03af8
rhgb
quiet
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
  Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000
```

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.2 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)  
system-release Red Hat Enterprise Linux release 9.2 (Plow)

-----  
20. Disk information  
SPEC is set to: /home/benchmark/speccpu-23.2.3  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda5 xfs 590G 55G 535G 10% /home

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: FUJITSU  
Product: PRIMERGY CX2550 M7  
Product Family: SERVER  
Serial: BBBB000001

-----  
22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Hynix HMCG94AGBRA181N 64 GB 2 rank 5600

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: FUJITSU  
BIOS Version: V1.0.0.0 R2.3.1 for D3988-Alx  
BIOS Date: 03/26/2024  
BIOS Revision: 2.3  
Firmware Revision: 2.20

### Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Apr-2024  
**Hardware Availability:** May-2024  
**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Platinum 8592+, 1.90GHz

SPECspeed®2017\_fp\_base = 416

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Base Portability Flags (Continued)

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-02 01:33:30-0400.  
Report generated on 2024-04-24 14:36:21 by CPU2017 PDF formatter v6716.  
Originally published on 2024-04-24.