# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2560 M7, Intel Xeon Silver 4516Y+, 2.20GHz

SPECrate®2017_fp_base = 579

SPECrate®2017_fp_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Apr-2024
**Hardware Availability:** May-2024
**Software Availability:** Dec-2023

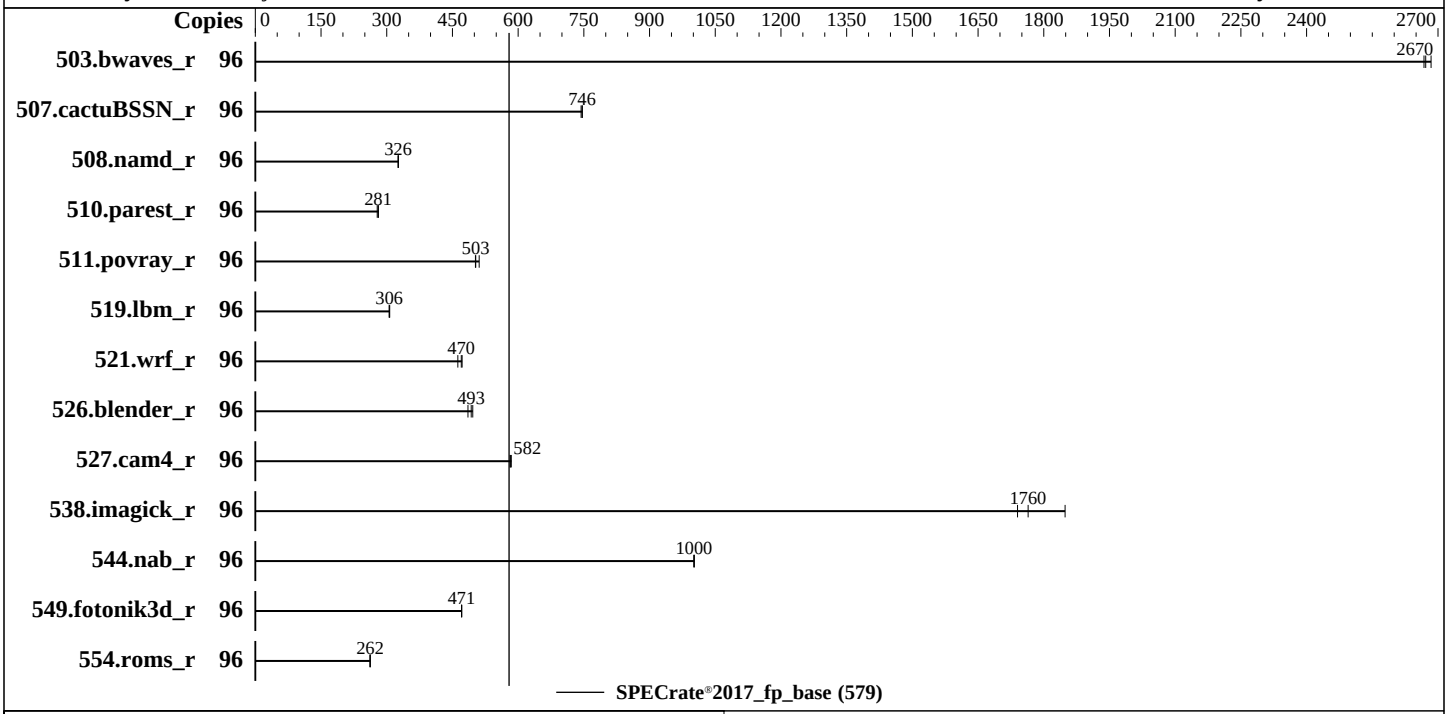


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Silver 4516Y+ |
| Max MHz: | 3700 |
| Nominal: | 2200 |
| Enabled: | 48 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 45 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400) |
| Storage: | 1 x SATA M.2, 960GB |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default |
| Compiler: | C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | Fujitsu BIOS Version V1.0.0.0 R2.4.0 for D3989-A1x. Released May-2024 tested as V1.0.0.0 R2.3.1 for D3989-A1x Mar-2024 |
| File System: | btrfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2560 M7, Intel Xeon Silver 4516Y+, 2.20GHz

SPECrate®2017_fp_base = 579

SPECrate®2017_fp_peak = Not Run

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Apr-2024
**Hardware Availability:** May-2024
**Software Availability:** Dec-2023

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 96 | 359 | 2680 | **360** | **2670** | 361 | 2670 | | | | | | | |
| 507.cactuBSSN_r | 96 | 163 | 746 | 163 | 744 | **163** | **746** | | | | | | | |
| 508.namd_r | 96 | 279 | 326 | **280** | **326** | 280 | 326 | | | | | | | |
| 510.parest_r | 96 | 903 | 278 | 894 | 281 | **895** | **281** | | | | | | | |
| 511.povray_r | 96 | 446 | 502 | **445** | **503** | 439 | 511 | | | | | | | |
| 519.lbm_r | 96 | 330 | 307 | **331** | **306** | 331 | 306 | | | | | | | |
| 521.wrf_r | 96 | 456 | 472 | 465 | 462 | **457** | **470** | | | | | | | |
| 526.blender_r | 96 | **297** | **493** | 301 | 485 | 295 | 496 | | | | | | | |
| 527.cam4_r | 96 | 287 | 584 | **288** | **582** | 289 | 582 | | | | | | | |
| 538.imagick_r | 96 | 129 | 1850 | **135** | **1760** | 137 | 1740 | | | | | | | |
| 544.nab_r | 96 | **161** | **1000** | 161 | 1000 | 161 | 1000 | | | | | | | |
| 549.fotonik3d_r | 96 | 794 | 471 | **795** | **471** | 795 | 471 | | | | | | | |
| 554.roms_r | 96 | **582** | **262** | 582 | 262 | 582 | 262 | | | | | | | |

**SPECrate®2017_fp_base = 579**

**SPECrate®2017_fp_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/benchmark/speccpu-24.0/lib/intel64:/home/benchmark/speccpu-24.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
Intel Virtualization Technology = Disabled
Utilization Profile = Unbalanced
CPU Performance Boost = Aggressive
SNC (Sub NUMA) = Enable SNC2

Sysinfo program /home/benchmark/speccpu-24.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Apr  4 17:53:20 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   17:53:20 up 1 min,  1 user,  load average: 0.53, 0.37, 0.15
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                17:51   16.00s  2.66s  0.19s -bash
```

**(Continued on next page)**

## Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4125045
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4125045
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=48 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=48 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu-24.0

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) SILVER 4516Y+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000200
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 24
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-23
    physical id 1: core ids 0-23
    physical id 0: apicids 0-47
    physical id 1: apicids 128-175
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.
```

**(Continued on next page)**

## Platform Notes (Continued)

```
------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          96
  On-line CPU(s) list:             0-95
  Vendor ID:                       GenuineIntel
  Model name:                      INTEL(R) XEON(R) SILVER 4516Y+
  CPU family:                      6
  Model:                           207
  Thread(s) per core:              2
  Core(s) per socket:              24
  Socket(s):                       2
  Stepping:                        2
  CPU max MHz:                     3700.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4400.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                                   avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                                   hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                                   avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                   avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                   enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                   amx_tile flush_l1d arch_capabilities
  L1d cache:                       2.3 MiB (48 instances)
  L1i cache:                       1.5 MiB (48 instances)
  L2 cache:                        96 MiB (48 instances)
  L3 cache:                        90 MiB (2 instances)
  NUMA node(s):                    4
  NUMA node0 CPU(s):               0-11,48-59
  NUMA node1 CPU(s):               12-23,60-71
  NUMA node2 CPU(s):               24-35,72-83
  NUMA node3 CPU(s):               36-47,84-95
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected
```

(Continued on next page)

## Platform Notes (Continued)

```
From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     2.3M   12 Data            1    64        1             64
     L1i       32K     1.5M    8 Instruction     1    64        1             64
     L2         2M      96M   16 Unified         2  2048        1             64
     L3        45M      90M   15 Unified         3 49152        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-11,48-59
  node 0 size: 257622 MB
  node 0 free: 257179 MB
  node 1 cpus: 12-23,60-71
  node 1 size: 258041 MB
  node 1 free: 257508 MB
  node 2 cpus: 24-35,72-83
  node 2 size: 258007 MB
  node 2 free: 257398 MB
  node 3 cpus: 36-47,84-95
  node 3 size: 257619 MB
  node 3 free: 257224 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056042104 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 4 17:51

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                   iscsi issue-generator kbdsettings kdump kdump-early klog libvirtd lvm2-monitor nscd
                   postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info
                   firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd iscsi-init iscsid
                   issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
                   nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd serial-getty@
                   smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve
                   systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                 virtnodedevd virtnwfilterd virtproxyd virtqemud virtsecretd virtstoraged vncserver@
  indirect       pcscd virtlockd virtlogd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
  root=UUID=9c131c09-0ac8-4880-b3dc-37fa10c43cda
  splash=silent
  quiet
  security=apparmor
  crashkernel=401M,high
  crashkernel=72M,low
  mitigations=auto

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.70 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/benchmark/speccpu-24.0
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda2      btrfs  892G   41G  851G   5% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         FUJITSU
    Product:        n/a
    Product Family: SERVER
    Serial:         n/a

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800, configured at 4400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       FUJITSU
   BIOS Version:      V1.0.0.0 R2.3.1 for D3989-A1x
   BIOS Date:         03/26/2024
   BIOS Revision:     2.3
   Firmware Revision: 2.38
```

## Compiler Version Notes

```
==============================================================================================================
C              | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++            | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C         | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevD.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.



Tested with SPEC CPU®2017 v1.1.9 on 2024-04-04 04:53:19-0400.
Report generated on 2024-04-24 14:39:30 by CPU2017 PS formatter v6716.
Originally published on 2024-04-24.