



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

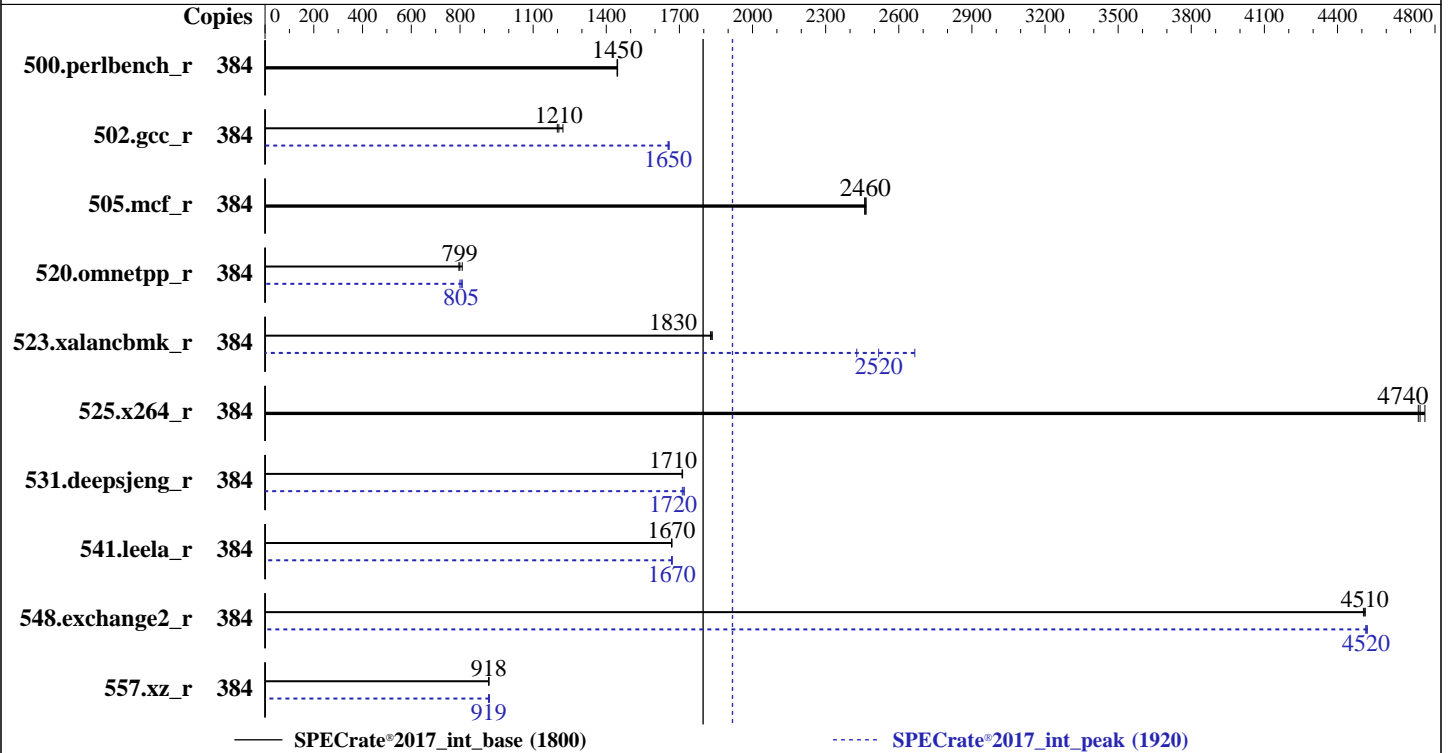

Hardware

CPU Name: AMD EPYC 9654
 Max MHz: 3700
 Nominal: 2400
 Enabled: 192 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux release 9 (Plow)
 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 4.02.28 released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	423	1450	423	1450	423	1440	384	423	1450	423	1450	423	1440
502.gcc_r	384	445	1220	451	1210	454	1200	384	328	1660	329	1650	329	1650
505.mcf_r	384	252	2460	252	2470	252	2460	384	252	2460	252	2470	252	2460
520.omnetpp_r	384	623	809	630	799	633	795	384	630	800	622	809	626	805
523.xalancbmk_r	384	221	1840	222	1830	222	1830	384	167	2430	161	2520	152	2670
525.x264_r	384	142	4730	141	4760	142	4740	384	142	4730	141	4760	142	4740
531.deepsjeng_r	384	257	1710	257	1710	257	1710	384	256	1720	257	1710	256	1720
541.leela_r	384	381	1670	381	1670	381	1670	384	381	1670	381	1670	381	1670
548.exchange2_r	384	223	4510	223	4510	223	4510	384	223	4520	222	4520	223	4520
557.xz_r	384	451	919	452	917	452	918	384	452	917	451	919	451	920

SPECrate®2017_int_base = **1800**

SPECrate®2017_int_peak = **1920**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib:/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
SVM Mode set to Disable
DRAM Scrub time set to Disable
NUMA nodes per socket set to NPS4
Determinism Slider set to Power
cTDP set to 400
Package Power Limit set to 400

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Mar 24 21:09:42 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
21:09:42 up 3 min, 1 user, load average: 0.23, 0.31, 0.15
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    21:08   22.00s  1.47s  0.25s  /bin/bash ./amd_rate_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 6190962
max locked memory            (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 6190962
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id      : AuthenticAMD
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa10113e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 96
siblings        : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9654 96-Core Processor
BIOS Model name:      AMD EPYC 9654 96-Core Processor
CPU family:           25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             2
Stepping:              1
Frequency boost:      enabled
CPU max MHz:          3707.8120
CPU min MHz:          1500.0000
BogoMIPS:              4792.85
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512v1 xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             6 MiB (192 instances)
L1i cache:             6 MiB (192 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

L2 cache:                192 MiB (192 instances)
L3 cache:                768 MiB (24 instances)
NUMA node(s):           8
NUMA node0 CPU(s):      0-23,192-215
NUMA node1 CPU(s):      24-47,216-239
NUMA node2 CPU(s):      48-71,240-263
NUMA node3 CPU(s):      72-95,264-287
NUMA node4 CPU(s):      96-119,288-311
NUMA node5 CPU(s):      120-143,312-335
NUMA node6 CPU(s):      144-167,336-359
NUMA node7 CPU(s):      168-191,360-383
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                          filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-23,192-215
node 0 size: 193240 MB
node 0 free: 191572 MB
node 1 cpus: 24-47,216-239
node 1 size: 193525 MB
node 1 free: 192692 MB
node 2 cpus: 48-71,240-263
node 2 size: 193525 MB
node 2 free: 192795 MB
node 3 cpus: 72-95,264-287
node 3 size: 193525 MB
node 3 free: 192761 MB
node 4 cpus: 96-119,288-311
node 4 size: 193525 MB
node 4 free: 192910 MB
node 5 cpus: 120-143,312-335
node 5 size: 193525 MB
node 5 free: 192770 MB
node 6 cpus: 144-167,336-359
node 6 size: 193525 MB
node 6 free: 192817 MB
node 7 cpus: 168-191,360-383
node 7 size: 193450 MB
node 7 free: 192706 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

```
-----
9. /proc/meminfo
   MemTotal:      1584993704 kB
-----
```

```
-----
10. who -r
    run-level 3 Mar 24 21:06
-----
```

```
-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target   Status
    multi-user       running
-----
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         dbus-broker getty@ tuned udisks2 upower
    enabled-runtime systemd-remount-fs
    disabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
                    blk-availability canberra-system-bootup canberra-system-shutdown
                    canberra-system-shutdown-reboot chrony-chrony chronyd console-getty cpupower crond
                    debug-shell firewallld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
                    mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild
                    rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
                    systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
    indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
-----
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
    root=/dev/mapper/rhel-root
    ro
    resume=/dev/mapper/rhel-swap
    rd.lvm.lv=rhel/root
    rd.lvm.lv=rhel/swap
-----
```

```
-----
14. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 2400MHz
-----
```

```
-----
15. tuned-adm active
    Current active profile: throughput-performance
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----
20. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  819G  29G  790G   4% /home

-----
21. /sys/devices/virtual/dmi/id
Vendor:      IEIT
Product:     NF5180-A7-A0-R0-00
Product Family: Not specified
Serial:      000000000

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x Hynix HMCG94MEBRA109N 64 GB 2 rank 4800
6x Samsung M329R8GA0BB0-CQKDG 64 GB 2 rank 4800
10x Samsung M329R8GA0BB0-CQKEG 64 GB 2 rank 4800
5x Samsung M329R8GA0BB0-CQKVG 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 04.02.28
BIOS Date: 01/04/2024

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Compiler Version Notes (Continued)

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358
Test Sponsor: IEIT Systems Co., Ltd.
Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Peak Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017_int_base = 1800

NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamalloc-ext
```

531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamalloc-ext
```

541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.
NF5180A7 (AMD EPYC 9654)

SPECrate®2017_int_base = 1800

SPECrate®2017_int_peak = 1920

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Mar-2024

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Peak Other Flags (Continued)

```
523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument  
-L/home/work/cpu2017/v118/aocc4/bl/rate/amd_rate_aocc400_genoa_B_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-24 21:09:41-0400.

Report generated on 2024-05-07 22:14:42 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.