



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

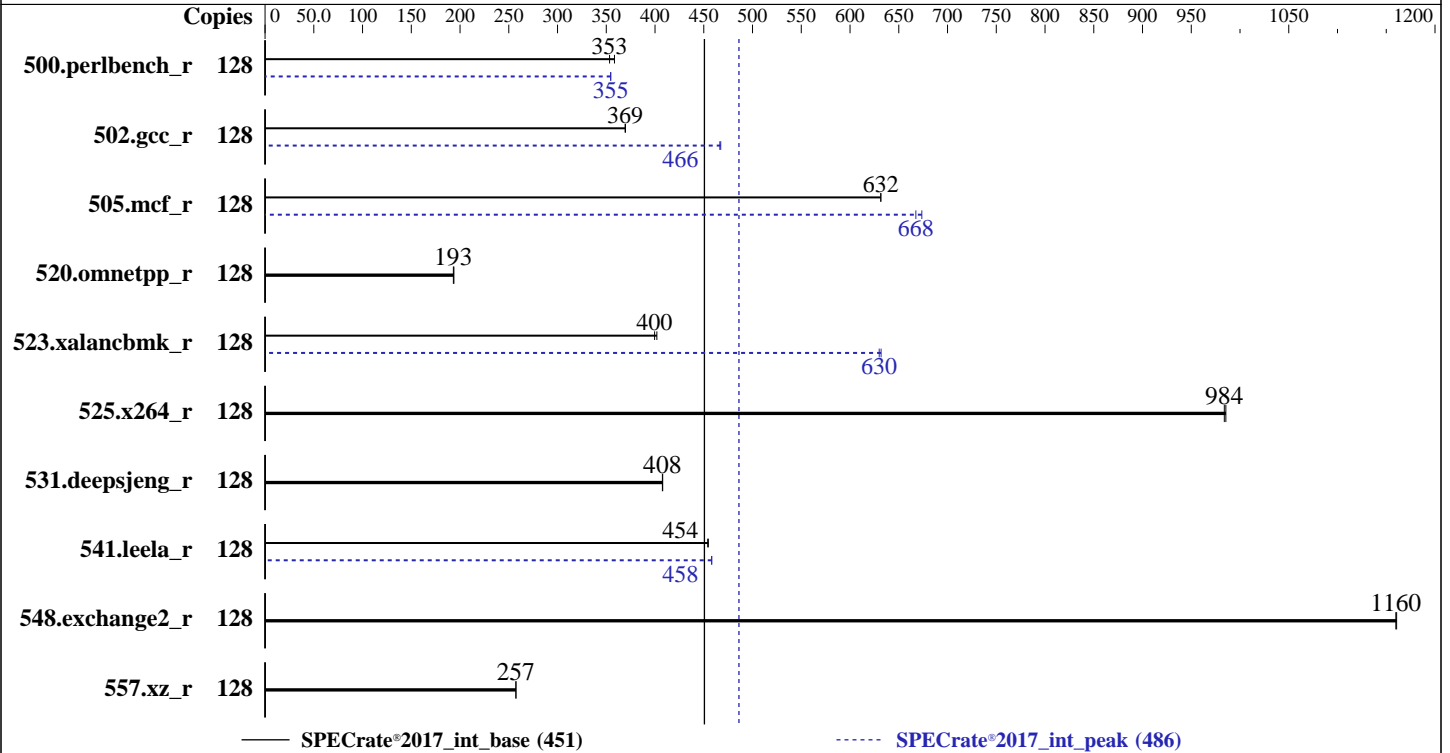

Hardware

CPU Name: AMD EPYC 7513
 Max MHz: 3650
 Nominal: 2600
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 80 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.4 LTS
 5.15.0-102-generic
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: No
 Firmware: Version 2.5.6 released Oct-2021
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: Jun-2021
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	569	358	<u>577</u>	<u>353</u>			128	<u>575</u>	<u>355</u>	575	355		
502.gcc_r	128	490	370	<u>491</u>	<u>369</u>			128	<u>389</u>	<u>466</u>	388	467		
505.mcf_r	128	<u>328</u>	<u>632</u>	327	632			128	<u>310</u>	<u>668</u>	307	674		
520.omnetpp_r	128	867	194	<u>869</u>	<u>193</u>			128	867	194	<u>869</u>	<u>193</u>		
523.xalancbmk_r	128	<u>338</u>	<u>400</u>	336	402			128	214	632	<u>215</u>	<u>630</u>		
525.x264_r	128	<u>228</u>	<u>984</u>	227	985			128	<u>228</u>	<u>984</u>	227	985		
531.deepsjeng_r	128	360	408	<u>360</u>	<u>408</u>			128	360	408	<u>360</u>	<u>408</u>		
541.leela_r	128	466	455	<u>467</u>	<u>454</u>			128	<u>463</u>	<u>458</u>	463	458		
548.exchange2_r	128	<u>289</u>	<u>1160</u>	289	1160			128	<u>289</u>	<u>1160</u>	289	1160		
557.xz_r	128	537	257	<u>537</u>	<u>257</u>			128	537	257	<u>537</u>	<u>257</u>		

SPECrate®2017_int_base = 451

SPECrate®2017_int_peak = 486

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-aocc320-A1/amd_rate_aocc320_milanx_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc320-A1/amd_rate_aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

DRAM Refresh Delay : Performance

Memory Interleaving : Disabled

DIMM Self Healing on

Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled

NUMA Nodes per Socket : 4

L3 cache as NUMA Domain : Enabled

System Profile : Custom

CPU Power Management : Maximum Performance

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc320-A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-sut Thu Apr 11 14:29:35 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
2. w

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Platform Notes (Continued)

```

3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux amd-sut 5.15.0-102-generic #112-Ubuntu SMP Tue Mar 5 16:50:32 UTC 2024 x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
14:29:36 up 1 min, 1 user, load average: 0.69, 0.33, 0.12
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
root      tty1    -              14:28       1:10       1.61s     0.33s    /bin/bash ./amd_rate_aocc320_milanx_A1.sh

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes)  2097152
process                 4126162
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

```

-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: Jun-2021
Software Availability: Mar-2024

Platform Notes (Continued)

```
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-3.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc320_milanx_A1.py
/bin/bash ./amd_rate_aocc320_milanx_A1.sh
runcpu --config amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-3.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt intrate
runcpu --configfile amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-3.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.2 --output_format html,pdf,txt --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note:preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc320-A1
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 7513 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 1
stepping       : 1
microcode      : 0xa0011d1
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 2560 4K pages
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 64-127
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 7513 32-Core Processor
CPU family:            25
Model:                 1
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
Stepping:              1
BogoMIPS:              5190.75
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: Jun-2021
Software Availability: Mar-2024

Platform Notes (Continued)

cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid
overflow_recov succor smca

Virtualization: AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 32 MiB (64 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL  SETS  PHY-LINE  COHERENCY-SIZE
  L1d   32K      2M      8 Data             1     64     1          64
  L1i   32K      2M      8 Instruction       1     64     1          64
  L2    512K     32M      8 Unified           2    1024     1          64
  L3    32M     256M     16 Unified           3   32768     1          64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 128537 MB
node 0 free: 124520 MB
node 1 cpus: 8-15,72-79
node 1 size: 129019 MB
node 1 free: 128589 MB
node 2 cpus: 16-23,80-87
node 2 size: 129019 MB
node 2 free: 128584 MB
node 3 cpus: 24-31,88-95
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Platform Notes (Continued)

```

node 3 size: 129004 MB
node 3 free: 128580 MB
node 4 cpus: 32-39,96-103
node 4 size: 129019 MB
node 4 free: 128682 MB
node 5 cpus: 40-47,104-111
node 5 size: 129019 MB
node 5 free: 128741 MB
node 6 cpus: 48-55,112-119
node 6 size: 129019 MB
node 6 free: 128728 MB
node 7 cpus: 56-63,120-127
node 7 size: 129011 MB
node 7 free: 128705 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  11  11  11  32  32  32  32
1:  11  10  11  11  32  32  32  32
2:  11  11  10  11  32  32  32  32
3:  11  11  11  10  32  32  32  32
4:  32  32  32  32  10  11  11  11
5:  32  32  32  32  11  10  11  11
6:  32  32  32  32  11  11  10  11
7:  32  32  32  32  11  11  11  10

```

```

9. /proc/meminfo
   MemTotal:      1056413656 kB

```

```

10. who -r
    run-level 3 Apr 11 14:27

```

```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
    Default Target  Status
    multi-user      running

```

```

12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         blk-availability console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                    grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors networkd-dispatcher
                    open-vm-tools pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd systemd-pstore
                    systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                    vgauth wpa_supplicant
    enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled        ModemManager apparmor console-getty debug-shell iscsid lvm2-monitor lxd-agent multipathd
                    nftables open-iscsi rsync serial-getty@ systemd-boot-check-no-failures
                    systemd-network-generator systemd-sysextd systemd-time-wait-sync ufw upower
                    wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
    generated       apport
    indirect         uidd
    masked          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online cryptdisks
                    cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                    systemd-networkd-wait-online x11-common

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.15.0-102-generic

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Platform Notes (Continued)

```
root=UUID=593ab29a-c8fe-4d75-821a-b60d5c945311
ro
```

14. cpupower frequency-info

```
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2600MHz
```

15. tuned-adm active

```
Current active profile: latency-performance
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer+madvise [madvise] never
enabled         always [madvise] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

19. OS release

```
From /etc/*-release /etc/*-version
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: Jun-2021
Software Availability: Mar-2024

Platform Notes (Continued)

os-release Ubuntu 22.04.4 LTS

20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc320-A1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 80G 3.4G 77G 5% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge C6525
Product Family: PowerEdge
Serial: SL5C654

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x 80AD869D80AD HMAA8GR7AJR4N-XN 64 GB 2 rank 3200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 2.5.6
BIOS Date: 10/06/2021
BIOS Revision: 2.5

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C | 502.gcc_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 523.xalancbmk_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

```

C++ benchmarks:

```

-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2024
Hardware Availability: Jun-2021
Software Availability: Mar-2024

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264_r:basepeak = yes

557.xz_r:basepeak = yes

C++ benchmarks:

520.omnetpp_r:basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng_r:basepeak = yes

```
541.leela_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 451

PowerEdge C6525 (AMD EPYC 7513 32-Core Processor)

SPECrate®2017_int_peak = 486

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2021

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-11 10:29:35-0400.

Report generated on 2024-05-07 22:17:22 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.