



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECSpeed®2017_fp_base = 61.1

SPECSpeed®2017_fp_peak = 61.3

CPU2017 License: 001176


Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

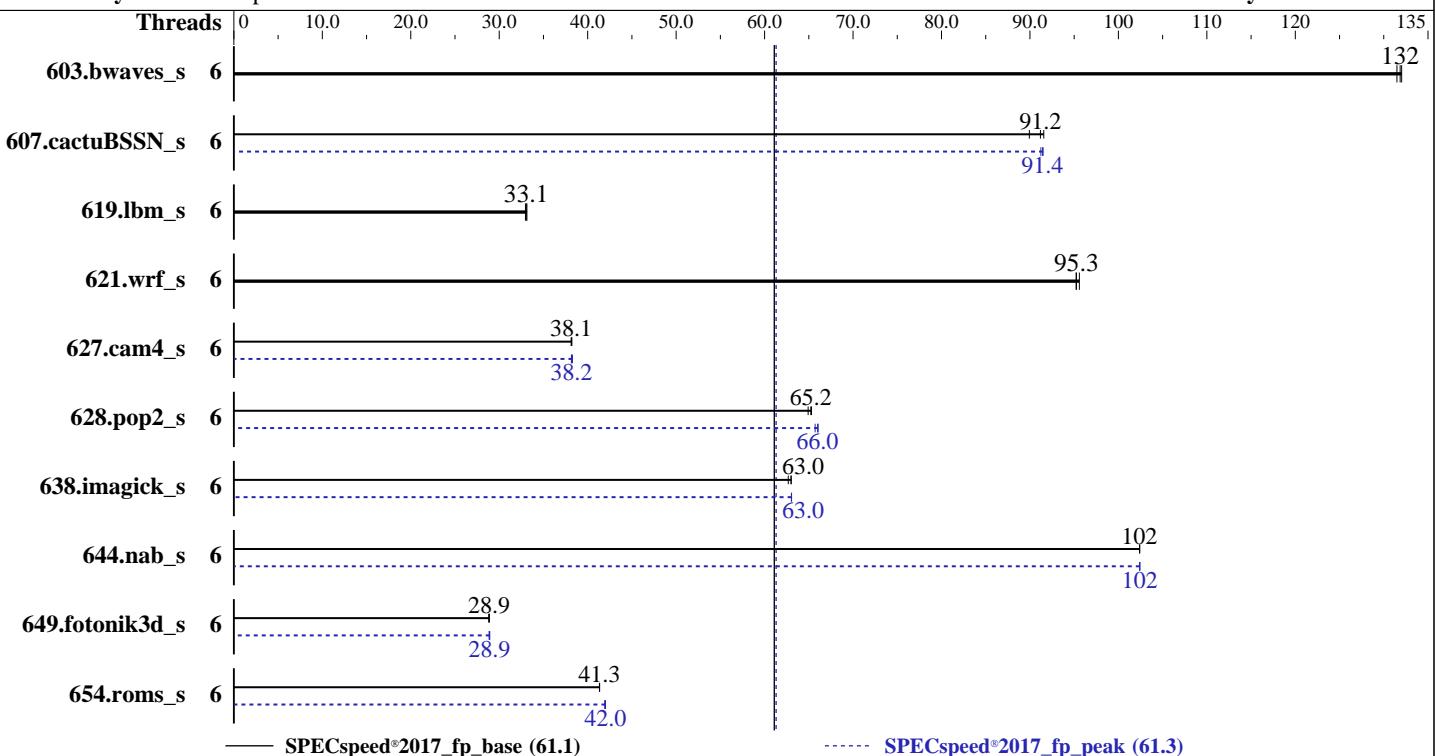

Hardware	
CPU Name:	AMD EPYC 4244P
Max MHz:	5100
Nominal:	3800
Enabled:	6 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	32 MB I+D on chip per chip
Other:	None
Memory:	64 GB (2 x 32 GB 2Rx8 PC5-5600B-U, running at 5200)
Storage:	1 x 960 GB NVMe SSD
Other:	CPU Cooling: Air

Software	
OS:	Ubuntu 22.04.4 LTS
Compiler:	Kernel 6.5.0-27-generic
Parallel:	C/C++/Fortran: Version 4.0.0 of AOCC
Firmware:	Yes
File System:	Version 1.2a released Feb-2024
System State:	ext4
Base Pointers:	Run level 5 (multi-user)
Peak Pointers:	64-bit
Other:	64-bit
Power Management:	None
	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	6	447	132	449	131	447	132	6	447	132	449	131	447	132
607.cactuBSSN_s	6	185	89.9	183	91.2	182	91.6	6	182	91.5	182	91.4	183	91.2
619.lbm_s	6	158	33.1	158	33.1	159	33.0	6	158	33.1	158	33.1	159	33.0
621.wrf_s	6	138	95.6	139	95.2	139	95.3	6	138	95.6	139	95.2	139	95.3
627.cam4_s	6	232	38.2	232	38.1	232	38.1	6	232	38.2	232	38.3	232	38.2
628.pop2_s	6	182	65.2	182	65.3	183	64.9	6	180	66.0	181	65.7	180	66.1
638.imagick_s	6	229	63.0	229	63.0	230	62.7	6	229	63.0	229	63.0	229	63.0
644.nab_s	6	171	102	171	102	171	102	6	171	102	171	102	171	102
649.fotonik3d_s	6	316	28.9	316	28.9	316	28.8	6	315	28.9	316	28.9	315	28.9
654.roms_s	6	381	41.4	381	41.3	381	41.3	6	375	42.0	376	41.9	375	42.0

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Operating System Notes (Continued)

To disable THP for peak runs of 621.wrf_s:

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

To enable THP only on request for peak runs of 654.roms_s:

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-5"  
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A/lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "6"
```

Environment variables set by runcpu during the 607.cactubssn_s peak run:

```
GOMP_CPU_AFFINITY = "0-5"
```

Environment variables set by runcpu during the 627.cam4_s peak run:

```
GOMP_CPU_AFFINITY = "0-5"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-5"
```

Environment variables set by runcpu during the 638.imagick_s peak run:

```
GOMP_CPU_AFFINITY = "0-5"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0-5"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-5"  
PGHPF_ZMEM = "yes"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0 3 1 4 2 5"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECSpeed®2017_fp_base = 61.1

SPECSpeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Platform Notes

BIOS Settings:

SMT Control = Disable

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on as-1015a-mt Wed Apr 17 11:03:13 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux as-1015a-mt 6.5.0-27-generic #28~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar 15 10:51:06 UTC 2 x86_64
x86_64 x86_64 GNU/Linux

2. w
11:03:13 up 5 min, 4 users, load average: 0.14, 0.04, 0.01

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
lab	tty1	-		11:00	32.00s	0.46s	0.00s -bash
lab	pts/0	-		11:00	32.00s	0.88s	0.43s sudo su -
lab	tty2	-		11:02	22.00s	0.02s	0.00s -bash
lab	pts/1	-		11:02	22.00s	0.00s	0.01s sudo su -

3. Username
From environment variable \$USER: root
From the command 'logname': lab

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Platform Notes (Continued)

```
data(kbytes)      unlimited
stack(kbytes)    unlimited
coredump(blocks) 0
memory(kbytes)   unlimited
locked memory(kbytes) 2097152
process          253508
nofiles          1024
vmmemory(kbytes) unlimited
locks            unlimited
rtprio           0
```

```
-----  
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo
model name      : AMD EPYC 4244P 6-Core Processor
vendor_id        : AuthenticAMD
cpu family      : 25
model           : 97
stepping         : 2
microcode        : 0xa601206
bugs             : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size         : 3584 4K pages
cpu cores       : 6
siblings         : 6
1 physical ids (chips)
6 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-5
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                6
On-line CPU(s) list:  0-5
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 4244P 6-Core Processor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Platform Notes (Continued)

CPU family:	25
Model:	97
Thread(s) per core:	1
Core(s) per socket:	6
Socket(s):	1
Stepping:	2
CPU max MHz:	5170.0000
CPU min MHz:	400.0000
BogoMIPS:	7585.57
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsqsgbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid overflow_recov succor smca flush_lld
Virtualization:	AMD-V
L1d cache:	192 KiB (6 instances)
L1i cache:	192 KiB (6 instances)
L2 cache:	6 MiB (6 instances)
L3 cache:	32 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-5
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Mitigation; Safe RET
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	192K	8	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	1M	6M	8	Unified	2	2048	1	64
L3	32M	32M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Platform Notes (Continued)

```
node 0 size: 63431 MB
node 0 free: 62923 MB
node distances:
node 0
 0: 10

-----
9. /proc/meminfo
  MemTotal:       64953564 kB

-----
10. who -r
 run-level 5 Apr 17 11:00

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
  Default Target      Status
  graphical           degraded

-----
12. Failed units, from systemctl list-units --state=failed
          LOAD ACTIVE SUB   DESCRIPTION
 * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

-----
13. Services, from systemctl list-unit-files
 STATE      UNIT FILES
 enabled    ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
             cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
             grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
             lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
             secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
             systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
             vauth
 enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
 disabled     console-getty debug-shell iscsid nftables rsync serial-getty@
             systemd-boot-check-no-failures systemd-network-generator systemd-sysext
             systemd-time-wait-sync upower
 generated    apport
 indirect     uidd
 masked      cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
             x11-common

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.5.0-27-generic
  root=UUID=493aa310-a89f-44f0-97e2-e438e6abbb08
  ro

-----
15. cpupower frequency-info
 analyzing CPU 5:
  current policy: frequency should be within 400 MHz and 5.17 GHz.
  The governor "performance" may decide which speed to use
  within this range.
 boost state support:
  Supported: yes
  Active: yes
  Boost States: 0
  Total States: 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECSpeed®2017_fp_base = 61.1

SPECSpeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Platform Notes (Continued)

Pstate-P0: 3800MHz

```
16. sysctl
    kernel.numa_balancing          0
    kernel.randomize_va_space      0
    vm.compaction_proactiveness   20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs    3000
    vm.dirty_ratio                 8
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold          500
    vm.min_unmapped_ratio         1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy      0
    vm.nr_overcommit_hugepages     0
    vm.swappiness                  1
    vm.watermark_boost_factor     15000
    vm.watermark_scale_factor      10
    vm.zone_reclaim_mode           1
```

```
17. /sys/kernel/mm/transparent_hugepage
    defrag           [always] defer defer+madvise madvise never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
```

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000
```

```
19. OS release
    From /etc/*-release /etc/*-version
    os-release Ubuntu 22.04.4 LTS
```

```
20. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem  Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p2  ext4  879G  17G  817G  3% /
```

```
21. /sys/devices/virtual/dmi/id
    Vendor:        Supermicro
    Product:       Super Server
    Product Family: Family
    Serial:        0123456789
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Micron Technology MTC16C2085S1UC56BGZ 32 GB 2 rank 5600, configured at 5200
2x NO DIMM NO DIMM

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.2a
BIOS Date: 02/15/2024
BIOS Revision: 5.32

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -floop -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECSpeed®2017_fp_base = 61.1

SPECSpeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIB -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIB -ffast-math -fopenmp -flft -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIB -ffast-math -fopenmp -flft -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECSpeed®2017_fp_base = 61.1

SPECSpeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECspeed®2017_fp_base = 61.1

SPECspeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: basepeak = yes
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
654.roms_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: basepeak = yes
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECSpeed®2017_fp_base = 61.1

SPECSpeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-AM5-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-AM5-revA.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -1015A-MT
(H13SAE-MF , AMD EPYC 4244P)

SPECSpeed®2017_fp_base = 61.1

SPECSpeed®2017_fp_peak = 61.3

CPU2017 License: 001176

Test Date: Apr-2024

Test Sponsor: Supermicro

Hardware Availability: May-2024

Tested by: Supermicro

Software Availability: Mar-2024

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-17 07:03:12-0400.

Report generated on 2024-05-21 19:20:19 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-21.