# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

## FusionServer 5288 V7 (Intel Xeon Gold 5520+)

**SPECrate®2017_fp_base = 713**

**SPECrate®2017_fp_peak = 734**

**CPU2017 License:** 6488
**Test Sponsor:** xFusion
**Tested by:** xFusion

**Test Date:** May-2024
**Hardware Availability:** Dec-2023
**Software Availability:** Dec-2023

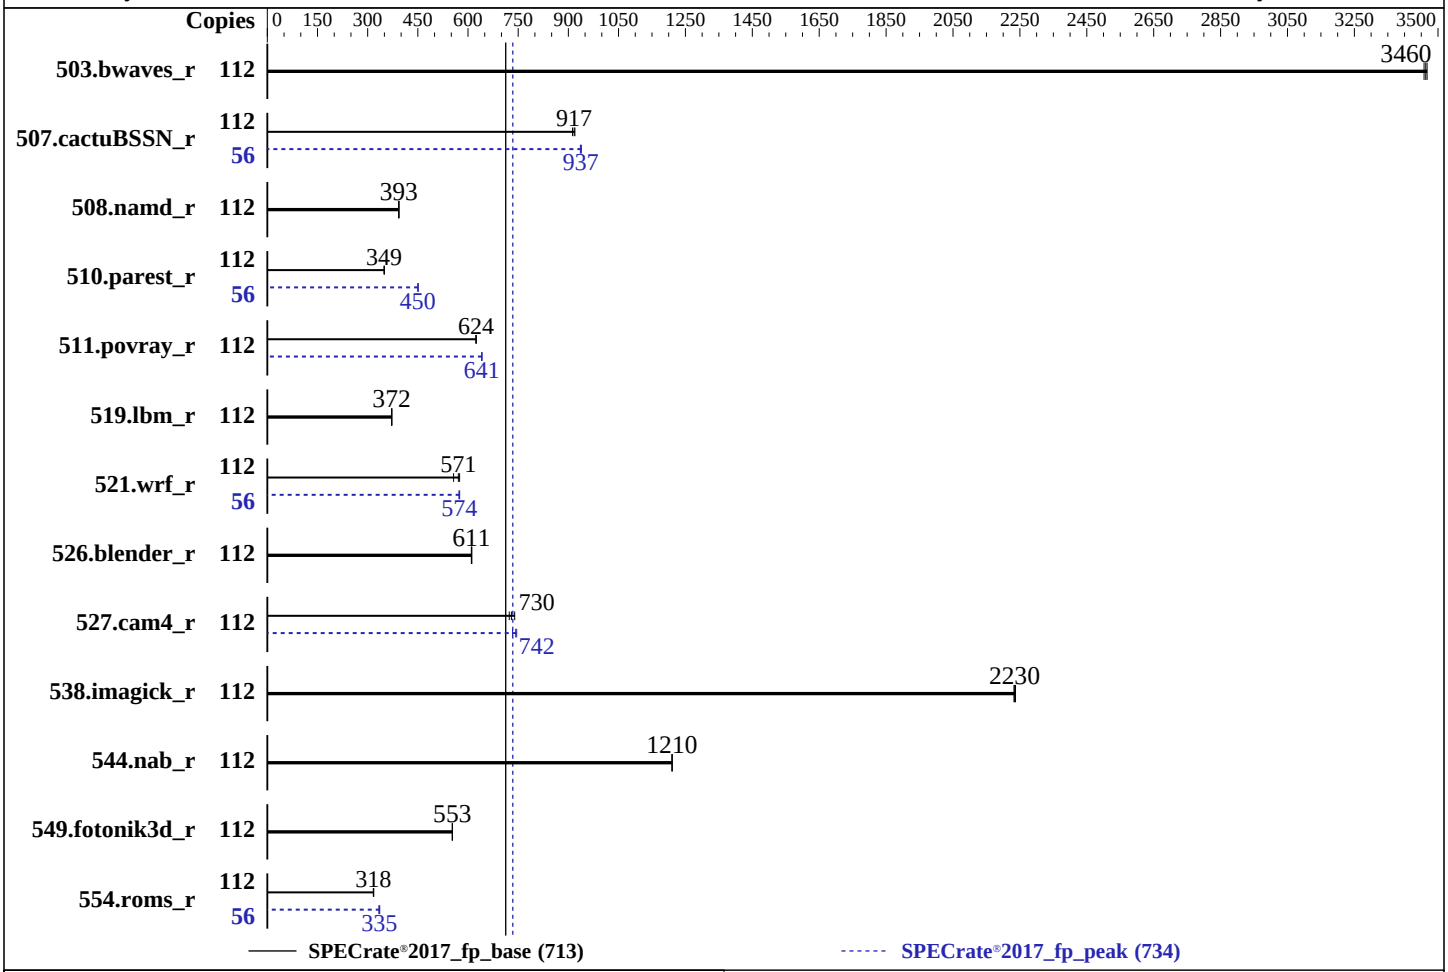


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 5520+ |
| Max MHz: | 4000 |
| Nominal: | 2200 |
| Enabled: | 56 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 52.5 MB I+D on chip per chip |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 4800) |
| Storage: | 1 x 960 GB SATA SSD |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 9.2 (Plow) 5.14.0-284.11.1.el9_2.x86_64 |
| Compiler: | C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | Version 01.01.03.05 Released Apr-2024 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

## FusionServer 5288 V7 (Intel Xeon Gold 5520+)

SPECrate®2017_fp_base = 713

SPECrate®2017_fp_peak = 734

**CPU2017 License:** 6488
**Test Sponsor:** xFusion
**Tested by:** xFusion

**Test Date:** May-2024
**Hardware Availability:** Dec-2023
**Software Availability:** Dec-2023

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 112 | **324** | **3460** | 325 | 3460 | 324 | 3470 | 112 | **324** | **3460** | 325 | 3460 | 324 | 3470 |
| 507.cactuBSSN_r | 112 | 154 | 920 | 155 | 912 | **155** | **917** | 56 | 75.5 | 939 | 75.7 | 936 | **75.6** | **937** |
| 508.namd_r | 112 | 271 | 393 | **271** | **393** | 271 | 393 | 112 | 271 | 393 | **271** | **393** | 271 | 393 |
| 510.parest_r | 112 | 839 | 349 | 837 | 350 | **839** | **349** | 56 | 325 | 451 | **325** | **450** | 325 | 450 |
| 511.povray_r | 112 | **419** | **624** | 419 | 625 | 419 | 624 | 112 | 408 | 641 | **408** | **641** | 408 | 641 |
| 519.lbm_r | 112 | **317** | **372** | 317 | 372 | 317 | 372 | 112 | **317** | **372** | 317 | 372 | 317 | 372 |
| 521.wrf_r | 112 | 436 | 575 | **439** | **571** | 450 | 557 | 56 | **218** | **574** | 219 | 573 | 218 | 575 |
| 526.blender_r | 112 | **279** | **611** | 279 | 611 | 280 | 610 | 112 | **279** | **611** | 279 | 611 | 280 | 610 |
| 527.cam4_r | 112 | **268** | **730** | 265 | 740 | 271 | 723 | 112 | 267 | 733 | **264** | **742** | 263 | 746 |
| 538.imagick_r | 112 | **125** | **2230** | 125 | 2240 | 125 | 2230 | 112 | **125** | **2230** | 125 | 2240 | 125 | 2230 |
| 544.nab_r | 112 | 156 | 1210 | 156 | 1210 | **156** | **1210** | 112 | 156 | 1210 | 156 | 1210 | **156** | **1210** |
| 549.fotonik3d_r | 112 | 789 | 553 | **789** | **553** | 789 | 553 | 112 | 789 | 553 | **789** | **553** | 789 | 553 |
| 554.roms_r | 112 | **560** | **318** | 560 | 318 | 562 | 317 | 56 | 267 | 333 | 265 | 336 | **265** | **335** |

**SPECrate®2017_fp_base = 713**

**SPECrate®2017_fp_peak = 734**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-111
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_2024/lib/intel64:/home/cpu2017_2024/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

**(Continued on next page)**

## General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)
LLC Prefetch Set to Disabled
LLC dead line alloc Set to Disabled
Stale AtoS Set to Disabled

Sysinfo program /home/cpu2017_2024/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu May 30 14:00:26 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
  2023 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
```

**(Continued on next page)**

## Platform Notes (Continued)

```
2. w
   14:00:26 up  6:58,  0 users,  load average: 23.97, 81.60, 100.29
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 2060185
  max locked memory           (kbytes, -l) 8192
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 2060185
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 sh 1.sh
 sh run_rate.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=56 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=56 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_2024

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) GOLD 5520+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000200
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 28
    siblings        : 56
    2 physical ids (chips)
    112 processors (hardware threads)
    physical id 0: core ids 0-27
    physical id 1: core ids 0-27
    physical id 0: apicids 0-55
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    physical id 1: apicids 128-183
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          112
  On-line CPU(s) list:             0-111
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      INTEL(R) XEON(R) GOLD 5520+
  BIOS Model name:                 INTEL(R) XEON(R) GOLD 5520+
  CPU family:                      6
  Model:                           207
  Thread(s) per core:              2
  Core(s) per socket:              28
  Socket(s):                       2
  Stepping:                        2
  BogoMIPS:                        4400.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                   vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                                   ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                   rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                                   avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                   cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd
                                   dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                                   gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                   rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                   serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                   amx_int8 flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       2.6 MiB (56 instances)
  L1i cache:                       1.8 MiB (56 instances)
  L2 cache:                        112 MiB (56 instances)
  L3 cache:                        105 MiB (2 instances)
  NUMA node(s):                    4
  NUMA node0 CPU(s):               0-13,56-69
  NUMA node1 CPU(s):               14-27,70-83
  NUMA node2 CPU(s):               28-41,84-97
  NUMA node3 CPU(s):               42-55,98-111
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  Vulnerability Spectre v2:         Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                    sequence
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     2.6M   12 Data            1    64        1             64
     L1i       32K     1.8M    8 Instruction     1    64        1             64
     L2         2M     112M   16 Unified         2  2048        1             64
     L3      52.5M     105M   15 Unified         3 57344        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-13,56-69
  node 0 size: 128075 MB
  node 0 free: 127050 MB
  node 1 cpus: 14-27,70-83
  node 1 size: 129017 MB
  node 1 free: 128118 MB
  node 2 cpus: 28-41,84-97
  node 2 size: 128978 MB
  node 2 free: 128134 MB
  node 3 cpus: 42-55,98-111
  node 3 size: 129012 MB
  node 3 free: 128159 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527446960 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 30 07:02

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-13.el9_2)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                  dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                  mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
                  sep5 sshd sssd sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  enabled-runtime  systemd-remount-fs
  disabled         canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                   chrony-wait console-getty cpupower debug-shell dnf-system-upgrade kvm_stat
                   man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
                   selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                   systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                   systemd-sysupdate-reboot

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt5)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
  root=UUID=e7cc1b7d-5946-4ed4-8306-b2d382dc5709
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=UUID=937c2e4e-930c-4489-9a6c-cd05c9a2c08a
  nohz_full=1-111

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    40
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
```

(Continued on next page)

## Platform Notes (Continued)

```
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.2 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
  system-release Red Hat Enterprise Linux release 9.2 (Plow)

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017_2024
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda5      xfs   690G  121G  570G  18% /

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Product:        5288 V7
    Product Family: Eagle Stream

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    6x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600, configured at 4800
    8x Samsung M321R4GA3PB0-CWMJH 32 GB 2 rank 5600, configured at 4800
    2x Samsung M321R4GA3PB0-CWMKH 32 GB 2 rank 5600, configured at 4800


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       INSYDE Corp.
   BIOS Version:      01.01.03.05
   BIOS Date:         04/12/2024
   BIOS Revision:     3.5
```

## Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

## Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

## Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

**(Continued on next page)**

## Peak Optimization Flags (Continued)

511.povray_r (continued):
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.0.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-30 02:00:26-0400.
Report generated on 2024-06-24 10:40:57 by CPU2017 PS formatter v6716.
Originally published on 2024-06-18.