



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

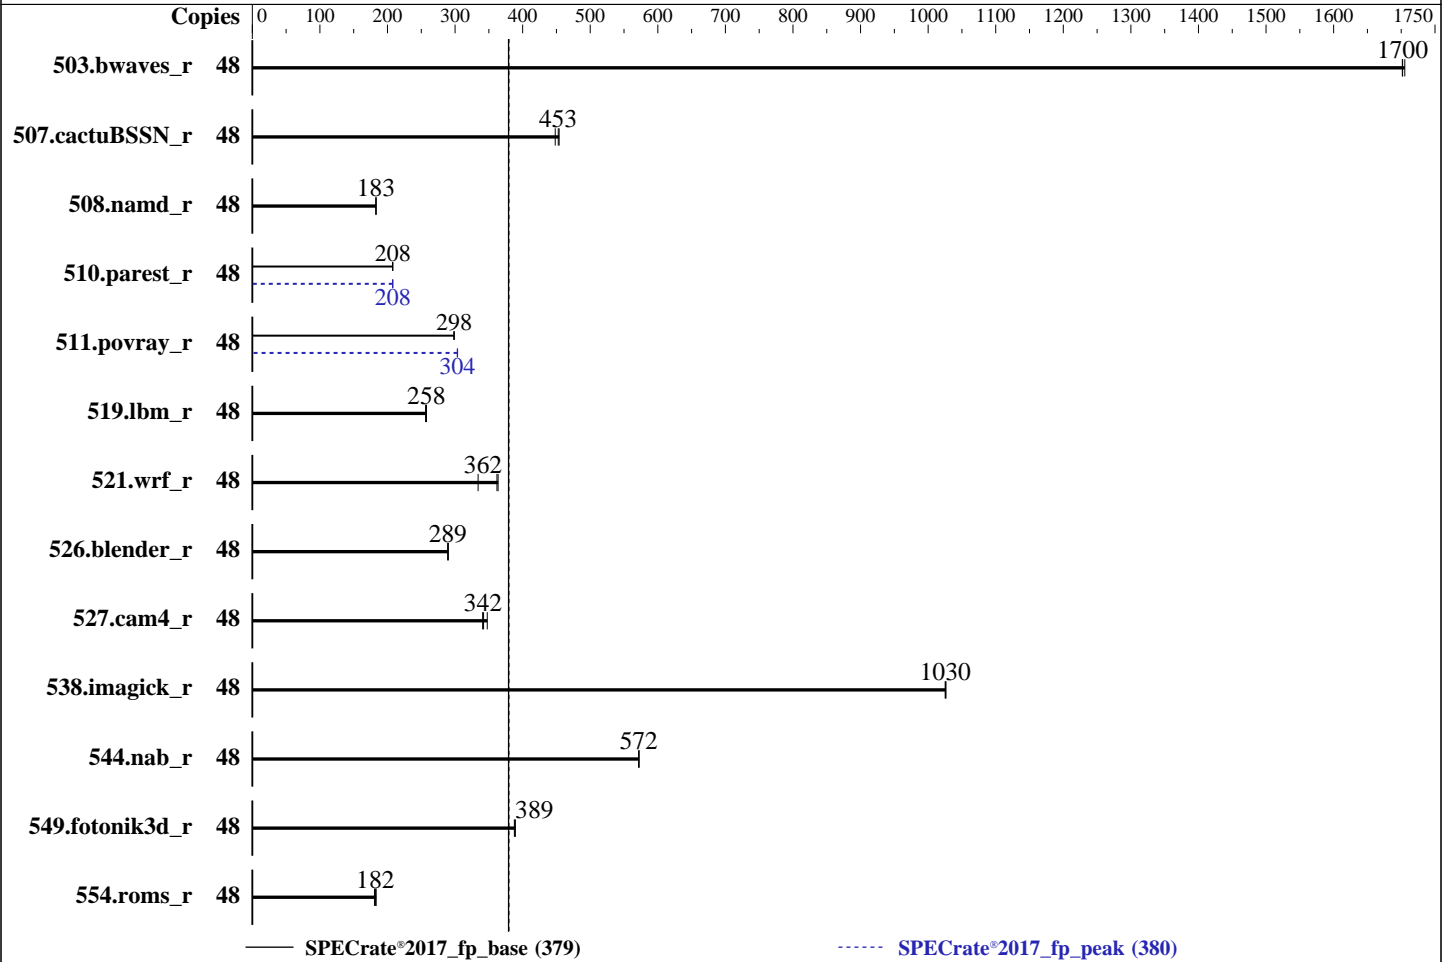

### Hardware

CPU Name: Intel Xeon Silver 4510  
 Max MHz: 4100  
 Nominal: 2400  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 4400)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 01.01.03.05 Released Apr-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: May-2024  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	282	1710	<u>283</u>	<u>1700</u>	283	1700	48	282	1710	<u>283</u>	<u>1700</u>	283	1700
507.cactuBSSN_r	48	136	448	<u>134</u>	<u>453</u>	134	454	48	136	448	<u>134</u>	<u>453</u>	134	454
508.namd_r	48	<u>249</u>	<u>183</u>	249	183	249	183	48	<u>249</u>	<u>183</u>	249	183	249	183
510.parest_r	48	<u>604</u>	<u>208</u>	605	208	604	208	48	<u>604</u>	<u>208</u>	605	208	604	208
511.povray_r	48	376	298	375	299	<u>376</u>	<u>298</u>	48	<u>369</u>	<u>304</u>	370	303	369	304
519.lbm_r	48	196	258	197	256	<u>196</u>	<u>258</u>	48	196	258	197	256	<u>196</u>	<u>258</u>
521.wrf_r	48	322	334	296	364	<u>297</u>	<u>362</u>	48	322	334	296	364	<u>297</u>	<u>362</u>
526.blender_r	48	252	290	<u>253</u>	<u>289</u>	253	289	48	252	290	<u>253</u>	<u>289</u>	253	289
527.cam4_r	48	241	348	246	341	<u>245</u>	<u>342</u>	48	241	348	246	341	<u>245</u>	<u>342</u>
538.imagick_r	48	<u>116</u>	<u>1030</u>	116	1030	116	1030	48	<u>116</u>	<u>1030</u>	116	1030	116	1030
544.nab_r	48	<u>141</u>	<u>572</u>	141	572	141	572	48	<u>141</u>	<u>572</u>	141	572	141	572
549.fotonik3d_r	48	482	388	<u>481</u>	<u>389</u>	481	389	48	482	388	<u>481</u>	<u>389</u>	481	389
554.roms_r	48	<u>419</u>	<u>182</u>	416	183	422	181	48	<u>419</u>	<u>182</u>	416	183	422	181

SPECrate®2017\_fp\_base = 379

SPECrate®2017\_fp\_peak = 380

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Uniautos/speccpu2017/lib/intel64:/home/Uniautos/speccpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)  
Enable LP [Global] Set to ALL LPs

Sysinfo program /home/Uniautos/speccpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Thu May 30 15:09:53 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9\_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.el9\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
15:09:53 up 18:28, 3 users, load average: 33.44, 45.32, 47.41  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 379

### FusionServer 1288H V7 (Intel Xeon Silver 4510)

## SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

root      tty1      Wed20    5:10m   1.26s   0.11s  -bash
root      pts/0      14:26   42:56   0.09s   0.09s  -bash
root      pts/2      11:33    5:28   0.10s   0.10s  -bash

```

#### 3. Username

From environment variable \$USER: root

#### 4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2060223
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2060223
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 48 -c ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg
--define smt-on --define cores=24 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 48 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.052/templogs/preenv.fprate.052.0.log --lognum 052.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/speccpu2017

```

#### 6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) SILVER 4510
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000590
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 12
siblings        : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0:  core ids 0-11
physical id 1:  core ids 0-11

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

physical id 0: apicids 0-23  
physical id 1: apicids 64-87  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) SILVER 4510
BIOS Model name:      INTEL(R) XEON(R) SILVER 4510
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):             2
Stepping:              8
BogoMIPS:              4800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             1.1 MiB (24 instances)
L1i cache:             768 KiB (24 instances)
L2 cache:              48 MiB (24 instances)
L3 cache:              60 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-5,24-29
NUMA node1 CPU(s):    6-11,30-35
NUMA node2 CPU(s):    12-17,36-41
NUMA node3 CPU(s):    18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 379

### FusionServer 1288H V7 (Intel Xeon Silver 4510)

## SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBS-eIBRS SW sequence  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 128039 MB
node 0 free: 113166 MB
node 1 cpus: 6-11,30-35
node 1 size: 129021 MB
node 1 free: 120663 MB
node 2 cpus: 12-17,36-41
node 2 size: 129021 MB
node 2 free: 121529 MB
node 3 cpus: 18-23,42-47
node 3 size: 129016 MB
node 3 free: 121519 MB
node distances:
node  0  1  2  3
0:  10 12 21 21
1:  12 10 21 21
2:  21 21 10 12
3:  21 21 12 10

```

9. /proc/meminfo

MemTotal: 527460832 kB

10. who -r

run-level 3 May 29 20:41

11. Systemd service manager version: systemd 252 (252-13.el9\_2)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD  ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                dbus-broker getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode
                nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

systemd-boot-update systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled blk-availability console-getty cpupower debug-shell dnf-system-upgrade firewallld kvm_stat
man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

```

20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)

```

```

21. Disk information
SPEC is set to: /home/Uniautos/speccpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.7T 178G 1.5T 11% /home

```

```

22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 1288H V7
Product Family: Eagle Stream
Serial: 00000000

```

```

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
2x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600, configured at 4400
14x Samsung M321R4GA3PB0-CWMXH 32 GB 2 rank 5600, configured at 4400

```

```

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.01.03.05
BIOS Date: 04/12/2024
BIOS Revision: 3.5

```

### Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Compiler Version Notes (Continued)

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: May-2024  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 379

FusionServer 1288H V7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 380

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** May-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-gopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -gopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_fp\_base = 379**

**FusionServer 1288H V7 (Intel Xeon Silver 4510)**

**SPECrate®2017\_fp\_peak = 380**

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** May-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-05-30 03:09:52-0400.

Report generated on 2024-07-03 09:23:08 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-02.