



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion


SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

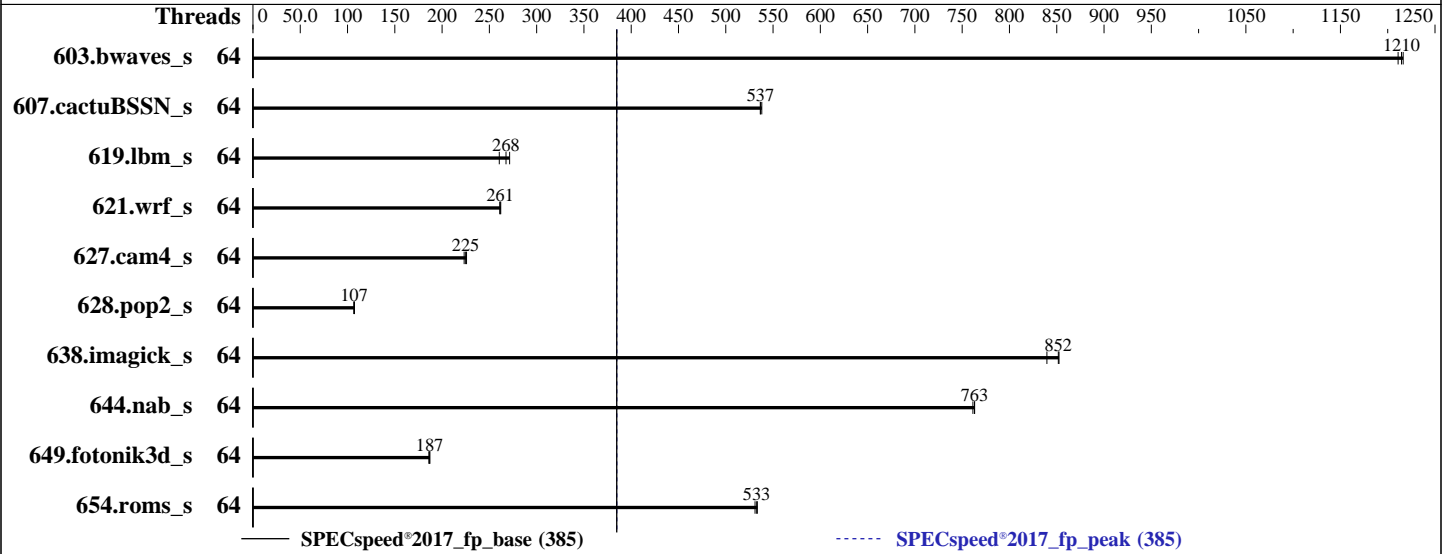

Hardware

CPU Name: Intel Xeon Gold 6558Q
 Max MHz: 4100
 Nominal: 3200
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)
 Storage: 1 x 1.92 TB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 01.01.03.05 Released Apr-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECSpeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECSpeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	48.6	1210	48.7	1210	48.5	1220	64	48.6	1210	48.7	1210	48.5	1220
607.cactuBSSN_s	64	31.1	537	31.1	537	31.0	538	64	31.1	537	31.1	537	31.0	538
619.lbm_s	64	19.3	271	20.1	260	19.6	268	64	19.3	271	20.1	260	19.6	268
621.wrf_s	64	50.6	261	50.7	261	50.5	262	64	50.6	261	50.7	261	50.5	262
627.cam4_s	64	39.2	226	39.7	223	39.4	225	64	39.2	226	39.7	223	39.4	225
628.pop2_s	64	111	107	111	107	111	107	64	111	107	111	107	111	107
638.imagick_s	64	16.9	852	17.2	840	16.9	852	64	16.9	852	17.2	840	16.9	852
644.nab_s	64	22.9	763	22.9	761	22.9	763	64	22.9	763	22.9	761	22.9	763
649.fotonik3d_s	64	49.0	186	48.8	187	48.7	187	64	49.0	186	48.8	187	48.7	187
654.roms_s	64	29.5	533	29.6	533	29.7	531	64	29.5	533	29.6	533	29.7	531

SPECSpeed®2017_fp_base = **385**

SPECSpeed®2017_fp_peak = **385**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/Uniautos/speccpu2017/lib/intel64:/home/Uniautos/speccpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Platform Notes

BIOS configuration:
Performance Profile Set to Load Balance
Enable LP [Global] Set to Single LP
ADDDC Sparing Set to Disabled

Sysinfo program /home/Uniautos/speccpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Jul 3 15:35:12 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:35:12 up 5:06, 1 user, load average: 5.91, 5.02, 3.04
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root     tty1      19:02   2:17   0.08s  0.08s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Platform Notes (Continued)

```

scheduling priority          (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 2060211
max locked memory           (kbytes, -l) 8192
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 2060211
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sh speed.sh
runcpu --define default-platform-flags -c ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=64
--tune base,peak -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg
--define cores=64 --tune base,peak --output_format all --define drop_caches --nopower --runmode speed
--tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/speccpu2017

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6558Q
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 32
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Platform Notes (Continued)

```

On-line CPU(s) list:          0-63
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   INTEL(R) XEON(R) GOLD 6558Q
BIOS Model name:             INTEL(R) XEON(R) GOLD 6558Q
CPU family:                   6
Model:                        207
Thread(s) per core:          1
Core(s) per socket:          32
Socket(s):                    2
Stepping:                     2
Frequency boost:              enabled
CPU max MHz:                  3201.0000
CPU min MHz:                  800.0000
BogoMIPS:                     6400.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
                                avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke
                                waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                                avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:               VT-x
L1d cache:                    3 MiB (64 instances)
L1i cache:                    2 MiB (64 instances)
L2 cache:                     128 MiB (64 instances)
L3 cache:                     120 MiB (2 instances)
NUMA node(s):                 2
NUMA node0 CPU(s):            0-31
NUMA node1 CPU(s):            32-63
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                                sequence
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d   48K      3M      12 Data          1    64      1             64
L1i   32K      2M       8 Instruction    1    64      1             64
L2    2M      128M     16 Unified       2  2048     1             64
L3    60M     120M     15 Unified       3 65536     1             64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 257059 MB
node 0 free: 250540 MB
node 1 cpus: 32-63
node 1 size: 258035 MB
node 1 free: 247731 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10
```

9. /proc/meminfo

```
MemTotal:      527457640 kB
```

10. who -r

```
run-level 3 Jul 3 18:29
```

11. Systemd service manager version: systemd 252 (252-13.el9_2)

```
Default Target Status
multi-user      degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time
```

13. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd
systemd-boot-update systemd-network-generator tuned udisks2

enabled-runtime systemd-remount-fs
disabled       blk-availability console-getty cpupower debug-shell dnf-system-upgrade firewalld kvm_stat
man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
systemd-pstore systemd-sysex
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot
```

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

15. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Platform Notes (Continued)

analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.20 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

18. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

20. OS release

From /etc/*-release /etc/*-version	
os-release	Red Hat Enterprise Linux 9.2 (Plow)
redhat-release	Red Hat Enterprise Linux release 9.2 (Plow)
system-release	Red Hat Enterprise Linux release 9.2 (Plow)

21. Disk information

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Platform Notes (Continued)

SPEC is set to: /home/Uniautos/speccpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.7T 242G 1.5T 15% /home

22. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 2288H V7
Product Family: Eagle Stream
Serial: 2106182101X3N8000001

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
2x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600, configured at 5200
14x Samsung M321R4GA3PB0-CWMXH 32 GB 2 rank 5600, configured at 5200

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.01.03.05
BIOS Date: 04/12/2024
BIOS Revision: 3.5

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_fp_base = 385

FusionServer 2288H V7 (Intel Xeon Gold 6558Q)

SPECspeed®2017_fp_peak = 385

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-03 03:35:12-0400.
Report generated on 2024-07-30 19:35:33 by CPU2017 PDF formatter v6716.
Originally published on 2024-07-30.