



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro


Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jul-2024  
Hardware Availability: Sep-2024  
Software Availability: Jun-2024

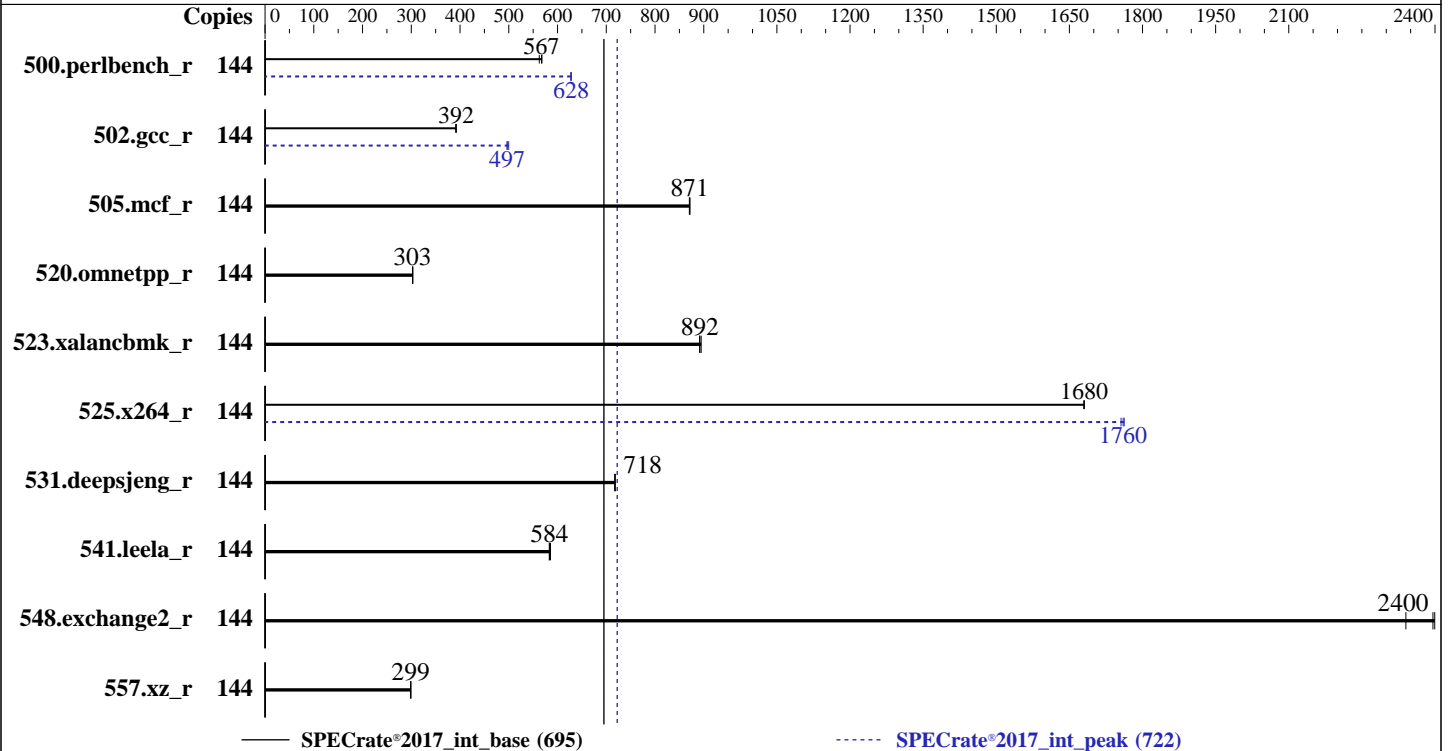

### Hardware

CPU Name: Intel Xeon 6780E  
Max MHz: 3000  
Nominal: 2200  
Enabled: 144 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 4 MB I+D on chip per core  
L3: 108 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 1 x 900 GB M.2 NVMe SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Version 1.0a released Jul-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jul-2024  
Hardware Availability: Sep-2024  
Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	<b>404</b>	<b>567</b>	408	563	404	568	144	365	628	<b>365</b>	<b>628</b>	365	628
502.gcc_r	144	<b>520</b>	<b>392</b>	521	391	520	392	144	<b>410</b>	<b>497</b>	408	500	411	496
505.mcf_r	144	<b>267</b>	<b>871</b>	267	872	267	870	144	<b>267</b>	<b>871</b>	267	872	267	870
520.omnetpp_r	144	<b>624</b>	<b>303</b>	623	303	625	303	144	<b>624</b>	<b>303</b>	623	303	625	303
523.xalancbmk_r	144	171	891	<b>170</b>	<b>892</b>	170	895	144	171	891	<b>170</b>	<b>892</b>	170	895
525.x264_r	144	150	1680	<b>150</b>	<b>1680</b>	150	1680	144	144	1760	<b>143</b>	<b>1760</b>	143	1760
531.deepsjeng_r	144	230	718	<b>230</b>	<b>718</b>	230	718	144	230	718	<b>230</b>	<b>718</b>	230	718
541.leela_r	144	407	586	<b>409</b>	<b>584</b>	409	583	144	407	586	<b>409</b>	<b>584</b>	409	583
548.exchange2_r	144	<b>157</b>	<b>2400</b>	161	2340	157	2400	144	<b>157</b>	<b>2400</b>	161	2340	157	2400
557.xz_r	144	520	299	<b>520</b>	<b>299</b>	521	299	144	520	299	<b>520</b>	<b>299</b>	521	299

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

### General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

**BIOS Settings:**

Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance  
DCU Streamer Prefetcher = Disable  
LLC Dead Line Alloc = Disable  
KTI Prefetch = Enable  
Stale AtoS = Disable  
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on 135-173-19 Mon Jul 22 09:44:24 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux 135-173-19 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
09:44:24 up 2 min, 1 user, load average: 0.03, 0.05, 0.02  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 09:42 8.00s 1.35s 0.01s -bash

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2061352
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2061352
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
--define no-numa --reportable --tune base,peak -o all --define drop_caches intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
--define no-numa --reportable --tune base,peak --output_format all --define drop_caches --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6780E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x30001b3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 144
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-143
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        52 bits physical, 48 bits virtual
Byte Order:           Little Endian
CPU(s):               144
On-line CPU(s) list: 0-143
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
Model name:           Intel(R) Xeon(R) 6780E
BIOS Model name:     Intel(R) Xeon(R) 6780E  CPU @ 2.2GHz
BIOS CPU family:     179
CPU family:          6
Model:                175
Thread(s) per core:  1
Core(s) per socket:  144
Socket(s):            1
Stepping:             3
CPU(s) scaling MHz:  34%
CPU max MHz:          3000.0000
CPU min MHz:          800.0000
BogoMIPS:             4400.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                    pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                    nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                    pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                    xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                    tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                    3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                    ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                    vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                    rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
                    pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vmmi umip pku ospke
                    waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote
                    movdiri movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt
                    flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:            4.5 MiB (144 instances)
L1i cache:            9 MiB (144 instances)
L2 cache:             144 MiB (36 instances)
L3 cache:             108 MiB (1 instance)
NUMA node(s):        1
NUMA node0 CPU(s):  0-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

Vulnerability Spec rstack overflow: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4.5M	8	Data	1	64	1	64
L1i	64K	9M	8	Instruction	1	128	1	64
L2	4M	144M	16	Unified	2	4096	1	64
L3	108M	108M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
 available: 1 nodes (0)  
 node 0 cpus: 0-143  
 node 0 size: 515364 MB  
 node 0 free: 514012 MB  
 node distances:  
 node 0  
 0: 10

9. /proc/meminfo

MemTotal: 527733176 kB

10. who -r

run-level 3 Jul 22 09:41

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=db0a9820-2adc-425f-b19e-e87fb952ebcf

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 4:
  current policy: frequency should be within 800 MHz and 3.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
    Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 xfs 892G 27G 865G 3% /  
-----

21. /sys/devices/virtual/dmi/id  
Vendor: Supermicro  
Product: Super Server  
Product Family: Family  
Serial: 0123456789  
-----

22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x Micron Technology MTC40F2046S1RC64BDY MWCC 64 GB 2 rank 6400  
-----

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.0a  
BIOS Date: 07/09/2024  
BIOS Revision: 5.35  
-----

### Compiler Version Notes

-----  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

-----  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

-----  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

### Compiler Version Notes (Continued)

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jul-2024  
**Hardware Availability:** Sep-2024  
**Software Availability:** Jun-2024

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revH.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

Hyper SuperServer SYS-212H-TN  
(X14SBH , Intel Xeon 6780E)

SPECrate®2017\_int\_base = 695

SPECrate®2017\_int\_peak = 722

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Jul-2024

**Hardware Availability:** Sep-2024

**Software Availability:** Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-21 21:44:24-0400.

Report generated on 2024-08-14 14:01:03 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-13.