



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 603

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

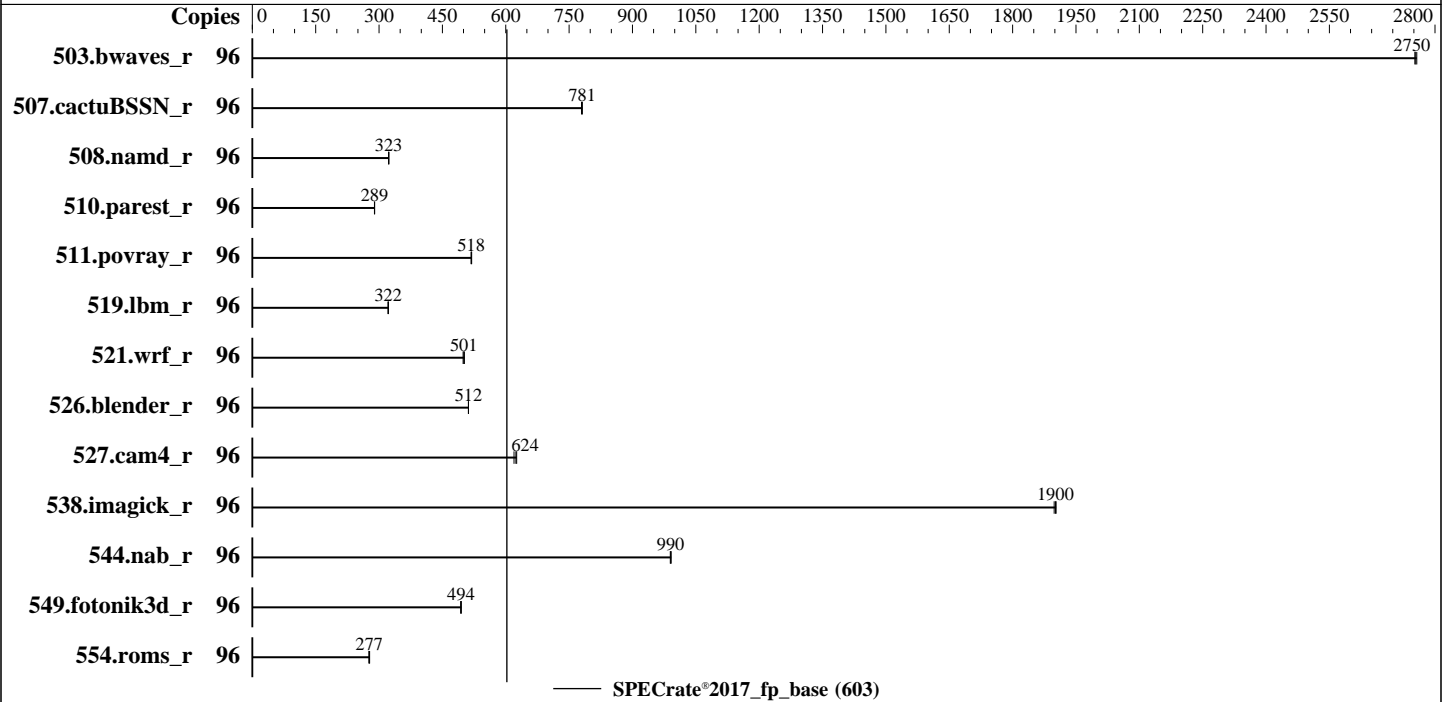

Hardware

CPU Name: Intel Xeon Silver 4516Y+
 Max MHz: 3700
 Nominal: 2200
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)
 Storage: 1 x 6.4 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 6.10.38P60 released Apr-2024 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 603
SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	349	2760	<u>350</u>	<u>2750</u>	350	2750							
507.cactuBSSN_r	96	156	781	156	779	<u>156</u>	<u>781</u>							
508.namd_r	96	282	323	<u>282</u>	<u>323</u>	282	323							
510.parest_r	96	867	290	869	289	<u>868</u>	<u>289</u>							
511.povray_r	96	432	519	433	518	<u>432</u>	<u>518</u>							
519.lbm_r	96	315	322	<u>314</u>	<u>322</u>	314	322							
521.wrf_r	96	<u>429</u>	<u>501</u>	428	502	431	499							
526.blender_r	96	286	512	<u>286</u>	<u>512</u>	286	512							
527.cam4_r	96	271	620	268	626	<u>269</u>	<u>624</u>							
538.imagick_r	96	126	1900	125	1900	<u>126</u>	<u>1900</u>							
544.nab_r	96	<u>163</u>	<u>990</u>	163	992	163	990							
549.fotonik3d_r	96	756	495	758	493	<u>757</u>	<u>494</u>							
554.roms_r	96	549	278	<u>551</u>	<u>277</u>	553	276							

SPECrate®2017_fp_base = 603

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 603

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

SNC = Enable SNC2 (2-clusters)

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Performance

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Mon Jul 29 08:41:43 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 252 (252-13.e19_2)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. tuned-adm active
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
08:41:43 up 8:24, 3 users, load average: 63.27, 87.80, 92.54

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	00:18	3:00m	1.36s	0.01s	sh intrate.sh
root	pts/0	01:22	3:00m	6.23s	0.00s	sh 4516Y+.sh

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 603

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```
root pts/1 03:38 3:01m 0.05s 0.05s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126555
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126555
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
sh intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) SILVER 4516Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 603

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             INTEL(R) XEON(R) SILVER 4516Y+
BIOS Model name:       INTEL(R) XEON(R) SILVER 4516Y+
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:               2
CPU max MHz:           3700.0000
CPU min MHz:           800.0000
BogoMIPS:               4400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                        hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
                        flush_lld arch_capabilities
Virtualization:         VT-x
L1d cache:              2.3 MiB (48 instances)
L1i cache:              1.5 MiB (48 instances)
L2 cache:               96 MiB (48 instances)
L3 cache:               90 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-11,48-59
NUMA node1 CPU(s):     12-23,60-71
NUMA node2 CPU(s):     24-35,72-83
NUMA node3 CPU(s):     36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 603

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 257578 MB
node 0 free: 247799 MB
node 1 cpus: 12-23,60-71
node 1 size: 258042 MB
node 1 free: 250375 MB
node 2 cpus: 24-35,72-83
node 2 size: 258042 MB
node 2 free: 250524 MB
node 3 cpus: 36-47,84-95
node 3 size: 258037 MB
node 3 free: 250584 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1056462348 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 252 (252-13.e19_2)

```
Default Target Status
multi-user      starting
```

11. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewallld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlgger
power-profiles-daemon qemu-guest-agent rshmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update
systemd-network-generator tuned udisks2 upower vgauthd vmttoolsd
enabled-runtime systemd-remount-fs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 603

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Platform Notes (Continued)

```

disabled      arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
               canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
               dbus-daemon debug-shell dnf-system-upgrade dnsmasq fancontrol fcoe grafana-server gssproxy
               httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiui0 kpatch kvm_stat ledmon
               lldpad man-db-restart-cache-update nfs-blkmap nfs-server nftables nmb nvme-autoconnect
               ostree-readonly-sysroot-migration pesign pmfind pmie_farm pmlogger_farm pmproxy podman
               podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop
               psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd
               selinux-check-proper-disable serial-getty@ smb snmpd snmptrapd speech-dispatcherd
               srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
               systemd-sysexec target targetclid tog-pegasus trace-cmd vsftpd wpa_supplicant

indirect      pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
               systemd-sysupdate systemd-sysupdate-reboot vsftpd@

```

```

-----
12. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
    root=/dev/mapper/rhel-root
    ro
    resume=/dev/mapper/rhel-swap
    rd.lvm.lv=rhel/root
    rd.lvm.lv=rhel/swap
    rhgb
    quiet
    nohz_full=1-143
    rcu_nocbs=1-143
    console=tty0

```

```

-----
13. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 3.70 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes

```

```

-----
14. tuned-adm active
    Current active profile: throughput-performance

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 603

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Date: Jul-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2024

Platform Notes (Continued)

```

vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.2 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.2 (Plow)
system-release  Red Hat Enterprise Linux release 9.2 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /home/speccpu
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs       5.8T     139G  5.7T   3% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          New H3C Technologies Co., Ltd.
Product:         H3C UniServer R4700 G6
Product Family:  Rack
Serial:          210235A1Q74700060002

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Hynix HMC94AGBRA179N 64 GB 2 rank 5600, configured at 4400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     6.10.38P60
BIOS Date:        04/03/2024
BIOS Revision:    5.32

```




SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 603

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Compiler Version Notes

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.
H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 603

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024
Hardware Availability: Oct-2023
Software Availability: Mar-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Silver 4516Y+)

SPECrate®2017_fp_base = 603

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2024

Hardware Availability: Oct-2023

Software Availability: Mar-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-29 08:41:43-0400.

Report generated on 2024-08-29 10:49:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-27.