



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%60

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066


Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

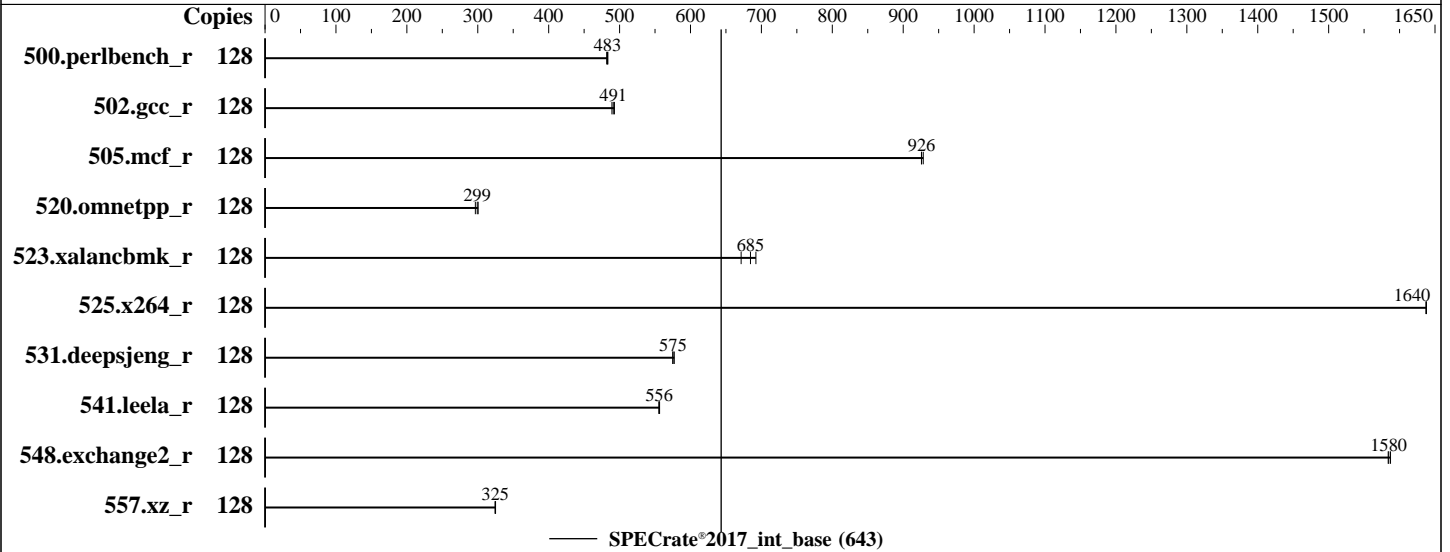

Hardware

CPU Name: AMD EPYC 9534
 Max MHz: 3700
 Nominal: 2450
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 x 960GB SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux release 9.3 (Plow) kernel version 5.14.0-362.8.1.el9_3.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 5.27 released Jul-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%60

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	421	483	<u>422</u>	<u>483</u>	423	482							
502.gcc_r	128	<u>369</u>	<u>491</u>	370	489	368	493							
505.mcf_r	128	223	926	<u>223</u>	<u>926</u>	223	928							
520.omnetpp_r	128	566	297	<u>561</u>	<u>299</u>	559	301							
523.xalancbmk_r	128	<u>197</u>	<u>685</u>	201	671	195	692							
525.x264_r	128	137	1640	<u>137</u>	<u>1640</u>	137	1640							
531.deepsjeng_r	128	<u>255</u>	<u>575</u>	255	575	254	577							
541.leela_r	128	381	556	<u>381</u>	<u>556</u>	382	555							
548.exchange2_r	128	211	1590	212	1580	<u>212</u>	<u>1580</u>							
557.xz_r	128	<u>426</u>	<u>325</u>	425	325	426	324							

SPECrate®2017_int_base = 643

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%₀₀

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu119/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu119/amd_rate_aocc400_znver4_A_lib/lib32:/usr/
local/amd/aocc-compiler-4.2.0/lib:/usr/local/amd/aocc-compiler-4.2.0/lib32:/usr/local/python312/lib:/o
pt/AMDuProf_4.2-850/lib"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

cTDP Control: Manual

cTDP: 400

PPT Control: Manual

PPT: 400

Determinism Slider set to Power

NUMA nodes per socket: NPS4

IOMMU: Auto

SVM Mode: Disabled

Sysinfo program /home/cpu119/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Mon Aug 21 20:01:28 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.el9)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%o

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Jul-2024

Software Availability: Nov-2023

Platform Notes (Continued)

- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-362.8.1.el9_3.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Oct 3 11:12:36 EDT 2023
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:01:28 up 1 min, 1 user, load average: 0.15, 0.09, 0.03
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      tty1    20:01   8.00s  1.10s  0.02s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3092556
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1000000
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3092650
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.009/temlogs/preenv.intrate.009.0.log --lognum 009.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpul19
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%o

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

Platform Notes (Continued)

```

6. /proc/cpuinfo
model name      : AMD EPYC 9534 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101144
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 64
siblings      : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9534 64-Core Processor
BIOS Model name:      AMD EPYC 9534 64-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             1
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3718.0659
CPU min MHz:           1500.0000
BogoMIPS:              4892.67
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                      lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                      aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
                      movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                      cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                      topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                      cdp_l3 invpcid_single hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                      ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm
                      rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                      avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16 clzero
                      irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                      pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                      avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                      avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca
                      fsrm flush_l1d

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%₀₀

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

Platform Notes (Continued)

```

Virtualization:          AMD-V
L1d cache:              2 MiB (64 instances)
L1i cache:              2 MiB (64 instances)
L2 cache:               64 MiB (64 instances)
L3 cache:               256 MiB (8 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-15,64-79
NUMA node1 CPU(s):     16-31,80-95
NUMA node2 CPU(s):     32-47,96-111
NUMA node3 CPU(s):     48-63,112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec store bypass:  Vulnerable
Vulnerability Spectre v1:         Vulnerable: __user pointer sanitization and usercopy barriers only; no
swapgs barriers
Vulnerability Spectre v2:         Vulnerable, IBPB: disabled, STIBP: disabled, PBRSE-eIBRS: Not affected
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:    Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 192713 MB
node 0 free: 192029 MB
node 1 cpus: 16-31,80-95
node 1 size: 193474 MB
node 1 free: 189852 MB
node 2 cpus: 32-47,96-111
node 2 size: 193527 MB
node 2 free: 192425 MB
node 3 cpus: 48-63,112-127
node 3 size: 193483 MB
node 3 free: 192600 MB
node distances:
node  0  1  2  3
0:  10  12  12  12
1:  12  10  12  12
2:  12  12  10  12
3:  12  12  12  10

```

9. /proc/meminfo

MemTotal: 791757132 kB

10. who -r

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i1/4^AMD EPYC 9534i1/4%00

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

Platform Notes (Continued)

run-level 3 Aug 21 20:00

11. Systemd service manager version: systemd 252 (252-18.el9)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION
* mdmonitor.service loaded failed failed Software RAID monitoring and management

13. Services, from systemctl list-unit-files

STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned
libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode
multipathd nis-domainname nvme-fc-boot-connections ostree-remount power-profiles-daemon
qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd
switcheroo-control sysstat systemd-boot-update systemd-network-generator udisks2 upower
vgauthd vmtoolsd
enabled-runtime rc-local systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq fancontrol firewalld hwloc-dump-hwdata
iprdump iprinit iprupdate iscsi iscsiuiio kpatch kvm_stat ledmon
man-db-restart-cache-update netavark-dhcp-proxy netserver nftables nvme-autoconnect
ostree-readonly-sysroot-migration pesign podman podman-auto-update podman-clean-transient
podman-kube@ podman-restart powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm
rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd
sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext tuned
wpa_supplicant
indirect spice-vmagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.8.1.el9_3.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
default_hugepagesz=1G
iommu=pt
mitigations=off
idel=nomwait
processor.limit_cstate=0
nmi_watchdog=0

15. cpupower frequency-info

analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.45 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%00

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

Platform Notes (Continued)

Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2450MHz

16. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

17. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	40
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

18. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	50000

20. OS release

From /etc/*-release /etc/*-version	
os-release	Red Hat Enterprise Linux 9.3 (Plow)
redhat-release	Red Hat Enterprise Linux release 9.3 (Plow)
system-release	Red Hat Enterprise Linux release 9.3 (Plow)

21. Disk information

SPEC is set to: /home/cpu119

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%₀₀

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024
Hardware Availability: Jul-2024
Software Availability: Nov-2023

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	48G	772G	6%	/home

```

22. /sys/devices/virtual/dmi/id
Vendor:      AMD Corporation
Product:     Quartz
  
```

```

23. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  12x Samsung M321R8GA0PB0-CWMMKH 64 GB 2 rank 5600, configured at 4800
  
```

```

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     5.27
BIOS Date:        07/10/2024
BIOS Revision:    5.27
  
```

Compiler Version Notes

```

=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====
  
```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====
  
```

```

=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====
  
```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====
  
```

```

=====
Fortran   | 548.exchange2_r(base)
=====
  
```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====
  
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%₆₀

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Jul-2024

Software Availability: Nov-2023

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdallic

```

C++ benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 643

H3C UniServer R3950 G6 i¹/₄^AMD EPYC 9534i¹/₄%o

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Aug-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Jul-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Nov-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.4-Genoa.html

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.4-Genoa.xml

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-21 20:01:28-0400.

Report generated on 2024-09-11 09:39:44 by CPU2017 PDF formatter v6716.

Originally published on 2024-09-10.