



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865


Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

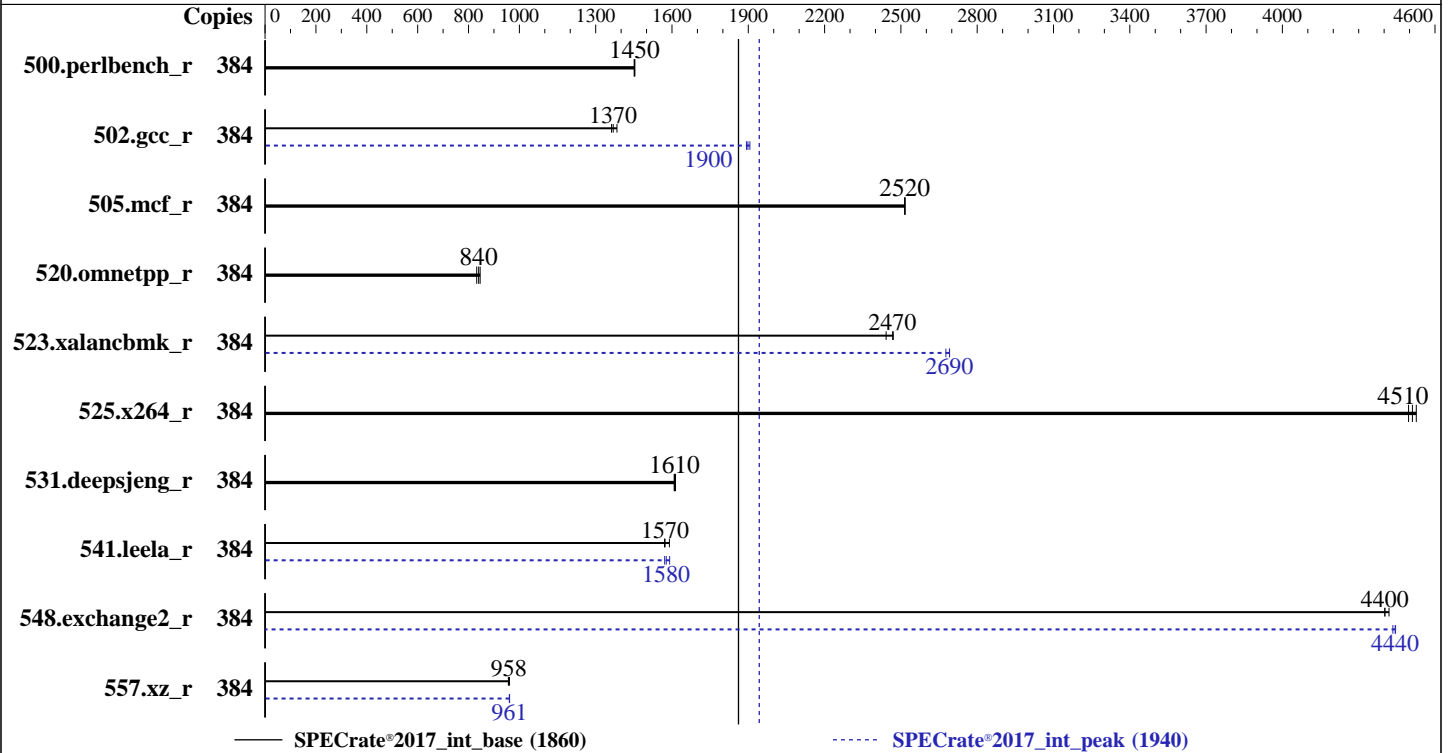

### Hardware

CPU Name: AMD EPYC 9684X  
 Max MHz: 3700  
 Nominal: 2550  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 1152 MB I+D on chip per chip,  
 96 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 04.02.32 released May-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	421	1450	<b><u>421</u></b>	<b><u>1450</u></b>	420	1450	384	421	1450	<b><u>421</u></b>	<b><u>1450</u></b>	420	1450
502.gcc_r	384	<b><u>397</u></b>	<b><u>1370</u></b>	393	1380	399	1360	384	<b><u>286</u></b>	<b><u>1900</u></b>	287	1890	285	1910
505.mcf_r	384	<b><u>247</u></b>	<b><u>2520</u></b>	247	2520	247	2520	384	<b><u>247</u></b>	<b><u>2520</u></b>	247	2520	247	2520
520.omnetpp_r	384	<b><u>600</u></b>	<b><u>840</u></b>	605	832	596	846	384	<b><u>600</u></b>	<b><u>840</u></b>	605	832	596	846
523.xalancbmk_r	384	<b><u>164</u></b>	<b><u>2470</u></b>	166	2440	164	2470	384	<b><u>151</u></b>	<b><u>2690</u></b>	151	2680	151	2690
525.x264_r	384	<b><u>149</u></b>	<b><u>4510</u></b>	149	4530	150	4500	384	<b><u>149</u></b>	<b><u>4510</u></b>	149	4530	150	4500
531.deepsjeng_r	384	<b><u>273</u></b>	<b><u>1610</u></b>	273	1610	274	1610	384	<b><u>273</u></b>	<b><u>1610</u></b>	273	1610	274	1610
541.leela_r	384	405	1570	<b><u>404</u></b>	<b><u>1570</u></b>	400	1590	384	<b><u>403</u></b>	<b><u>1580</u></b>	400	1590	405	1570
548.exchange2_r	384	228	4420	229	4400	<b><u>229</u></b>	<b><u>4400</u></b>	384	<b><u>226</u></b>	<b><u>4440</u></b>	226	4440	227	4430
557.xz_r	384	432	961	433	957	<b><u>433</u></b>	<b><u>958</u></b>	384	<b><u>431</u></b>	<b><u>961</u></b>	431	961	432	960

SPECrate®2017\_int\_base = **1860**

SPECrate®2017\_int\_peak = **1940**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Kaytus Systems Pte. Ltd.**

SPECrate®2017\_int\_base = 1860

**KR1280V2 (AMD EPYC 9684X)**

SPECrate®2017\_int\_peak = 1940

**CPU2017 License:** 6865

**Test Date:** Aug-2024

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Hardware Availability:** Jun-2023

**Tested by:** Kaytus Systems Pte. Ltd.

**Software Availability:** Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/CPU2017/amd_rate_aocc400_znver4_A_lib/lib:/home/CPU2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOCONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOCONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

```
SVM Mode = disable
DRAM Scrub time = disable
NUMA nodes per socket = NPS4
Determinism Slider = Power
cTDP = 400
Package Power Limit = 400
```

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Aug 28 20:15:36 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:15:36 up 21 min, 1 user, load average: 0.33, 0.16, 0.50
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     -             20:15   24.00s  1.47s  0.26s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6190762
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190762
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9684X 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

model          : 17
stepping       : 2
microcode      : 0xa101244
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 96
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9684X 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             2
Stepping:              2
Frequency boost:      enabled
CPU max MHz:          3715.4290
CPU min MHz:          1500.0000
BogoMIPS:              5091.99
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                      pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                      abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                      perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                      invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                      avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                      avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                      svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                      pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                      umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:        AMD-V
L1d cache:             6 MiB (192 instances)
L1i cache:             6 MiB (192 instances)
L2 cache:              192 MiB (192 instances)
L3 cache:              2.3 GiB (24 instances)
NUMA node(s):         8

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

### Platform Notes (Continued)

```

NUMA node0 CPU(s):      0-23,192-215
NUMA node1 CPU(s):      24-47,216-239
NUMA node2 CPU(s):      48-71,240-263
NUMA node3 CPU(s):      72-95,264-287
NUMA node4 CPU(s):      96-119,288-311
NUMA node5 CPU(s):      120-143,312-335
NUMA node6 CPU(s):      144-167,336-359
NUMA node7 CPU(s):      168-191,360-383
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                          filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	96M	2.3G	16	Unified	3	98304	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-23,192-215
node 0 size: 193212 MB
node 0 free: 190667 MB
node 1 cpus: 24-47,216-239
node 1 size: 193523 MB
node 1 free: 192401 MB
node 2 cpus: 48-71,240-263
node 2 size: 193523 MB
node 2 free: 192966 MB
node 3 cpus: 72-95,264-287
node 3 size: 193523 MB
node 3 free: 193086 MB
node 4 cpus: 96-119,288-311
node 4 size: 193523 MB
node 4 free: 193065 MB
node 5 cpus: 120-143,312-335
node 5 size: 193523 MB
node 5 free: 193020 MB
node 6 cpus: 144-167,336-359
node 6 size: 193489 MB
node 6 free: 192891 MB
node 7 cpus: 168-191,360-383
node 7 size: 193393 MB
node 7 free: 192928 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584859836 kB

```

```

-----
10. who -r
    run-level 3 Aug 28 19:54

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled         getty@
    enabled-runtime systemd-remount-fs
    disabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd autofsd autoyast-initscripts
                    blk-availability boot-sysctl ca-certificates chronyd console-getty cron cups
                    cups-browsed debug-shell display-manager ebttables exchange-bmc-os-info firewallld gpm
                    grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievd irqbalance
                    issue-add-ssh-keys issue-generator kbdsettings kexec-load klog lunmask lvm2-monitor
                    man-db-create multipathd nfs nfs-blkmap nsd nvme-fc-boot-connections nvme-fc-autoconnect
                    postfix purge-kernels rdisc rollback rpcbind rpmconfigcheck rsyncd rsyslog serial-getty@
                    smartd smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
                    systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                    wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
    generated       jexec
    indirect        wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=23fac4c3-67a0-43a3-b5eb-2787b6b441ca
    splash=silent
    resume=/dev/disk/by-uuid/5e1ca509-5afc-4c24-bca2-34d66622ea63
    mitigations=auto
    quiet
    security=apparmor

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
      current policy: frequency should be within 1.50 GHz and 2.55 GHz.
                       The governor "performance" may decide which speed to use
                       within this range.
    boost state support:
      Supported: yes
      Active: yes

```

```

-----
15. tuned-adm active
    It seems that tuned daemon is not running, preset profile is not activated.
    Preset profile: latency-performance

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

**CPU2017 License:** 6865

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Aug-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
-----

17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----

20. Disk information
SPEC is set to: /home/CPU2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs   381G  65G  316G  17% /home
-----

21. /sys/devices/virtual/dmi/id
Vendor:      KAYTUS
Product:     KR1280-E2-A0-R0-00
Product Family: Not specified
Serial:      000000000
-----

22. dmidecode

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

## KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

- 3x Hynix HMC94MEBRA109N 64 GB 2 rank 4800
- 6x Samsung M329R8GA0BB0-CQKDG 64 GB 2 rank 4800
- 10x Samsung M329R8GA0BB0-CQKEG 64 GB 2 rank 4800
- 5x Samsung M329R8GA0BB0-CQKVG 64 GB 2 rank 4800

#### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

- BIOS Vendor: American Megatrends International, LLC.
- BIOS Version: 04.02.32
- BIOS Date: 05/14/2024

### Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
 Target: i386-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
 Target: i386-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Kaytus Systems Pte. Ltd.**

SPECrate®2017\_int\_base = 1860

**KR1280V2 (AMD EPYC 9684X)**

SPECrate®2017\_int\_peak = 1940

**CPU2017 License:** 6865

**Test Date:** Aug-2024

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Hardware Availability:** Jun-2023

**Tested by:** Kaytus Systems Pte. Ltd.

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

```

C++ benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext

```

Fortran benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Peak Portability Flags (Continued)

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

502.gcc\_r: -m32 -flto -z muldefs -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

557.xz\_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM  
-ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

CPU2017 License: 6865

Test Date: Aug-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Jun-2023

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_int\_base = 1860

KR1280V2 (AMD EPYC 9684X)

SPECrate®2017\_int\_peak = 1940

**CPU2017 License:** 6865

**Test Date:** Aug-2024

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Hardware Availability:** Jun-2023

**Tested by:** Kaytus Systems Pte. Ltd.

**Software Availability:** Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-28 20:15:36-0400.

Report generated on 2024-11-06 12:20:29 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-05.