



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Sep-2024

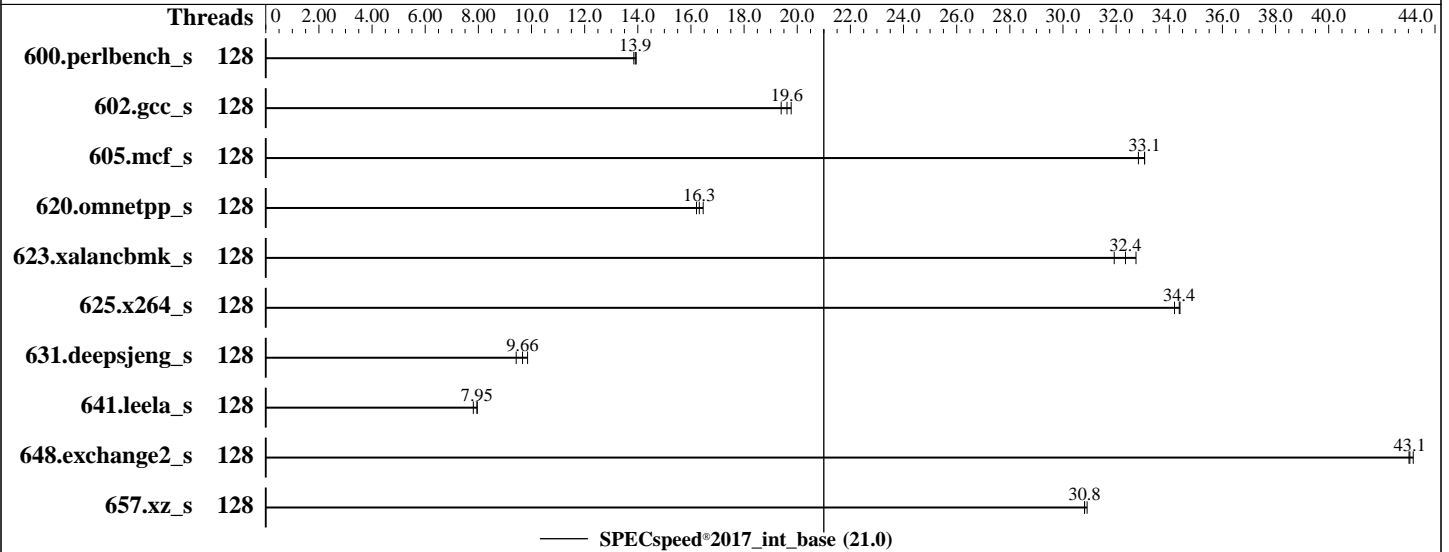

### Hardware

CPU Name: AMD EPYC 9575F  
 Max MHz: 5000  
 Nominal: 3300  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-5600B-R, running at 4800)  
 Storage: 1 x SATA SSD, 960 GB  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 kernel version 6.4.0-150600.21-default  
 C/C++/Fortran: Version 5.0.0 of AOCC  
 Compiler: Yes  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V5.0.0.35 R2.2.0 for D4130-A1x. Released Jan-2025  
 tested as V5.0.0.35 R9.90.0 for D4130-A1x Sep-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Oct-2024  
Hardware Availability: Dec-2024  
Software Availability: Sep-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	<b>128</b>	<b>13.9</b>	127	13.9	128	13.9							
602.gcc_s	128	201	19.8	<b>203</b>	<b>19.6</b>	205	19.4							
605.mcf_s	128	<b>143</b>	<b>33.1</b>	143	33.1	144	32.8							
620.omnetpp_s	128	<b>100</b>	<b>16.3</b>	99.1	16.5	101	16.2							
623.xalancbmk_s	128	<b>43.8</b>	<b>32.4</b>	43.3	32.7	44.4	31.9							
625.x264_s	128	51.6	34.2	51.3	34.4	<b>51.3</b>	<b>34.4</b>							
631.deepsjeng_s	128	<b>148</b>	<b>9.66</b>	145	9.85	152	9.42							
641.leela_s	128	214	7.96	<b>215</b>	<b>7.95</b>	218	7.81							
648.exchange2_s	128	68.1	43.2	68.3	43.0	<b>68.3</b>	<b>43.1</b>							
657.xz_s	128	201	30.8	<b>201</b>	<b>30.8</b>	200	30.9							

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
  "/home/Benchmark/speccpu2017s-Turin/amd_speed_aocc500_znver5_A_lib/lib:/home/Benchmark/speccpu2017s-Tu
rin/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Determinism Slider = Power  
TDP Control = Manual  
TDP Limit = 400  
Package Power Limit Control = Manual  
Package Power Limit = 400  
Power Profile Selection = High Performance  
NUMA nodes per socket = NPS4  
FAN Control = Full

Sysinfo program /home/Benchmark/speccpu2017s-Turin/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Oct 22 20:36:40 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

### Platform Notes (Continued)

- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
20:36:40 up 3 min, 1 user, load average: 0.13, 0.28, 0.13
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1     -             20:35       16.00s      0.81s       0.08s      /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 1542773
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1542773
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_intpeed_aocc500_znver5_A1_3l.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 intspeer
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode speed --tune base --size test:train:refspeed intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templots/preenv.intspeer.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu2017s-Turin
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 64
siblings      : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9575F 64-Core Processor
BIOS Model name:      AMD EPYC 9575F 64-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             1
Stepping:              1
Frequency boost:      enabled
CPU(s) scaling MHz:   67%
CPU max MHz:           5008.0068
CPU min MHz:           1500.0000
BogoMIPS:              6590.25
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

### Platform Notes (Continued)

nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi  
avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_llid debug\_swap

Virtualization: AMD-V  
L1d cache: 3 MiB (64 instances)  
L1i cache: 2 MiB (64 instances)  
L2 cache: 64 MiB (64 instances)  
L3 cache: 256 MiB (8 instances)  
NUMA node(s): 4  
NUMA node0 CPU(s): 0-15,64-79  
NUMA node1 CPU(s): 16-31,80-95  
NUMA node2 CPU(s): 32-47,96-111  
NUMA node3 CPU(s): 48-63,112-127  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability Lltf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP  
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0-15,64-79  
node 0 size: 95938 MB  
node 0 free: 95365 MB  
node 1 cpus: 16-31,80-95  
node 1 size: 96759 MB  
node 1 free: 96233 MB  
node 2 cpus: 32-47,96-111  
node 2 size: 96721 MB  
node 2 free: 96083 MB  
node 3 cpus: 48-63,112-127  
node 3 size: 96300 MB  
node 3 free: 95501 MB  
node distances:  
node 0 1 2 3  
0: 10 12 12 12  
1: 12 10 12 12  
2: 12 12 10 12

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

### Platform Notes (Continued)

3: 12 12 12 10

9. /proc/meminfo  
MemTotal: 394976720 kB

10. who -r  
run-level 3 Oct 22 20:33

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysexit systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevid virtnwfilterd virtsecret d virtstoraged vncserver@
indirect	pcscd systemd-userdbd tftp wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=803d1916-887f-4e1e-bc36-alab2542d352  
splash=silent  
resume=/dev/disk/by-uuid/ff08e126-00b4-4583-943a-09584dbe7c67  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=369M,high  
crashkernel=72M,low

14. cpupower frequency-info  
analyzing CPU 32:  
current policy: frequency should be within 1.50 GHz and 3.30 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl  
kernel.numa\_balancing 1

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

### Platform Notes (Continued)

```

kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/Benchmark/speccpu2017s-Turin
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   476G  31G  446G   7% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY RX1440 M2
Product Family: SERVER
Serial:          xxxxxxxxxx

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

Memory:  
12x Samsung M321R4GA3PB0-CWMKH 32 GB 2 rank 5600, configured at 4800

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: FUJITSU // American Megatrends Inc.  
BIOS Version: V5.0.0.35 R9.90.0 for D4130-Alx  
BIOS Date: 09/13/2024  
BIOS Revision: 9.90  
Firmware Revision: 2.45

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base) 657.xz\_s(base)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

=====  
C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

=====  
Fortran | 648.exchange2\_s(base)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

### C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_int\_base = 21.0

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Oct-2024  
**Hardware Availability:** Dec-2024  
**Software Availability:** Sep-2024

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-22 07:36:40-0400.  
Report generated on 2024-11-06 12:22:50 by CPU2017 PDF formatter v6716.  
Originally published on 2024-11-05.