SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

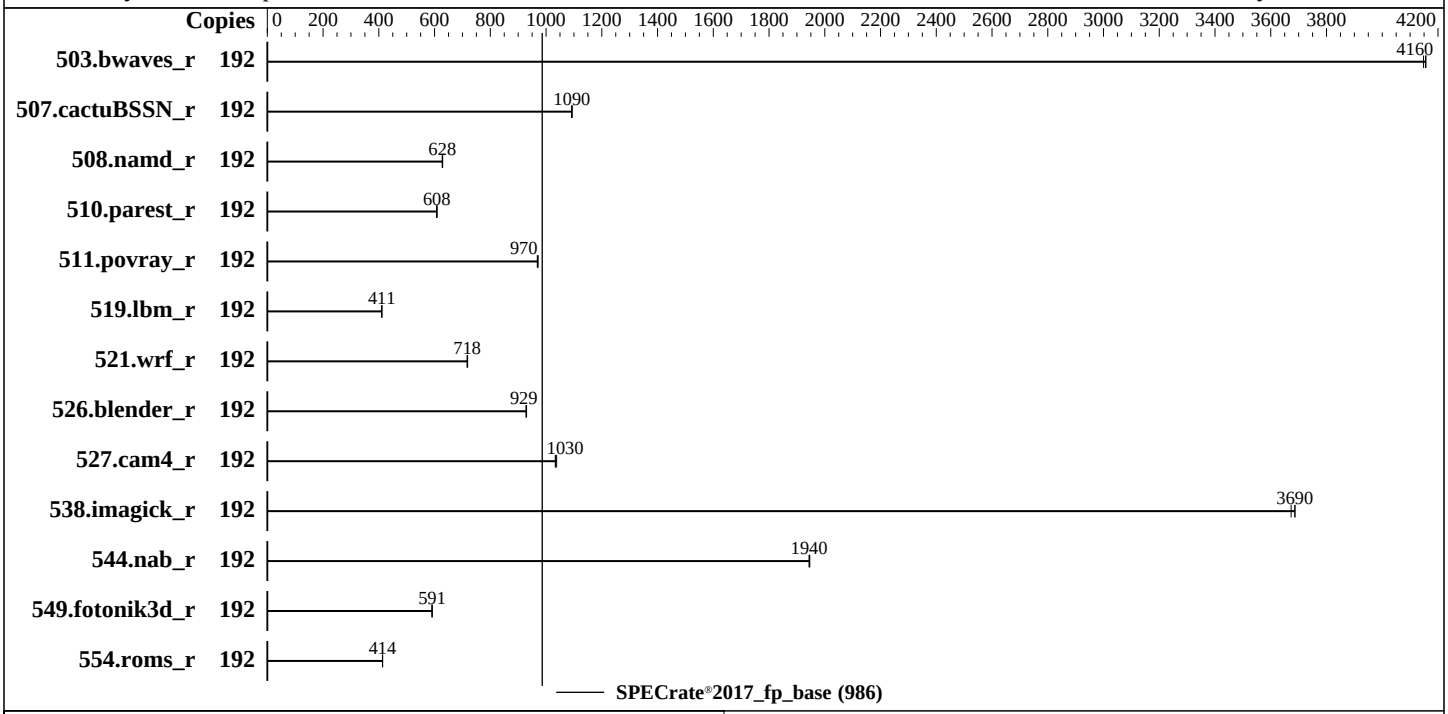

Hardware

CPU Name:	Intel Xeon Platinum 8558
Max MHz:	4000
Nominal:	2100
Enabled:	96 cores, 2 chips, 2 threads/core
Orderable:	2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	260 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
Storage:	1x 480 GB M.2 NVMe SSD
Other:	CPU Cooling: DLC

Software

OS:	Rocky Linux 9.4 (Blue Onyx) Kernel 5.14.0-427.13.1.el9_4.x86_64
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 2.4 released Oct-2024
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-221GE-TNHT-LCC
(X13DEG-R, Intel Xeon Platinum 8558)

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	**463**	**4160**	463	4160	464	4150							
507.cactuBSSN_r	192	223	1090	**222**	**1090**	222	1090							
508.namd_r	192	291	628	290	629	**290**	**628**							
510.parest_r	192	**826**	**608**	827	607	825	609							
511.povray_r	192	463	969	462	971	**462**	**970**							
519.lbm_r	192	493	411	493	411	**493**	**411**							
521.wrf_r	192	598	719	**599**	**718**	600	717							
526.blender_r	192	314	930	**315**	**929**	315	928							
527.cam4_r	192	**325**	**1030**	325	1030	324	1040							
538.imagick_r	192	**130**	**3690**	130	3690	130	3670							
544.nab_r	192	166	1950	**166**	**1940**	166	1940							
549.fotonik3d_r	192	1265	591	**1266**	**591**	1266	591							
554.roms_r	192	**738**	**414**	738	414	739	413							

SPECrate®2017_fp_base = 986

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017-1.1.9/lib/intel64:/root/cpu2017-1.1.9/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
Adjacent Cache Prefetch = Disabled
DCU Streamer Prefetcher = Disable
SNC = Enable SNC2 (2-clusters)
LLC Dead Line Alloc = Disable
KTI Prefetch = Enable
Stale AtoS = Disable
Patrol Scrub = Disable
VT-d = Disabled
SR-IOV Support = Disabled

Sysinfo program /root/cpu2017-1.1.9/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on qh008 Thu Dec 12 18:50:31 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
1. uname -a
  Linux qh008 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed May 1 19:11:28 UTC 2024 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:50:31 up  3:23,  0 users,  load average: 148.85, 182.01, 187.44
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4124660
  max locked memory           (kbytes, -l) unlimited
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4124660
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 SCREEN
 /bin/bash
 /bin/bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017-1.1.9

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) PLATINUM 8558
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000283
```

(Continued on next page)

Platform Notes (Continued)

```
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
     cpu cores       : 48
     siblings        : 96
     2 physical ids (chips)
     192 processors (hardware threads)
     physical id 0: core ids 0-47
     physical id 1: core ids 0-47
     physical id 0: apicids 0-95
     physical id 1: apicids 128-223
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        46 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               192
   On-line CPU(s) list:                  0-191
   Vendor ID:                            GenuineIntel
   BIOS Vendor ID:                       Intel(R) Corporation
   Model name:                           INTEL(R) XEON(R) PLATINUM 8558
   BIOS Model name:                      INTEL(R) XEON(R) PLATINUM 8558
   CPU family:                           6
   Model:                                207
   Thread(s) per core:                   2
   Core(s) per socket:                   48
   Socket(s):                            2
   Stepping:                             2
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   100%
   CPU max MHz:                          2101.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             4200.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                         clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                         rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                         xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                         dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                         pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                                         avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                                         cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                         tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                         xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm
                                         ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                                         gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                                         la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                                         md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                         amx_tile amx_int8 flush_l1d arch_capabilities
   Virtualization:                       VT-x
   L1d cache:                            4.5 MiB (96 instances)
   L1i cache:                            3 MiB (96 instances)
   L2 cache:                             192 MiB (96 instances)
   L3 cache:                             520 MiB (2 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node(s):                         4
  NUMA node0 CPU(s):                    0-23,96-119
  NUMA node1 CPU(s):                    24-47,120-143
  NUMA node2 CPU(s):                    48-71,144-167
  NUMA node3 CPU(s):                    72-95,168-191
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow: Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                        PBRSB-eIBRS SW sequence
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.5M   12 Data            1     64        1             64
     L1i       32K       3M    8 Instruction     1     64        1             64
     L2         2M     192M   16 Unified         2   2048        1             64
     L3       260M     520M   20 Unified         3 212992        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-23,96-119
  node 0 size: 257156 MB
  node 0 free: 243870 MB
  node 1 cpus: 24-47,120-143
  node 1 size: 258035 MB
  node 1 free: 246891 MB
  node 2 cpus: 48-71,144-167
  node 2 size: 258035 MB
  node 2 free: 247278 MB
  node 3 cpus: 72-95,168-191
  node 3 size: 257978 MB
  node 3 free: 247400 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055956072 kB

------------------------------------------------------------
10. who -r
  run-level 3 Dec 12 15:27

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
```

(Continued on next page)

Platform Notes (Continued)

```
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                    LOAD   ACTIVE SUB    DESCRIPTION
  * beegfs-client.service   loaded failed failed Start BeeGFS Client
  * beegfs-meta.service     loaded failed failed BeeGFS Metadata Server
  * beegfs-mgmtd.service    loaded failed failed BeeGFS Management Server
  * beegfs-storage.service loaded failed failed BeeGFS Storage Server

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd beegfs-client
                   beegfs-helperd beegfs-meta beegfs-mgmtd beegfs-storage chronyd crond dbus-broker getty@
                   irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname nvidia-hibernate
                   nvidia-powerd nvidia-resume nvidia-suspend nvmefc-boot-connections openibd pbs rpcbind
                   rsyslog rtkit-daemon sd5 selinux-autorelabel-mark sshd sssd systemd-boot-update
                   systemd-network-generator udisks2 upower
  enabled-runtime  rc-local rpc-statd systemd-remount-fs
  disabled         beegfs-client@ beegfs-eventlistener beegfs-helperd@ beegfs-meta@ beegfs-mgmtd@
                   beegfs-storage@ canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower
                   debug-shell dkms dnf-system-upgrade firewalld gssproxy hpl ibacm kvm_stat
                   man-db-restart-cache-update nfs-blkmap nfs-server nftables nvidia-persistenced
                   nvmf-autoconnect opensmd opensmd@ pbs@ pesign rdisc rpmdb-rebuild rshim
                   selinux-check-proper-disable serial-getty@ srp_daemon srp_daemon_port@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                   systemd-sysupdate-reboot

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd2,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=UUID=86a350bc-0c9e-4605-9cb3-9c3bb1ffe147
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=UUID=babd21ac-1e02-4609-b64a-6df97bc2b450
  rd.driver.blacklist=nouveau
  modprobe.blacklist=nouveau
  selinux=0

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 102:
    current policy: frequency should be within 800 MHz and 2.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirty_bytes                    0
  vm.dirty_expire_centisecs      3000
  vm.dirty_ratio                   20
  vm.dirty_writeback_centisecs    500
  vm.dirtytime_expire_seconds   43200
  vm.extfrag_threshold            500
  vm.min_unmapped_ratio             1
  vm.nr_hugepages                   0
  vm.nr_hugepages_mempolicy         0
  vm.nr_overcommit_hugepages        0
  vm.swappiness                    60
  vm.watermark_boost_factor     15000
  vm.watermark_scale_factor        10
  vm.zone_reclaim_mode              0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Rocky Linux 9.4 (Blue Onyx)
  redhat-release Rocky Linux release 9.4 (Blue Onyx)
  rocky-release  Rocky Linux release 9.4 (Blue Onyx)
  system-release Rocky Linux release 9.4 (Blue Onyx)

------------------------------------------------------------
20. Disk information
SPEC is set to: /root/cpu2017-1.1.9
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme2n1p3 xfs   216G   73G  144G  34% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Supermicro
    Product:        SYS-221GE-TNHT-LC2-ST036
    Product Family: SMC X13
    Serial:         A919390X4903248

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
```

(Continued on next page)

Platform Notes (Continued)

```
     10x Micron Technology MTC40F2046S1RC56BD1 MLCC 64 GB 2 rank 5600, configured at 5200
     6x Micron Technology MTC40F2046S1RC56BD1 MMCC 64 GB 2 rank 5600, configured at 5200


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      2.4
    BIOS Date:         10/25/2024
    BIOS Revision:     5.32
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-12 04:50:30-0500.
Report generated on 2025-01-15 12:33:33 by CPU2017 PS formatter v6716.
Originally published on 2025-01-14.