



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro


Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

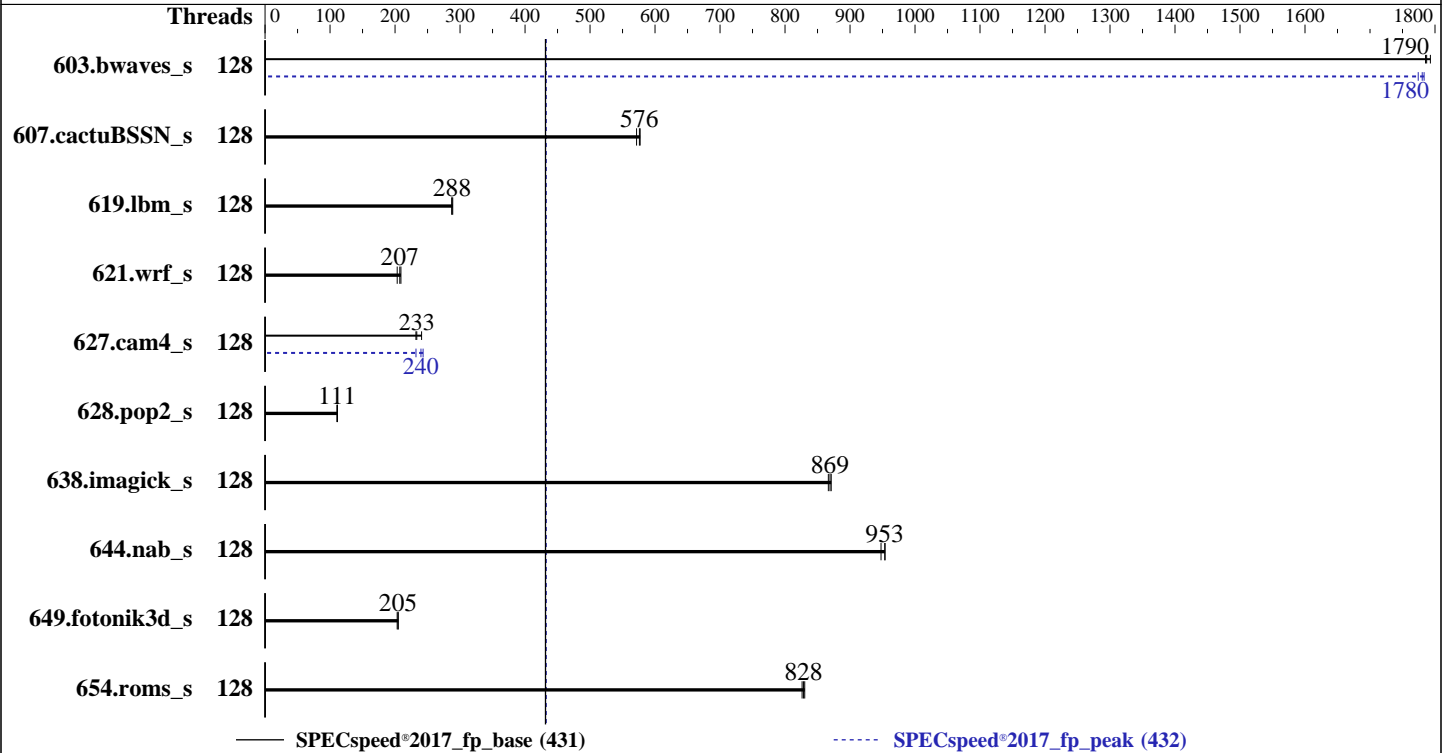

Hardware

CPU Name: Intel Xeon 6980P
Max MHz: 3900
Nominal: 2000
Enabled: 128 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 504 MB I+D on chip per chip
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-8800B-R)
Storage: 1 x 256 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 1.0 released Nov-2024
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	32.9	1790	33.0	1790	<u>33.0</u>	<u>1790</u>	128	33.1	1780	33.3	1770	<u>33.1</u>	<u>1780</u>
607.cactuBSSN_s	128	29.2	572	28.9	577	<u>28.9</u>	<u>576</u>	128	29.2	572	28.9	577	<u>28.9</u>	<u>576</u>
619.lbm_s	128	18.2	287	18.1	289	<u>18.2</u>	<u>288</u>	128	18.2	287	18.1	289	<u>18.2</u>	<u>288</u>
621.wrf_s	128	65.1	203	<u>63.8</u>	<u>207</u>	63.3	209	128	65.1	203	<u>63.8</u>	<u>207</u>	63.3	209
627.cam4_s	128	38.2	232	<u>38.0</u>	<u>233</u>	36.8	241	128	38.2	232	<u>37.0</u>	<u>240</u>	36.5	243
628.pop2_s	128	<u>107</u>	<u>111</u>	107	111	107	111	128	<u>107</u>	<u>111</u>	107	111	107	111
638.imagick_s	128	16.6	867	16.6	871	<u>16.6</u>	<u>869</u>	128	16.6	867	16.6	871	<u>16.6</u>	<u>869</u>
644.nab_s	128	18.3	954	18.4	948	<u>18.3</u>	<u>953</u>	128	18.3	954	18.4	948	<u>18.3</u>	<u>953</u>
649.fotonik3d_s	128	44.5	205	<u>44.5</u>	<u>205</u>	44.8	203	128	44.5	205	<u>44.5</u>	<u>205</u>	44.8	203
654.roms_s	128	<u>19.0</u>	<u>828</u>	19.1	826	19.0	830	128	<u>19.0</u>	<u>828</u>	19.1	826	19.0	830

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Platform Notes

BIOS Configuration:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
SNC = Enable
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Dec 13 15:59:33 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36cle09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
15:59:33 up 7 min, 1 user, load average: 0.01, 0.26, 0.19
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 15:57 13.00s 0.84s 0.00s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP, Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```

scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094037
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 3094037
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=128 --tune base,peak -o all --define smt-on
--define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=128 --tune base,peak --output_format all
--define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
--nopreenv --note-preenv --logfile $$SPEC/tmp/CPU2017.007/templogs/preenv.fpspeed.007.0.log --lognum 007.0
--from_runcpu 2
specperl $$SPEC/bin/sysinfo
$$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6980P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000341
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 128
siblings       : 256
1 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-42,64-106,128-169
physical id 0: apicids 0-85,128-213,256-339
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP, Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```

Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6980P
BIOS Model name: Intel(R) Xeon(R) 6980P CPU @ 2.0GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 128
Socket(s): 1
Stepping: 1
CPU(s) scaling MHz: 24%
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
arch_capabilities
Virtualization: VT-x
L1d cache: 6 MiB (128 instances)
L1i cache: 8 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 504 MiB (1 instance)
NUMA node(s): 3
NUMA node0 CPU(s): 0-42,128-170
NUMA node1 CPU(s): 43-85,171-213
NUMA node2 CPU(s): 86-127,214-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	64K	8M	16	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	504M	504M	16	Unified	3	516096	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 3 nodes (0-2)
node 0 cpus: 0-42,128-170
node 0 size: 257565 MB
node 0 free: 256532 MB
node 1 cpus: 43-85,171-213
node 1 size: 258025 MB
node 1 free: 257156 MB
node 2 cpus: 86-127,214-255
node 2 size: 257947 MB
node 2 free: 257129 MB
node distances:
node  0  1  2
  0: 10 12 12
  1: 12 10 12
  2: 12 12 10

```

9. /proc/meminfo

MemTotal: 792103416 kB

10. who -r

run-level 3 Dec 13 15:53

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
generated	jexec
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=61c5e10f-e2b6-4af8-baf4-1fad022c671
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 200:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. tuned-adm active
  Current active profile: throughput-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swapped       64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP, Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Platform Notes (Continued)

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme1nlp2 btrfs 236G 45G 189G 20% /home

21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: Family
Serial: 0123456789

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
6x Micron Technology MTC40F2046S1HC88XD1 WCCCC 64 GB 2 rank 8800
6x Micron Technology MTC40F2046S1HC88XD1 WFFFG 64 GB 2 rank 8800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.0
BIOS Date: 11/18/2024
BIOS Revision: 5.35

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2024
Hardware Availability: Jan-2025
Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper SuperServer SYS-212HA-TN
(X14SBH-AP , Intel Xeon 6980P)

SPECspeed®2017_fp_base = 431

SPECspeed®2017_fp_peak = 432

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Dec-2024

Hardware Availability: Jan-2025

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-13 02:59:32-0500.

Report generated on 2025-01-15 12:33:17 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-14.