



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

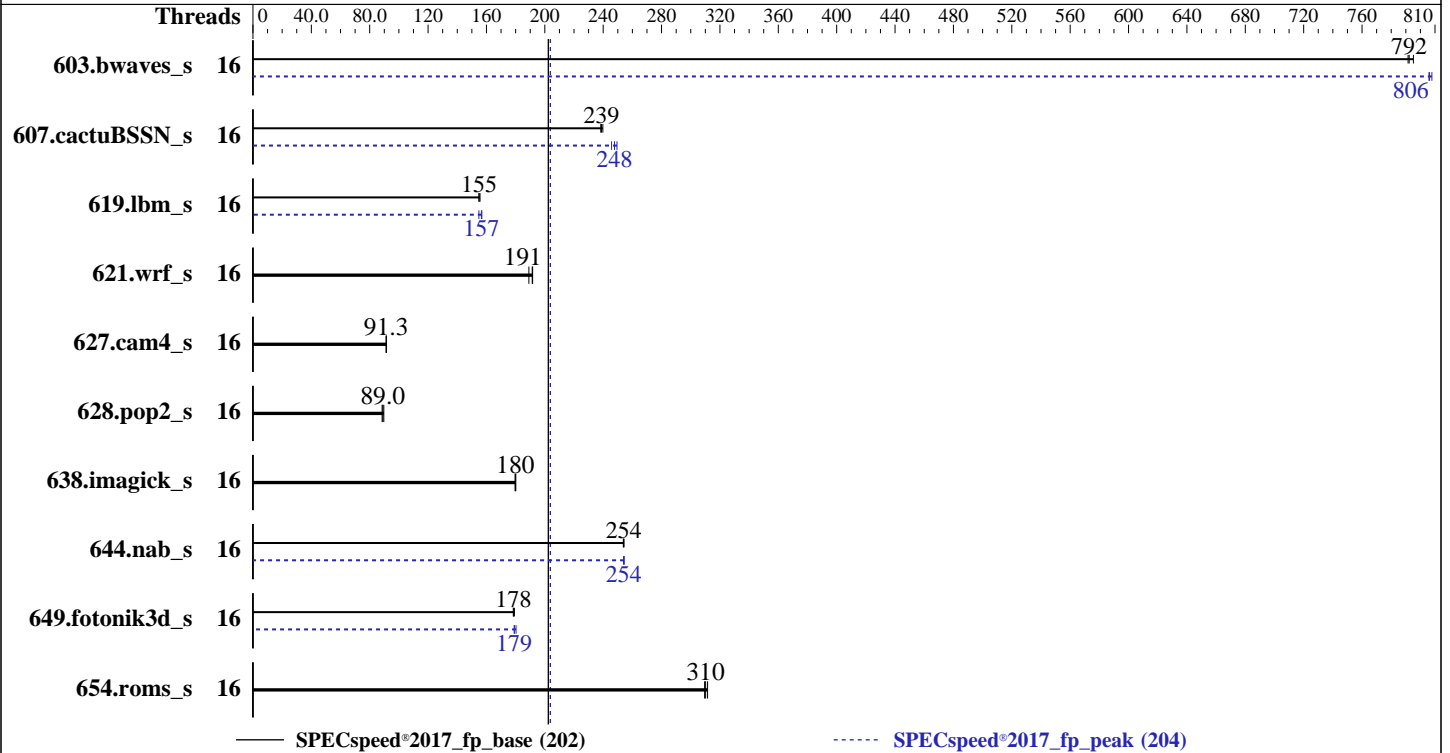

### Hardware

CPU Name: AMD EPYC 9015  
 Max MHz: 4100  
 Nominal: 3600  
 Enabled: 16 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 64 MB I+D on chip per chip,  
 32 MB shared / 4 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R,  
 running at 6000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version v2.20 10/31/2024 released  
 Oct-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECSpeed®2017\_fp\_base = 202

SPECSpeed®2017\_fp\_peak = 204

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Nov-2024  
Hardware Availability: Jan-2025  
Software Availability: Oct-2024

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	74.5	792	<b>74.5</b>	<b>792</b>	74.2	795	16	<b>73.2</b>	<b>806</b>	73.2	806	73.0	808
607.cactuBSSN_s	16	69.5	240	<b>69.8</b>	<b>239</b>	69.9	238	16	66.8	249	<b>67.3</b>	<b>248</b>	67.8	246
619.lbm_s	16	<b>33.8</b>	<b>155</b>	33.7	156	33.8	155	16	33.4	157	33.8	155	<b>33.5</b>	<b>157</b>
621.wrf_s	16	69.0	192	<b>69.1</b>	<b>191</b>	70.0	189	16	69.0	192	<b>69.1</b>	<b>191</b>	70.0	189
627.cam4_s	16	<b>97.0</b>	<b>91.3</b>	97.1	91.3	96.9	91.5	16	<b>97.0</b>	<b>91.3</b>	97.1	91.3	96.9	91.5
628.pop2_s	16	132	89.7	<b>133</b>	<b>89.0</b>	134	88.5	16	132	89.7	<b>133</b>	<b>89.0</b>	134	88.5
638.imagick_s	16	80.1	180	80.3	180	<b>80.2</b>	<b>180</b>	16	80.1	180	80.3	180	<b>80.2</b>	<b>180</b>
644.nab_s	16	68.8	254	68.7	254	<b>68.8</b>	<b>254</b>	16	<b>68.8</b>	<b>254</b>	68.8	254	68.7	254
649.fotonik3d_s	16	50.9	179	51.1	178	<b>51.1</b>	<b>178</b>	16	50.9	179	50.6	180	<b>50.9</b>	<b>179</b>
654.roms_s	16	50.5	312	50.9	309	<b>50.8</b>	<b>310</b>	16	50.5	312	50.9	309	<b>50.8</b>	<b>310</b>

SPECSpeed®2017\_fp\_base = **202**

SPECSpeed®2017\_fp\_peak = **204**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen11**

(3.60 GHz, AMD EPYC 9015)

**SPECspeed®2017\_fp\_base = 202**

**SPECspeed®2017\_fp\_peak = 204**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-15"

LD\_LIBRARY\_PATH =

"/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "16"

Environment variables set by runcpu during the 603.bwaves\_s peak run:

GOMP\_CPU\_AFFINITY = "0-15"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:

GOMP\_CPU\_AFFINITY = "0-15"

Environment variables set by runcpu during the 619.lbm\_s peak run:

GOMP\_CPU\_AFFINITY = "0-15"

Environment variables set by runcpu during the 644.nab\_s peak run:

GOMP\_CPU\_AFFINITY = "0-15"

Environment variables set by runcpu during the 649.fotonik3d\_s peak run:

GOMP\_CPU\_AFFINITY = "0-15"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

AMD SMT Option set to Disabled

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Nov 26 20:35:02 2024

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen11**

(3.60 GHz, AMD EPYC 9015)

**SPECspeed®2017\_fp\_base = 202**

**SPECspeed®2017\_fp\_peak = 204**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. `uname -a`  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. `w`  
20:35:02 up 4 min, 1 user, load average: 0.93, 0.51, 0.22  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 172.17.1.109 22Apr24 14.00s 0.88s 0.15s /bin/bash ./amd\_speed\_aocc500\_znver5\_A1.sh

-----

3. Username  
From environment variable \$USER: root

-----

4. `ulimit -a`

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	3094812
max locked memory	(kbytes, -l)	2097152
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	3094812

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen11**

(3.60 GHz, AMD EPYC 9015)

**SPECspeed®2017\_fp\_base = 202**

**SPECspeed®2017\_fp\_peak = 204**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_fpspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.036/templogs/preenv.fpspeed.036.0.log --lognum 036.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9015 8-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 8
siblings       : 8
2 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-7
physical id 1: apicids 8-15
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:  0-15
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9015 8-Core Processor
BIOS Model name:      AMD EPYC 9015 8-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   1
Core(s) per socket:   8
Socket(s):             2

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

## SPECspeed®2017\_fp\_base = 202

## SPECspeed®2017\_fp\_peak = 204

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 105%
CPU max MHz: 3600.0000
CPU min MHz: 1500.0000
BogoMIPS: 7189.33
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpoptcdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap

Virtualization: AMD-V
L1d cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 16 MiB (16 instances)
L3 cache: 128 MiB (4 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 768K 12 Data 1 64 1 64
L1i 32K 512K 8 Instruction 1 64 1 64
L2 1M 16M 16 Unified 2 1024 1 64
L3 32M 128M 16 Unified 3 32768 1 64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen11**

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
available: 2 nodes (0-1)
node 0 cpus: 0-7
node 0 size: 386713 MB
node 0 free: 385773 MB
node 1 cpus: 8-15
node 1 size: 387014 MB
node 1 free: 386205 MB
node distances:
node  0  1
  0: 10 32
  1: 32 10
```

```
-----
9. /proc/meminfo
MemTotal:      792297428 kB
```

```
-----
10. who -r
run-level 3 Apr 22 17:30
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels
                rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
                haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
                serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
                systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect       pcsd systemd-userdbd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=43ae4fbb-2791-43f8-9772-fc23423b366a
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 3:
  current policy: frequency should be within 1.50 GHz and 3.60 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
No current active profile.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3      btrfs 445G  27G 415G   6% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL365 Gen11
Product Family: ProLiant
Serial:          DL365GEN11-010

```

```

-----
22. dmidecode

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen11**

(3.60 GHz, AMD EPYC 9015)

**SPECspeed®2017\_fp\_base = 202**

**SPECspeed®2017\_fp\_peak = 204**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400, configured at 6000

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 2.20  
BIOS Date: 10/31/2024  
BIOS Revision: 2.20  
Firmware Revision: 1.63

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Jan-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang
```

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9015)

SPECspeed®2017\_fp\_base = 202

SPECspeed®2017\_fp\_peak = 204

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-26 10:05:01-0500.

Report generated on 2025-01-28 22:05:21 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-28.