SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7 (AMD EPYC 9655)
AMD EPYC 9655

SPECrate®2017_int_base = 2120

SPECrate®2017_int_peak = 2170

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Dec-2024

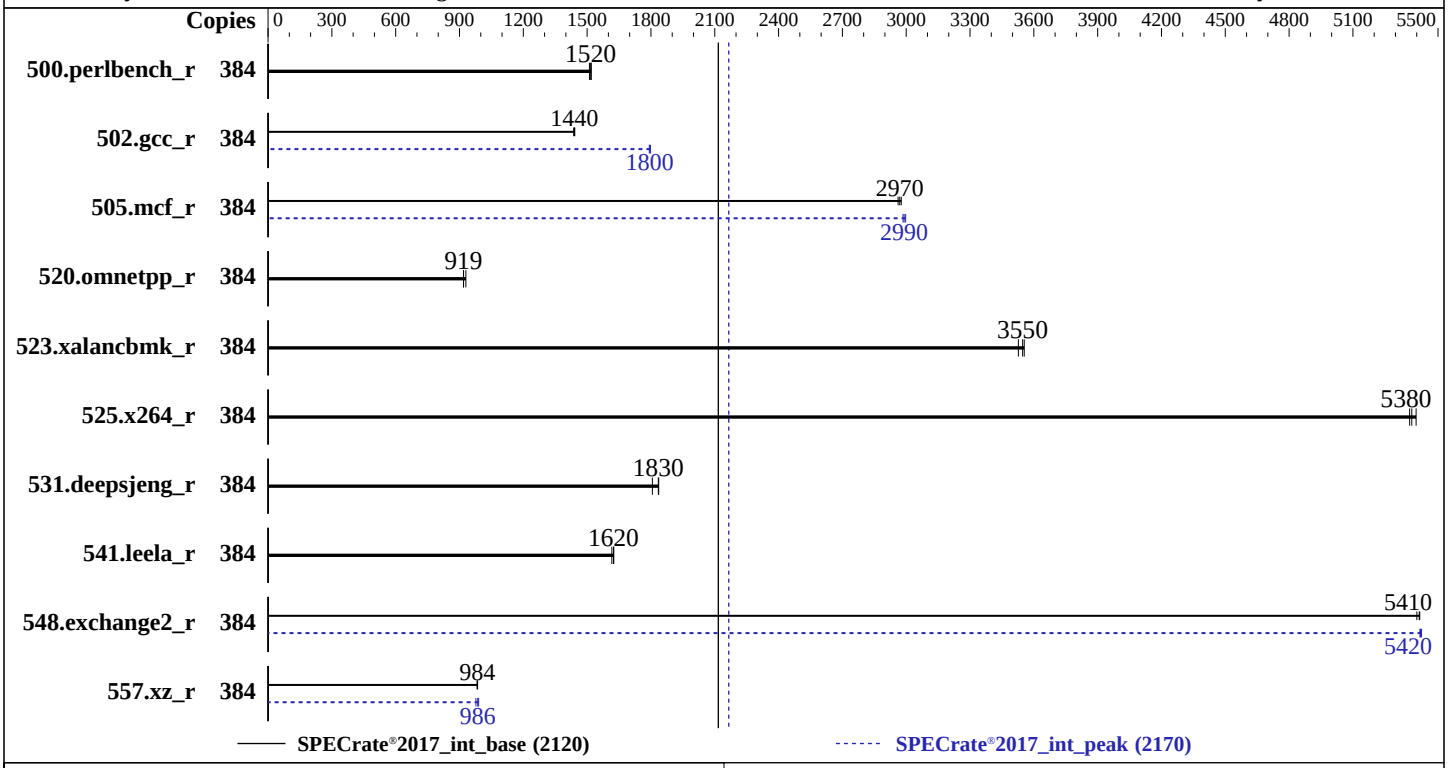

Hardware

CPU Name:	AMD EPYC 9655
Max MHz:	4500
Nominal:	2600
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage:	1 x 3.84TB SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.1 LTS kernel version 6.8.0-51-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 7.30.05 released Dec-2024
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7 (AMD EPYC 9655)
AMD EPYC 9655

SPECrate®2017_int_base = 2120

SPECrate®2017_int_peak = 2170

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Dec-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	402	1520	**403**	**1520**	405	1510	384	402	1520	**403**	**1520**	405	1510
502.gcc_r	384	**377**	**1440**	377	1440	378	1440	384	303	1790	**303**	**1800**	302	1800
505.mcf_r	384	**209**	**2970**	208	2980	210	2960	384	**208**	**2990**	207	3000	208	2990
520.omnetpp_r	384	542	930	**548**	**919**	548	919	384	542	930	**548**	**919**	548	919
523.xalancbmk_r	384	115	3530	114	3550	**114**	**3550**	384	115	3530	114	3550	**114**	**3550**
525.x264_r	384	**125**	**5380**	125	5370	125	5400	384	**125**	**5380**	125	5370	125	5400
531.deepsjeng_r	384	240	1840	**240**	**1830**	244	1810	384	240	1840	**240**	**1830**	244	1810
541.leela_r	384	391	1630	393	1620	**392**	**1620**	384	391	1630	393	1620	**392**	**1620**
548.exchange2_r	384	**186**	**5410**	186	5410	186	5400	384	186	5420	186	5420	**186**	**5420**
557.xz_r	384	**421**	**984**	421	985	422	983	384	**421**	**986**	424	977	419	990

SPECrate®2017_int_base = 2120

SPECrate®2017_int_peak = 2170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:/us
     r/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr/local/isl-027/lib:/usr/local/g
     cc-1420/lib64:/usr/local/lib:/usr/lib:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compi
     ler-5.0.0/lib32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
SMT Control set to Enabled
SVM Mode set to Disabled
Power Profile Selection set to High Performance Mode
Determinism Slider set to Power
cTDP set to 400
PPT set to 400
NUMA nodes per socket set to NPS 4
ACPI SRAT L3 cache as NUMA domain set to Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on h3c Tue Jan 21 13:35:54 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux h3c 6.8.0-51-generic #52-Ubuntu SMP PREEMPT_DYNAMIC Thu Dec  5 13:09:44 UTC 2024 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   13:35:54 up  2:28,  1 user,  load average: 0.23, 0.06, 0.02
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                13:34   26.00s  1.04s  0.18s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6189714
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.017/templogs/preenv.intrate.017.0.log --lognum 017.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9655 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00211a
```

(Continued on next page)

Platform Notes (Continued)

```
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 192 4K pages
     cpu cores       : 96
     siblings        : 192
     2 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-95
     physical id 1: core ids 0-95
     physical id 0: apicids 0-191
     physical id 1: apicids 256-447
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 9655 96-Core Processor
   BIOS Model name:                      AMD EPYC 9655 96-Core Processor                 Unknown CPU @ 2.6GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                2
   Thread(s) per core:                   2
   Core(s) per socket:                   96
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   36%
   CPU max MHz:                          4509.3750
   CPU min MHz:                          1500.0000
   BogoMIPS:                             5187.94
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                         xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                         nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                         pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                         avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                         avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                         movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                         flush_l1d debug_swap
   L1d cache:                            9 MiB (192 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L1i cache:                           6 MiB (192 instances)
  L2 cache:                            192 MiB (192 instances)
  L3 cache:                            768 MiB (24 instances)
  NUMA node(s):                        24
  NUMA node0 CPU(s):                   0-7,192-199
  NUMA node1 CPU(s):                   8-15,200-207
  NUMA node2 CPU(s):                   16-23,208-215
  NUMA node3 CPU(s):                   24-31,216-223
  NUMA node4 CPU(s):                   32-39,224-231
  NUMA node5 CPU(s):                   40-47,232-239
  NUMA node6 CPU(s):                   48-55,240-247
  NUMA node7 CPU(s):                   56-63,248-255
  NUMA node8 CPU(s):                   64-71,256-263
  NUMA node9 CPU(s):                   72-79,264-271
  NUMA node10 CPU(s):                  80-87,272-279
  NUMA node11 CPU(s):                  88-95,280-287
  NUMA node12 CPU(s):                  96-103,288-295
  NUMA node13 CPU(s):                  104-111,296-303
  NUMA node14 CPU(s):                  112-119,304-311
  NUMA node15 CPU(s):                  120-127,312-319
  NUMA node16 CPU(s):                  128-135,320-327
  NUMA node17 CPU(s):                  136-143,328-335
  NUMA node18 CPU(s):                  144-151,336-343
  NUMA node19 CPU(s):                  152-159,344-351
  NUMA node20 CPU(s):                  160-167,352-359
  NUMA node21 CPU(s):                  168-175,360-367
  NUMA node22 CPU(s):                  176-183,368-375
  NUMA node23 CPU(s):                  184-191,376-383
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Vulnerable
  Vulnerability Spectre v1:            Vulnerable: __user pointer sanitization and usercopy barriers only;
                                       no swapgs barriers
  Vulnerability Spectre v2:            Vulnerable; IBPB: disabled; STIBP: disabled; PBRSB-eIBRS: Not
                                       affected; BHI: Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M   16 Unified         2  1024        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 24 nodes (0-23)
  node 0 cpus: 0-7,192-199
  node 0 size: 63933 MB
  node 0 free: 63691 MB
  node 1 cpus: 8-15,200-207
```

(Continued on next page)

Platform Notes (Continued)

```
node 1 size: 64506 MB
node 1 free: 64314 MB
node 2 cpus: 16-23,208-215
node 2 size: 64506 MB
node 2 free: 64306 MB
node 3 cpus: 24-31,216-223
node 3 size: 64506 MB
node 3 free: 64338 MB
node 4 cpus: 32-39,224-231
node 4 size: 64506 MB
node 4 free: 64333 MB
node 5 cpus: 40-47,232-239
node 5 size: 64506 MB
node 5 free: 64245 MB
node 6 cpus: 48-55,240-247
node 6 size: 64506 MB
node 6 free: 64362 MB
node 7 cpus: 56-63,248-255
node 7 size: 64506 MB
node 7 free: 64361 MB
node 8 cpus: 64-71,256-263
node 8 size: 64506 MB
node 8 free: 64352 MB
node 9 cpus: 72-79,264-271
node 9 size: 64506 MB
node 9 free: 64352 MB
node 10 cpus: 80-87,272-279
node 10 size: 64506 MB
node 10 free: 64306 MB
node 11 cpus: 88-95,280-287
node 11 size: 64506 MB
node 11 free: 64307 MB
node 12 cpus: 96-103,288-295
node 12 size: 64506 MB
node 12 free: 64334 MB
node 13 cpus: 104-111,296-303
node 13 size: 64506 MB
node 13 free: 64355 MB
node 14 cpus: 112-119,304-311
node 14 size: 64506 MB
node 14 free: 64298 MB
node 15 cpus: 120-127,312-319
node 15 size: 64506 MB
node 15 free: 64335 MB
node 16 cpus: 128-135,320-327
node 16 size: 64506 MB
node 16 free: 64361 MB
node 17 cpus: 136-143,328-335
node 17 size: 64506 MB
node 17 free: 64326 MB
node 18 cpus: 144-151,336-343
node 18 size: 64506 MB
node 18 free: 64342 MB
node 19 cpus: 152-159,344-351
node 19 size: 64506 MB
node 19 free: 64280 MB
node 20 cpus: 160-167,352-359
node 20 size: 64506 MB
node 20 free: 64352 MB
node 21 cpus: 168-175,360-367
```

(Continued on next page)

Platform Notes (Continued)

```
  node 21 size: 64506 MB
  node 21 free: 64347 MB
  node 22 cpus: 176-183,368-375
  node 22 size: 64506 MB
  node 22 free: 64295 MB
  node 23 cpus: 184-191,376-383
  node 23 size: 64424 MB
  node 23 free: 64274 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23
    0:  10  11  11  12  12  12  12  12  12  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    1:  11  10  11  12  12  12  12  12  12  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    2:  11  11  10  12  12  12  12  12  12  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    3:  12  12  12  10  11  11  12  12  12  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    4:  12  12  12  11  10  11  12  12  12  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    5:  12  12  12  11  11  10  12  12  12  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    6:  12  12  12  12  12  12  10  11  11  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    7:  12  12  12  12  12  12  11  10  11  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    8:  12  12  12  12  12  12  11  11  10  12  12  12  22  22  22  22  22  22  22  22  22  22  22  22
    9:  12  12  12  12  12  12  12  12  12  10  11  11  22  22  22  22  22  22  22  22  22  22  22  22
   10:  12  12  12  12  12  12  12  12  12  11  10  11  22  22  22  22  22  22  22  22  22  22  22  22
   11:  12  12  12  12  12  12  12  12  12  11  11  10  22  22  22  22  22  22  22  22  22  22  22  22
   12:  22  22  22  22  22  22  22  22  22  22  22  22  10  11  11  12  12  12  12  12  12  12  12  12
   13:  22  22  22  22  22  22  22  22  22  22  22  22  11  10  11  12  12  12  12  12  12  12  12  12
   14:  22  22  22  22  22  22  22  22  22  22  22  22  11  11  10  12  12  12  12  12  12  12  12  12
   15:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  10  11  11  12  12  12  12  12  12
   16:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  11  10  11  12  12  12  12  12  12
   17:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  11  11  10  12  12  12  12  12  12
   18:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  12  12  12  10  11  11  12  12  12
   19:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  12  12  12  11  10  11  12  12  12
   20:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  12  12  12  11  11  10  12  12  12
   21:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  12  12  12  12  12  12  10  11  11
   22:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  12  12  12  12  12  12  11  10  11
   23:  22  22  22  22  22  22  22  22  22  22  22  22  12  12  12  12  12  12  12  12  12  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584639668 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jan 21 11:07

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
  Legend: LOAD   -> Reflects whether the unit definition was properly loaded.
          ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
          SUB    -> The low-level unit activation state, values depend on unit type.
  1 loaded units listed.

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
```

(Continued on next page)

Platform Notes (Continued)

```
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
                   apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
                   cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback
                   keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi
                   open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
                   systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
                   ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
                   wpa_supplicant@
  indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-6.8.0-51-generic
  root=UUID=5079c432-fd48-464d-92df-94ceb7591bc8
  ro
  iommu=pt
  mitigations=off
  security=none

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 212:
    current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                    The governor "schedutil" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2600MHz

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.zone_reclaim_mode              1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.1 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda4      ext4  3.4T   20G  3.2T   1% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         AMD Corporation
    Product:        Quartz
    Product Family: Rack

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Samsung M321R8GA0EB2-CCPPC 64 GB 2 rank 6400, configured at 6000


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      7.30.05
   BIOS Date:         12/20/2024
   BIOS Revision:     5.35
   Firmware Revision: 2.1
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `basepeak = yes`

502.gcc_r: `-m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner -z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -fgnu89-inline -lamdalloc`

505.mcf_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang -lamdalloc-ext -ldl`

525.x264_r: `basepeak = yes`

557.xz_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining`

(Continued on next page)

Peak Optimization Flags (Continued)

557.xz_r (continued):
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.5-Turin.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.5-Turin.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-21 08:35:53-0500.
Report generated on 2025-02-25 19:04:13 by CPU2017 PS formatter v6716.
Originally published on 2025-02-25.