SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9734 2.20 GHz Processor)

SPECspeed®2017_int_base = 11.6

SPECspeed®2017_int_peak = 11.7

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2024

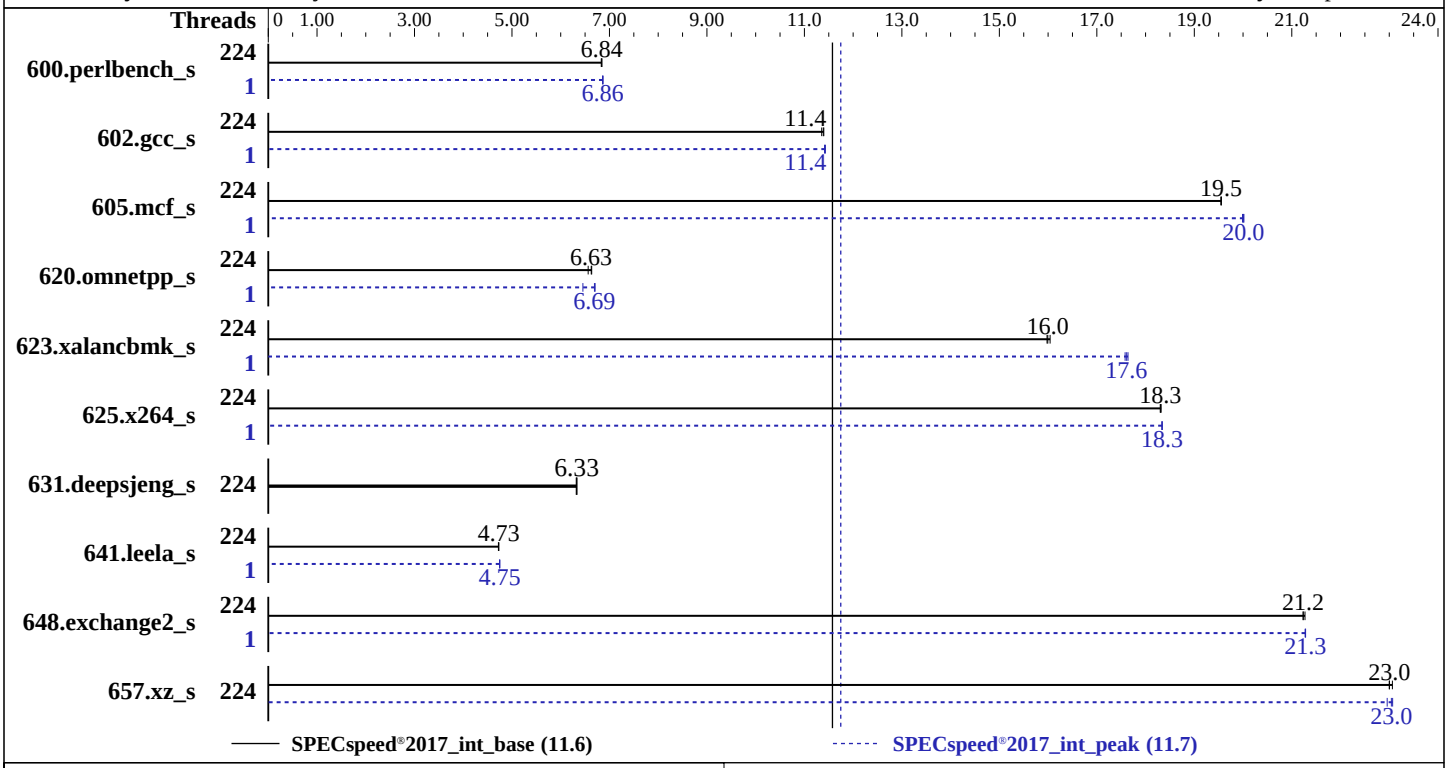

Hardware

CPU Name:	AMD EPYC 9734
Max MHz:	3000
Nominal:	2200
Enabled:	224 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 7 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage:	1 x 960 GB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 kernel version 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 4.3.5a released Sep-2024
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9734 2.20 GHz Processor)

SPECspeed®2017_int_base = 11.6

SPECspeed®2017_int_peak = 11.7

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	224	**259**	**6.84**	260	6.83	259	6.84	1	**259**	**6.86**	259	6.86	258	6.87
602.gcc_s	224	351	11.4	**350**	**11.4**	349	11.4	1	**349**	**11.4**	348	11.4	349	11.4
605.mcf_s	224	**241**	**19.5**	242	19.5	241	19.6	1	236	20.0	236	20.0	**236**	**20.0**
620.omnetpp_s	224	**246**	**6.63**	249	6.56	246	6.64	1	253	6.46	**244**	**6.69**	243	6.71
623.xalancbmk_s	224	**88.6**	**16.0**	88.7	16.0	88.3	16.0	1	80.3	17.6	80.6	17.6	**80.5**	**17.6**
625.x264_s	224	96.3	18.3	**96.4**	**18.3**	96.4	18.3	1	**96.2**	**18.3**	96.2	18.3	96.2	18.3
631.deepsjeng_s	224	**226**	**6.33**	226	6.33	227	6.32	224	**226**	**6.33**	226	6.33	227	6.32
641.leela_s	224	**361**	**4.73**	361	4.72	361	4.73	1	360	4.75	359	4.75	**359**	**4.75**
648.exchange2_s	224	138	21.2	**138**	**21.2**	138	21.3	1	138	21.3	138	21.3	**138**	**21.3**
657.xz_s	224	269	23.0	**269**	**23.0**	268	23.1	224	269	23.0	268	23.1	**268**	**23.0**

SPECspeed®2017_int_base = 11.6

SPECspeed®2017_int_peak = 11.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-223"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "224"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-223"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
SMT Mode set to Disabled
NUMA nodes per socket set to NPS1
Determinism Slider set to Power
```

(Continued on next page)

Platform Notes (Continued)

```
DF C-States set to Disabled


 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Jan 28 22:55:11 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    22:55:11 up 7 min,  2 users,  load average: 0.27, 0.06, 0.02
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                22:54   31.00s  1.53s  0.16s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 6191068
   max locked memory       (kbytes, -l) 2097152
   max memory size         (kbytes, -m) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 6191068
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 python3 ./run_amd_speed_aocc500_znver5_A1.py -b intspeed
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9734 112-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 2
    microcode       : 0xaa00215
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
    cpu cores       : 112
    siblings        : 112
    2 physical ids (chips)
    224 processors (hardware threads)
    physical id 0: core ids
    0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
    240-246
    physical id 1: core ids
    0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
    240-246
    physical id 0: apicids
    0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
    240-246
    physical id 1: apicids
    256-262,272-278,288-294,304-310,320-326,336-342,352-358,368-374,384-390,400-406,416-422,432-438,448-454,4
    64-470,480-486,496-502
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
Byte Order:                          Little Endian
CPU(s):                              224
On-line CPU(s) list:                 0-223
Vendor ID:                           AuthenticAMD
BIOS Vendor ID:                      Advanced Micro Devices, Inc.
Model name:                          AMD EPYC 9734 112-Core Processor
BIOS Model name:                     AMD EPYC 9734 112-Core Processor             Unknown CPU @ 2.2GHz
BIOS CPU family:                     107
CPU family:                          25
Model:                               160
Thread(s) per core:                  1
Core(s) per socket:                  112
Socket(s):                           2
Stepping:                            2
Frequency boost:                     enabled
CPU(s) scaling MHz:                  75%
CPU max MHz:                         2999.2180
CPU min MHz:                         1500.0000
BogoMIPS:                            4393.48
Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                     pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                     rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                     extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                     sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                     cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                     perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                     ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                     erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                     clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                     xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                     user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                     amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                                     flushbyasid decodeassists pausefilter pfthreshold avic
                                     v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                                     ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                     avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                                     debug_swap
Virtualization:                      AMD-V
L1d cache:                           7 MiB (224 instances)
L1i cache:                           7 MiB (224 instances)
L2 cache:                            224 MiB (224 instances)
L3 cache:                            512 MiB (32 instances)
NUMA node(s):                        4
NUMA node0 CPU(s):                   0-55
NUMA node1 CPU(s):                   56-111
NUMA node2 CPU(s):                   112-167
NUMA node3 CPU(s):                   168-223
Vulnerability Gather data sampling:  Not affected
Vulnerability Itlb multihit:         Not affected
Vulnerability L1tf:                  Not affected
Vulnerability Mds:                   Not affected
Vulnerability Meltdown:              Not affected
Vulnerability Mmio stale data:       Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:              Not affected
Vulnerability Spec rstack overflow:  Mitigation; Safe RET
Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
```

(Continued on next page)

Platform Notes (Continued)

```
                                    disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       7M    8 Data            1    64        1             64
     L1i       32K       7M    8 Instruction     1    64        1             64
     L2         1M     224M    8 Unified         2  2048        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-55
  node 0 size: 386754 MB
  node 0 free: 385910 MB
  node 1 cpus: 56-111
  node 1 size: 387018 MB
  node 1 free: 386288 MB
  node 2 cpus: 112-167
  node 2 size: 387057 MB
  node 2 free: 386082 MB
  node 3 cpus: 168-223
  node 3 size: 386963 MB
  node 3 free: 386242 MB
  node distances:
  node   0   1   2   3
    0:  10  12  32  32
    1:  12  10  32  32
    2:  32  32  10  12
    3:  32  32  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584940692 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jan 28 22:47

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
                   issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
                   virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon
                   hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
                   kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
```

(Continued on next page)

Platform Notes (Continued)

```
                  nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
                  snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures
                  systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtlockd virtlogd
                  virtnetworkd virtnodedevd virtnwfilterd virtsecretd virtstoraged
  indirect        pcscd systemd-userdbd tftp wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=5d106d92-ac35-417e-b9aa-58e20fc2854f
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 28:
    current policy: frequency should be within 1.50 GHz and 2.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  371G   11G  356G   3% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Cisco Systems Inc
    Product:        UCSX-215C-M8
    Serial:         FCH282172B4

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    15x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800
    2x 0xCE00 M321R8GA0PB0-CWMJH 64 GB 2 rank 5600, configured at 4800
    7x 0xCE00 M321R8GA0PB0-CWMKJ 64 GB 2 rank 5600, configured at 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Cisco Systems, Inc.
   BIOS Version:      X215M8.4.3.5a.0.0904241153
   BIOS Date:         09/04/2024
   BIOS Revision:     5.27
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

602.gcc_s: Same as 600.perlbench_s

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp`
`-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3`
`-mllvm -unroll-threshold=100 -zopt`
`-fvirtual-function-elimination -fvisibility=hidden`
`-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang`

623.xalancbmk_s: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast`
`-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp`
`-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3`
`-mllvm -unroll-threshold=100 -zopt`
`-fvirtual-function-elimination -fvisibility=hidden`
`-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp`
`-lamdlibm -lamdalloc-ext -lflang`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp`
`-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3`
`-mllvm -unroll-threshold=100 -zopt`
`-fvirtual-function-elimination -fvisibility=hidden`
`-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

Fortran benchmarks:
`-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4`
`-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM`
`-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost`
`-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp`
`-lomp -lamdlibm -lamdalloc -lflang`

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc500-flags.html`
`http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc500-flags.xml`
`http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-28 22:55:11-0500.
Report generated on 2025-02-25 19:07:27 by CPU2017 PS formatter v6716.
Originally published on 2025-02-25.