



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

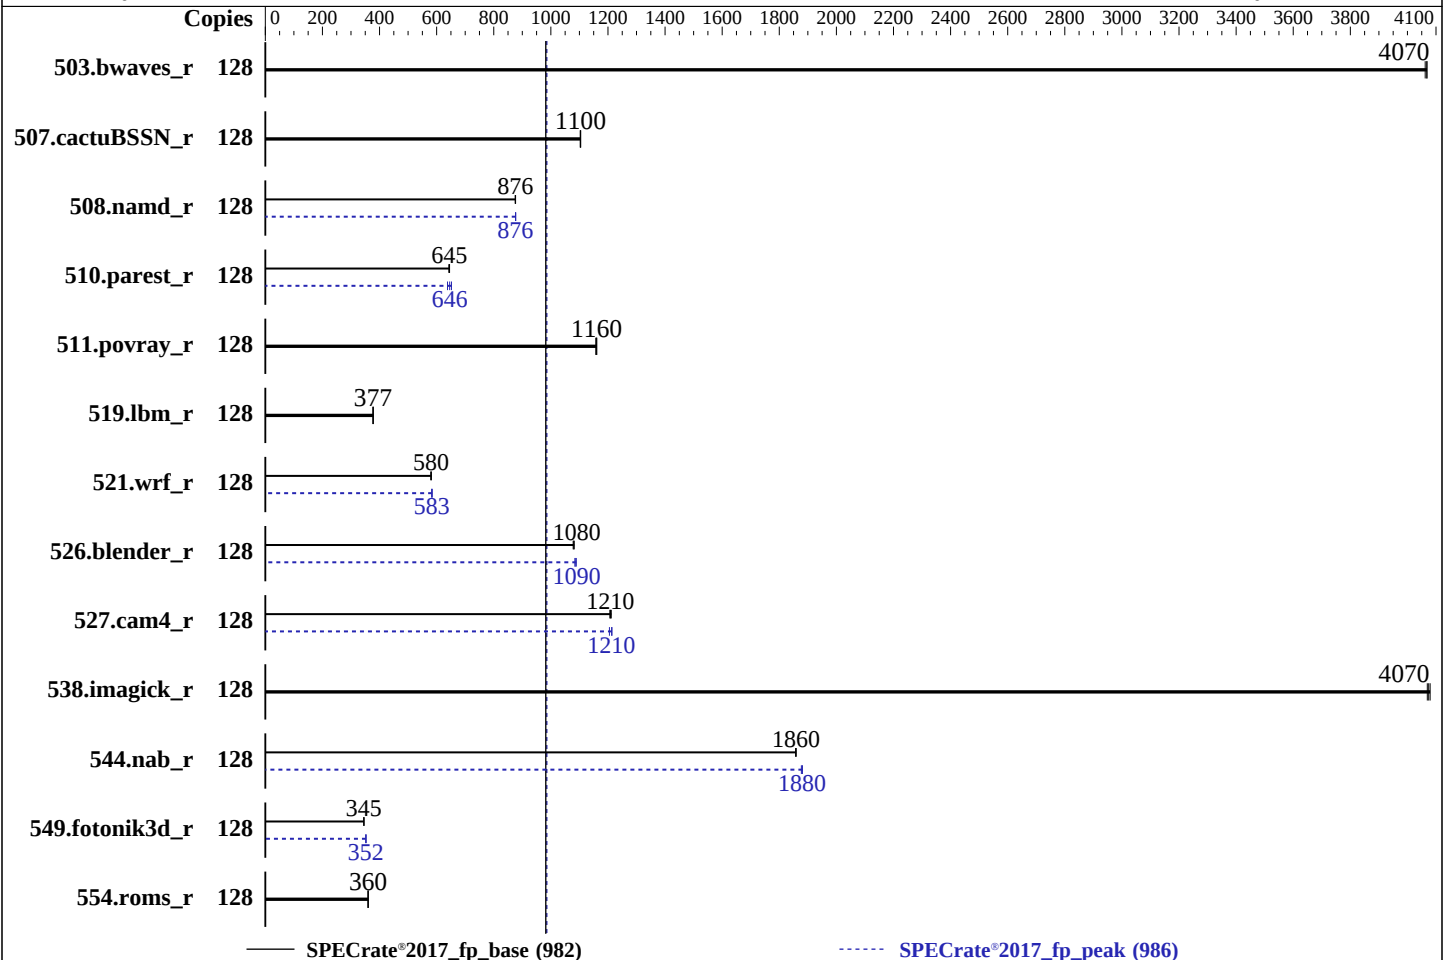

Hardware

CPU Name: AMD EPYC 9745
Max MHz: 3700
Nominal: 2400
Enabled: 128 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 16 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R,
running at 6000)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v2.20 10/31/2024 released
Oct-2024
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at
the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	316	4070	316	4060	316	4070	128	316	4070	316	4060	316	4070
507.cactuBSSN_r	128	147	1100	147	1100	147	1100	128	147	1100	147	1100	147	1100
508.namd_r	128	139	876	139	876	139	875	128	139	876	139	877	139	876
510.parest_r	128	519	645	521	643	519	645	128	514	652	525	638	519	646
511.povray_r	128	258	1160	258	1160	258	1160	128	258	1160	258	1160	258	1160
519.lbm_r	128	357	378	358	377	358	377	128	357	378	358	377	358	377
521.wrf_r	128	493	582	495	580	494	580	128	492	583	491	584	492	583
526.blender_r	128	181	1080	180	1080	180	1080	128	180	1090	180	1080	179	1090
527.cam4_r	128	185	1210	185	1210	186	1210	128	184	1210	186	1210	185	1210
538.imagick_r	128	78.1	4070	78.2	4070	78.0	4080	128	78.1	4070	78.2	4070	78.0	4080
544.nab_r	128	116	1860	116	1860	116	1860	128	115	1880	115	1880	115	1880
549.fotonik3d_r	128	1445	345	1445	345	1445	345	128	1415	352	1416	352	1416	352
554.roms_r	128	565	360	565	360	565	360	128	565	360	565	360	565	360

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Maximum Cooling

AMD SMT Option set to Disabled

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Jan 28 02:23:09 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:23:09 up 6 min,  2 users,  load average: 1.21, 1.91, 1.19
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      pts/0    172.17.1.114  22Apr24  21.00s  0.87s  0.06s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094526
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 3094526
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_fprate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9745 128-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb101025
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 128
siblings        : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-127
physical id 0: apicids 0-127
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            128
On-line CPU(s) list: 0-127
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9745 128-Core Processor
BIOS Model name:   AMD EPYC 9745 128-Core Processor
BIOS CPU family:   107
CPU family:        26
Model:             17
Thread(s) per core: 1
Core(s) per socket: 128
Socket(s):         1
Stepping:          0
Frequency boost:    enabled
CPU(s) scaling MHz: 103%
CPU max MHz:       2400.0000
CPU min MHz:       1500.0000
BogoMIPS:          4792.31
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                  osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                  perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

ibrs ibpb stibp ibrs_enhanced vmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_lld debug_swap

Virtualization:

L1d cache:
L1i cache:
L2 cache:
L3 cache:
NUMA node(s):

NUMA node0 CPU(s):
NUMA node1 CPU(s):
NUMA node2 CPU(s):
NUMA node3 CPU(s):
NUMA node4 CPU(s):
NUMA node5 CPU(s):
NUMA node6 CPU(s):
NUMA node7 CPU(s):

Vulnerability Gather data sampling:
Vulnerability Itlb multihit:
Vulnerability L1tf:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Mmio stale data:
Vulnerability Reg file data sampling:
Vulnerability Retbleed:
Vulnerability Spec rstack overflow:
Vulnerability Spec store bypass:
Vulnerability Spectre v1:
Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

AMD-V

6 MiB (128 instances)
4 MiB (128 instances)
128 MiB (128 instances)
256 MiB (8 instances)

8

0-15

16-31

32-47

48-63

64-79

80-95

96-111

112-127

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-15

node 0 size: 96448 MB

node 0 free: 96109 MB

node 1 cpus: 16-31

node 1 size: 96763 MB

node 1 free: 96503 MB

node 2 cpus: 32-47

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 2 size: 96763 MB
node 2 free: 96481 MB
node 3 cpus: 48-63
node 3 size: 96763 MB
node 3 free: 96521 MB
node 4 cpus: 64-79
node 4 size: 96763 MB
node 4 free: 96527 MB
node 5 cpus: 80-95
node 5 size: 96725 MB
node 5 free: 96431 MB
node 6 cpus: 96-111
node 6 size: 96763 MB
node 6 free: 96452 MB
node 7 cpus: 112-127
node 7 size: 96664 MB
node 7 free: 96357 MB
node distances:
```

```
node  0  1  2  3  4  5  6  7
0:  10  11  12  12  12  12  12  12
1:  11  10  12  12  12  12  12  12
2:  12  12  10  11  12  12  12  12
3:  12  12  11  10  12  12  12  12
4:  12  12  12  12  10  11  12  12
5:  12  12  12  12  12  11  10  12  12
6:  12  12  12  12  12  12  10  11
7:  12  12  12  12  12  12  11  10
```

9. /proc/meminfo

MemTotal: 792224088 kB

10. who -r

run-level 3 Apr 22 17:30

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd chronyd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	blk-availability boot-sysctl ca-certificates chrony-wait console-getty debug-shell grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
indirect	pcscd systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=04efbdca-1d19-4013-beec-bea4f709b7ae
splash=silent
mitigations=auto

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 100:

current policy: frequency should be within 1.50 GHz and 2.40 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/cpu2017

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	445G	27G	415G	6%	/home

20. /sys/devices/virtual/dmi/id

Vendor: HPE

Product: ProLiant DL345 Gen11

Product Family: ProLiant

Serial: DL345G11-002

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE

BIOS Version: 2.20

BIOS Date: 10/31/2024

BIOS Revision: 2.20

Firmware Revision: 1.63

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=2000000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

526.blender_r (continued):

```
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.3.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 982

SPECrate®2017_fp_peak = 986

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Jan-2025

Software Availability: Oct-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-27 15:53:09-0500.

Report generated on 2025-03-12 10:25:51 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.