



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

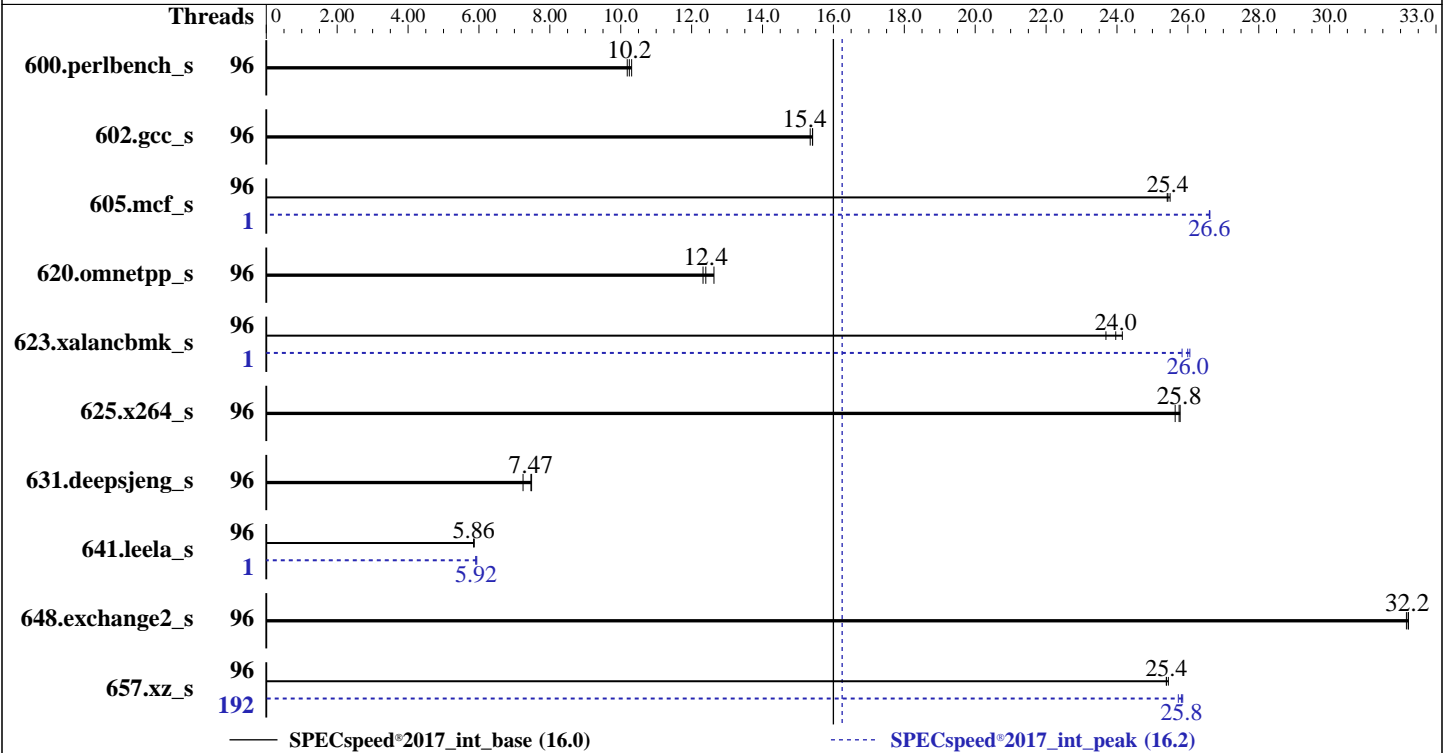

### Hardware

CPU Name: AMD EPYC 9645  
 Max MHz: 3700  
 Nominal: 2300  
 Enabled: 96 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 12 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)  
 Storage: 1 x 960 GB M.2 SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
 Kernel 5.14.0-427.13.1.el9\_4.x86\_64  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version GPE113I 4.10 released Dec-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	<b>173</b>	<b>10.2</b>	174	10.2	172	10.3	96	<b>173</b>	<b>10.2</b>	174	10.2	172	10.3
602.gcc_s	96	<b>258</b>	<b>15.4</b>	259	15.3	258	15.4	96	<b>258</b>	<b>15.4</b>	259	15.3	258	15.4
605.mcf_s	96	186	25.4	<b>186</b>	<b>25.4</b>	185	25.5	1	177	26.6	<b>177</b>	<b>26.6</b>	177	26.6
620.omnetpp_s	96	129	12.6	132	12.3	<b>132</b>	<b>12.4</b>	96	129	12.6	132	12.3	<b>132</b>	<b>12.4</b>
623.xalancbmk_s	96	59.8	23.7	<b>59.1</b>	<b>24.0</b>	58.7	24.2	1	54.4	26.1	54.8	25.8	<b>54.5</b>	<b>26.0</b>
625.x264_s	96	68.4	25.8	<b>68.5</b>	<b>25.8</b>	68.8	25.6	96	68.4	25.8	<b>68.5</b>	<b>25.8</b>	68.8	25.6
631.deepsjeng_s	96	198	7.24	191	7.48	<b>192</b>	<b>7.47</b>	96	198	7.24	191	7.48	<b>192</b>	<b>7.47</b>
641.leela_s	96	292	5.85	291	5.86	<b>291</b>	<b>5.86</b>	1	<b>288</b>	<b>5.92</b>	287	5.94	289	5.91
648.exchange2_s	96	91.2	32.2	<b>91.3</b>	<b>32.2</b>	91.4	32.2	96	91.2	32.2	<b>91.3</b>	<b>32.2</b>	91.4	32.2
657.xz_s	96	243	25.4	243	25.4	<b>243</b>	<b>25.4</b>	192	239	25.9	<b>239</b>	<b>25.8</b>	240	25.7

SPECspeed®2017\_int\_base = **16.0**

SPECspeed®2017\_int\_peak = **16.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

### Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

cpupower set to performance mode  
cpupower frequency-set -r -g performance  
To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-191"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "192"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-191"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA Nodes per Socket set to NPS2

P-State set to Enabled

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Mon Mar 18 08:03:33 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.e19_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.e19_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 08:03:33 up 3 min,  0 users,  load average: 0.27, 0.11, 0.04
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 1545802
max locked memory            (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 1545802
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.033/templogs/preenv.intspeerd.033.0.log --lognum 033.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9645 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101025
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 96
siblings       : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 0: apicids 0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9645 96-Core Processor
BIOS Model name:      AMD EPYC 9645 96-Core Processor
CPU family:            26
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             1
Stepping:              0
Frequency boost:       enabled
CPU(s) scaling MHz:   100%
CPU max MHz:           2300.0000
CPU min MHz:           1500.0000
BogoMIPS:              4592.75
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb  
cat\_l3 cdp\_l3 hw\_pstate ssbd mba perfmon\_v2 ibrs ibpb stibp  
ibrs\_enhanced vmmcall fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms  
invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma  
clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec  
xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local  
avx\_vnni avx512\_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin  
cппc arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid  
decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif x2avic  
v\_spec\_ctrl vnmi avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes  
vpclmulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid  
bus\_lock\_detect movdiri movdir64b overflow\_recov succor smca fsmr  
avx512\_vp2intersect flush\_lld debug\_swap

Virtualization:

L1d cache: 4.5 MiB (96 instances)

L1i cache: 3 MiB (96 instances)

L2 cache: 96 MiB (96 instances)

L3 cache: 256 MiB (8 instances)

NUMA node(s): 2

NUMA node0 CPU(s): 0-47,96-143

NUMA node1 CPU(s): 48-95,144-191

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP

always-on, RSB filling, PBR SB-eIBRS Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-47,96-143

node 0 size: 193052 MB

node 0 free: 191552 MB

node 1 cpus: 48-95,144-191

node 1 size: 193437 MB

node 1 free: 192308 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

MemTotal: 395765484 kB

-----  
10. who -r  
run-level 3 Mar 18 08:00

-----  
11. Systemd service manager version: systemd 252 (252-32.el9\_4)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond  
dbus-broker getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor  
microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon  
selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2  
upower  
enabled-runtime systemd-remount-fs  
disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot  
chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade  
firewalld kvm\_stat man-db-restart-cache-update nftables nvmmf-autoconnect pesign rdisc rhcd  
rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@  
systemd-boot-check-no-failures systemd-pstore systemd-sysext  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate  
systemd-sysupdate-reboot

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd3,gpt2)/boot/vmlinuz-5.14.0-427.13.1.el9\_4.x86\_64  
root=UUID=609e1264-f568-475c-b502-9e0795850886  
ro  
resume=UUID=7f8ee8bf-b24d-4aea-9bd8-e670d4778be8

-----  
14. cpupower frequency-info  
analyzing CPU 129:  
current policy: frequency should be within 1.50 GHz and 2.30 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 40800MHz

-----  
15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p4 xfs 820G 38G 782G 5% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SD535 V3
Product Family: ThinkSystem
Serial:      1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
12x Samsung M321R4GA3PB2-CCPEC 32 GB 2 rank 6400, configured at 6000

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

BIOS Vendor: Lenovo  
BIOS Version: GPE113I-4.10  
BIOS Date: 12/12/2024  
BIOS Revision: 4.10  
Firmware Revision: 5.10

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 16.0

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

### C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-DSPEC\_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 16.0

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_peak = 16.2

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

605.mcf\_s (continued):

-lamdlibm -lamdalloc -lflang

625.x264\_s: basepeak = yes

657.xz\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-DSPEC\_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=100 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp

-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=100 -zopt

-fvirtual-function-elimination -fvisibility=hidden

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD535 V3  
(2.30 GHz, AMD EPYC 9645)

SPECspeed®2017\_int\_base = 16.0

SPECspeed®2017\_int\_peak = 16.2

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-17 20:03:33-0400.

Report generated on 2025-03-12 10:27:37 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.