



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

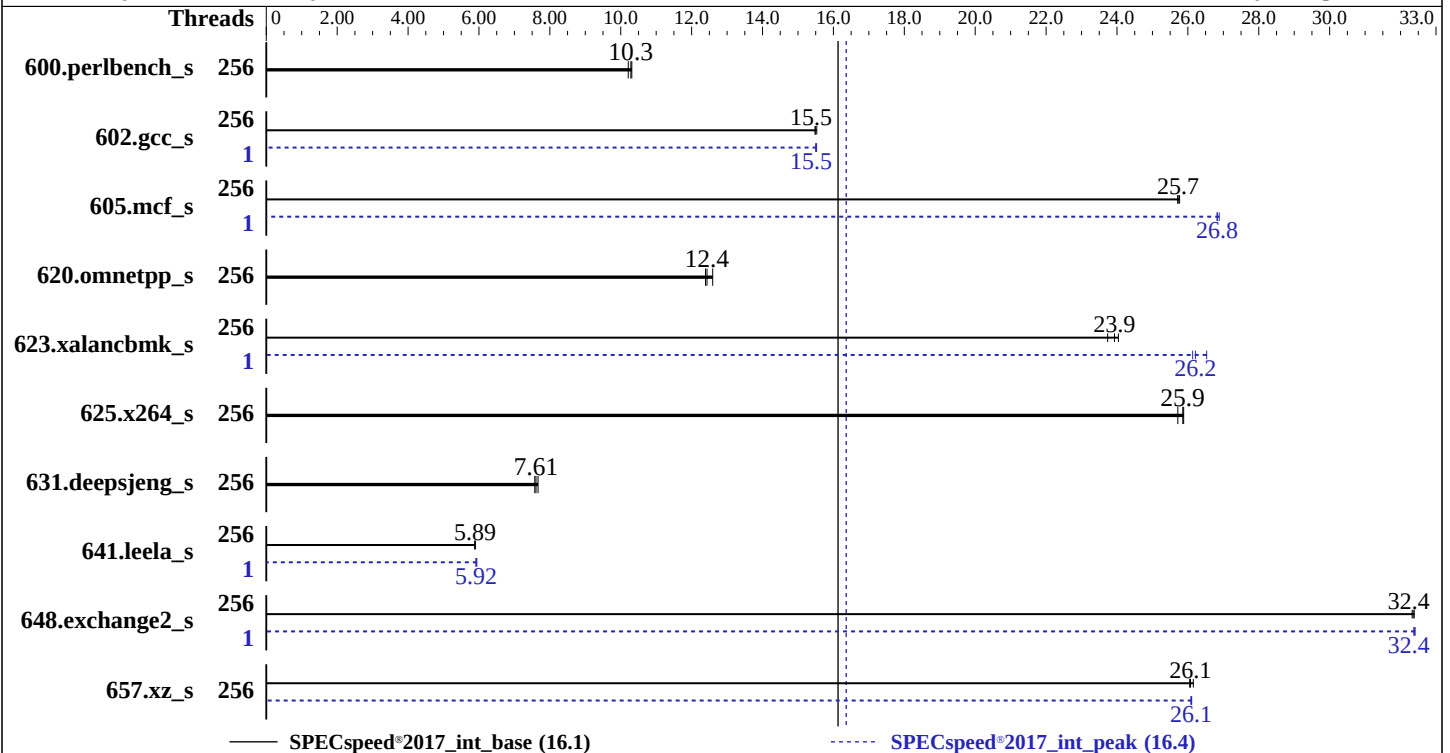

### Hardware

CPU Name: AMD EPYC 9745  
Max MHz: 3700  
Nominal: 2400  
Enabled: 256 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 32 MB shared / 16 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
Storage: 1 x 960 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
kernel version 6.4.0-150600.21-default  
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 4.3.5c released Dec-2024  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Results Table

| Benchmark       | Base    |                    |                    |                    |                    |                   |                    | Peak    |                    |                    |                   |                    |                    |                    |
|-----------------|---------|--------------------|--------------------|--------------------|--------------------|-------------------|--------------------|---------|--------------------|--------------------|-------------------|--------------------|--------------------|--------------------|
|                 | Threads | Seconds            | Ratio              | Seconds            | Ratio              | Seconds           | Ratio              | Threads | Seconds            | Ratio              | Seconds           | Ratio              | Seconds            | Ratio              |
| 600.perlbench_s | 256     | 174                | 10.2               | <b><u>173</u></b>  | <b><u>10.3</u></b> | 172               | 10.3               | 256     | 174                | 10.2               | <b><u>173</u></b> | <b><u>10.3</u></b> | 172                | 10.3               |
| 602.gcc_s       | 256     | <b><u>257</u></b>  | <b><u>15.5</u></b> | 256                | 15.5               | 257               | 15.5               | 1       | 257                | 15.5               | <b><u>257</u></b> | <b><u>15.5</u></b> | 256                | 15.5               |
| 605.mcf_s       | 256     | 183                | 25.8               | <b><u>184</u></b>  | <b><u>25.7</u></b> | 184               | 25.7               | 1       | <b><u>176</u></b>  | <b><u>26.8</u></b> | 176               | 26.9               | 176                | 26.8               |
| 620.omnetpp_s   | 256     | <b><u>131</u></b>  | <b><u>12.4</u></b> | 132                | 12.4               | 129               | 12.6               | 256     | <b><u>131</u></b>  | <b><u>12.4</u></b> | 132               | 12.4               | 129                | 12.6               |
| 623.xalanchmk_s | 256     | <b><u>59.2</u></b> | <b><u>23.9</u></b> | 59.7               | 23.7               | 58.9              | 24.0               | 1       | <b><u>54.1</u></b> | <b><u>26.2</u></b> | 53.4              | 26.5               | 54.2               | 26.1               |
| 625.x264_s      | 256     | <b><u>68.2</u></b> | <b><u>25.9</u></b> | 68.6               | 25.7               | 68.2              | 25.9               | 256     | <b><u>68.2</u></b> | <b><u>25.9</u></b> | 68.6              | 25.7               | 68.2               | 25.9               |
| 631.deepsjeng_s | 256     | 189                | 7.57               | 187                | 7.67               | <b><u>188</u></b> | <b><u>7.61</u></b> | 256     | 189                | 7.57               | 187               | 7.67               | <b><u>188</u></b>  | <b><u>7.61</u></b> |
| 641.leela_s     | 256     | 290                | 5.88               | <b><u>289</u></b>  | <b><u>5.89</u></b> | 289               | 5.90               | 1       | <b><u>288</u></b>  | <b><u>5.92</u></b> | 287               | 5.94               | 288                | 5.91               |
| 648.exchange2_s | 256     | 90.8               | 32.4               | <b><u>90.9</u></b> | <b><u>32.4</u></b> | 90.9              | 32.3               | 1       | 90.8               | 32.4               | 90.7              | 32.4               | <b><u>90.7</u></b> | <b><u>32.4</u></b> |
| 657.xz_s        | 256     | 236                | 26.2               | <b><u>237</u></b>  | <b><u>26.1</u></b> | 237               | 26.1               | 256     | <b><u>237</u></b>  | <b><u>26.1</u></b> | 237               | 26.1               | 237                | 26.1               |

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-255"

LD\_LIBRARY\_PATH =

"/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "256"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-255"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings:

SMT Mode set to Disabled

NUMA nodes per socket set to NPS1

Determinism Slider set to Power

DF C-States set to Disabled

Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun May 4 20:34:19 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:34:19 up 1 min,  3 users,  load average: 0.37, 0.13, 0.04
USER   TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
root   tty1      -                20:33    27.00s  0.94s  0.08s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6190328
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190328
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py -b intspeak
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeak
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeak.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9745 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101025
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 128
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-127
physical id 1: apicids 128-255
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      256
On-line CPU(s) list:         0-255
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9745 128-Core Processor
BIOS Model name:             AMD EPYC 9745 128-Core Processor
BIOS CPU family:             107
CPU family:                  26
Model:                      17
Thread(s) per core:          1
Core(s) per socket:          128
Socket(s):                   2
Stepping:                    0
Frequency boost:              enabled
CPU(s) scaling MHz:          66%
CPU max MHz:                  3707.8120

Unknown CPU @ 2.4GHz
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Platform Notes (Continued)

CPU min MHz: 1500.0000  
BogoMIPS: 4792.69  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat  
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb  
rdtscp lm constant\_tsc rep\_good amd\_lbr\_v2 nopl nonstop\_tsc cpuid  
extd\_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid  
sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm  
cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch  
osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpeext  
perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 hw\_pstate ssbd mba perfmon\_v2  
ibrs ibpb stibp ibrs\_enhanced vmmcall fsgsbase tsc\_adjust bmi1 avx2  
smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt  
xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf  
xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi  
avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_l1d debug\_swap  
AMD-V  
L1d cache: 12 MiB (256 instances)  
L1i cache: 8 MiB (256 instances)  
L2 cache: 256 MiB (256 instances)  
L3 cache: 512 MiB (16 instances)  
NUMA node(s): 2  
NUMA node0 CPU(s): 0-127  
NUMA node1 CPU(s): 128-255  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP  
disabled; RSB filling; PBRB-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 12M      | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 8M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 256M     | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 512M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0-127  
node 0 size: 773652 MB  
node 0 free: 772014 MB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
node 1 cpus: 128-255
node 1 size: 773956 MB
node 1 free: 773478 MB
node distances:
node   0   1
  0:  10  32
  1:  32  10
```

```
-----
9. /proc/meminfo
   MemTotal:      1584751176 kB
```

```
-----
10. who -r
    run-level 3 May 4 20:33
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE      UNIT FILES
    enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
               issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
               smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
               wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled    autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
               chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
               firewallld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon
               hwloc-dump-hwdata ipmi ipmiev d iscsi-init iscsid issue-add-ssh-keys kexec-load ksm
               kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
               nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
               snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures
               systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
               systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtlockd virtlogd
               virtnetworkd virtnodedevd virtnwfilterd virtsecret d virtstoraged
    indirect    pcsd systemd-userdbd tftp wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
    root=UUID=c83597cb-e37b-43a6-bd1c-58cd7f1f9316
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
```

```
-----
14. cpupower frequency-info
    analyzing CPU 107:
        current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

### 15. sysctl

|                              |       |
|------------------------------|-------|
| kernel.numa_balancing        | 1     |
| kernel.randomize_va_space    | 0     |
| vm.compaction_proactiveness  | 20    |
| vm.dirty_background_bytes    | 0     |
| vm.dirty_background_ratio    | 10    |
| vm.dirty_bytes               | 0     |
| vm.dirty_expire_centisecs    | 3000  |
| vm.dirty_ratio               | 8     |
| vm.dirty_writeback_centisecs | 500   |
| vm.dirtytime_expire_seconds  | 43200 |
| vm.extfrag_threshold         | 500   |
| vm.min_unmapped_ratio        | 1     |
| vm.nr_hugepages              | 0     |
| vm.nr_hugepages_mempolicy    | 0     |
| vm.nr_overcommit_hugepages   | 0     |
| vm.swappiness                | 1     |
| vm.watermark_boost_factor    | 15000 |
| vm.watermark_scale_factor    | 10    |
| vm.zone_reclaim_mode         | 1     |

### 16. /sys/kernel/mm/transparent\_hugepage

|                |                                              |
|----------------|----------------------------------------------|
| defrag         | [always] defer defer+madvise madvise never   |
| enabled        | [always] madvise never                       |
| hpage_pmd_size | 2097152                                      |
| shmem_enabled  | always within_size advise [never] deny force |

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

|                       |       |
|-----------------------|-------|
| alloc_sleep_millisecs | 60000 |
| defrag                | 1     |
| max_ptes_none         | 511   |
| max_ptes_shared       | 256   |
| max_ptes_swap         | 64    |
| pages_to_scan         | 4096  |
| scan_sleep_millisecs  | 10000 |

### 18. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

### 19. Disk information

SPEC is set to: /home/cpu2017

| Filesystem | Type  | Size | Used | Avail | Use% | Mounted on |
|------------|-------|------|------|-------|------|------------|
| /dev/sda2  | btrfs | 224G | 9.0G | 211G  | 5%   | /home      |

### 20. /sys/devices/virtual/dmi/id

|                 |                       |
|-----------------|-----------------------|
| Vendor:         | Cisco Systems Inc     |
| Product:        | UCSC-C245-M8SX        |
| Product Family: | Cisco UCS Rack Server |
| Serial:         | WZP2750Z0CS           |

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

22x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 6000  
1x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000  
1x 0xCE00 M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C245M8.4.3.5c.0.1202241033  
BIOS Date: 12/02/2024  
BIOS Revision: 5.35

## Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
      | 657.xz_s(base, peak)  
=====
```

```
=====  
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
      | 641.leela_s(base, peak)  
=====
```

```
=====  
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

```
=====  
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP  
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm  
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flt0 -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Peak Optimization Flags (Continued)

600.perlbench\_s: basepeak = yes

602.gcc\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

625.x264\_s: basepeak = yes

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C245 M8 (AMD EPYC 9745  
2.40 GHz Processor)

SPECspeed®2017\_int\_base = 16.1

SPECspeed®2017\_int\_peak = 16.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

641.leela\_s (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-iv-split -Wl, -mllvm -Wl, -inline-recursion=4  
-Wl, -mllvm -Wl, -lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-04 20:34:18-0400.

Report generated on 2025-06-03 15:47:09 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.