



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR, AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

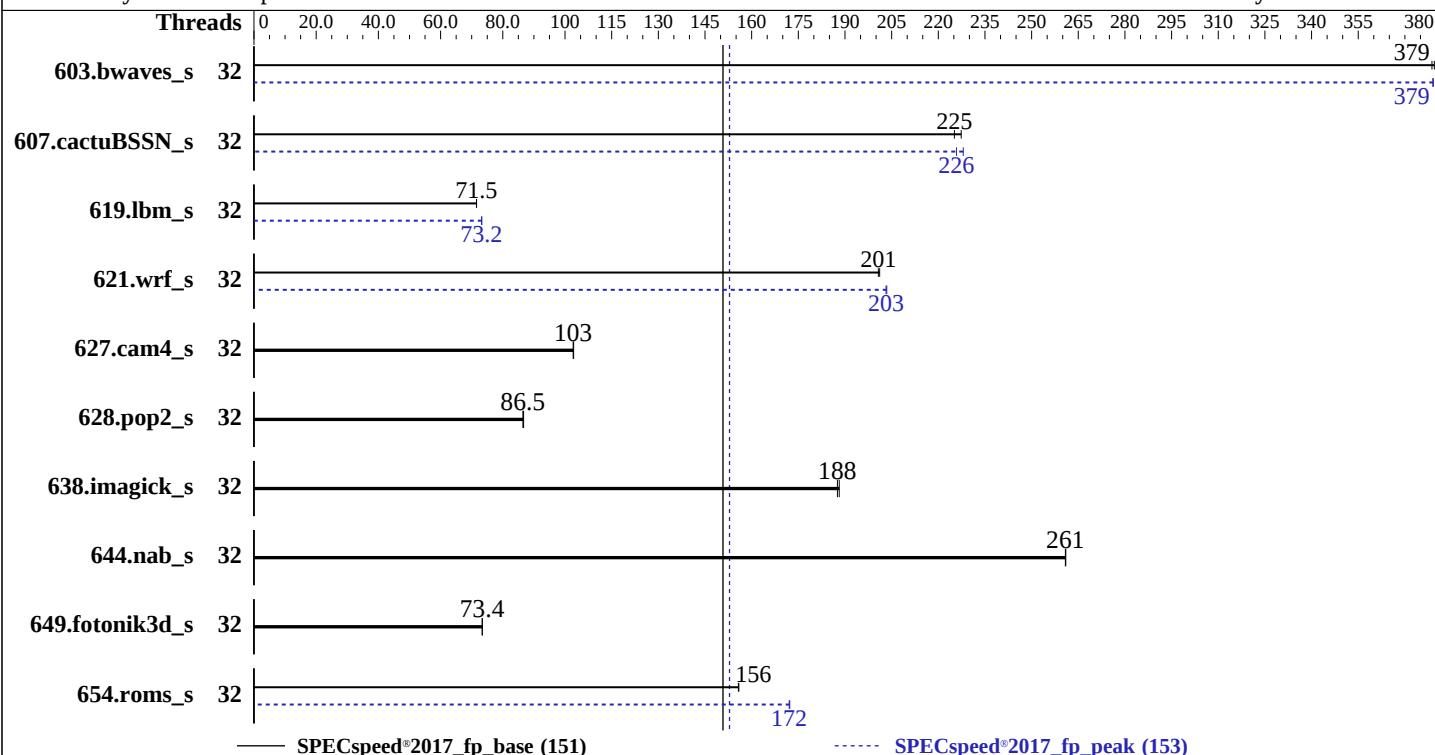

Hardware

CPU Name: AMD EPYC 7543
Max MHz: 3700
Nominal: 2800
Enabled: 32 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 3.8 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.2 LTS
Kernel 6.8.0-57-generic
Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
Parallel: Yes
Firmware: Version 3.0 released Jul-2024
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc: jemalloc memory allocator library v5.1.0
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	155	379	<u>156</u>	<u>379</u>			32	<u>156</u>	<u>379</u>	156	379		
607.cactuBSSN_s	32	<u>74.0</u>	<u>225</u>	73.3	227			32	<u>73.8</u>	<u>226</u>	73.1	228		
619.lbm_s	32	<u>73.2</u>	<u>71.5</u>	73.2	71.6			32	71.5	73.2	<u>71.6</u>	<u>73.2</u>		
621.wrf_s	32	65.8	201	<u>65.9</u>	<u>201</u>			32	<u>65.1</u>	<u>203</u>	65.0	203		
627.cam4_s	32	<u>86.4</u>	<u>103</u>	86.2	103			32	<u>86.4</u>	<u>103</u>	86.2	103		
628.pop2_s	32	137	86.7	<u>137</u>	<u>86.5</u>			32	137	86.7	<u>137</u>	<u>86.5</u>		
638.imagick_s	32	76.7	188	<u>76.9</u>	<u>188</u>			32	76.7	188	<u>76.9</u>	<u>188</u>		
644.nab_s	32	<u>67.0</u>	<u>261</u>	66.9	261			32	<u>67.0</u>	<u>261</u>	66.9	261		
649.fotonik3d_s	32	<u>124</u>	<u>73.4</u>	124	73.4			32	<u>124</u>	<u>73.4</u>	124	73.4		
654.roms_s	32	101	156	<u>101</u>	<u>156</u>			32	<u>91.5</u>	<u>172</u>	91.4	172		

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR, AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-31"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "32"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-31"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:

NUMA Nodes Per Socket = NPS4

Determinism Control = Manual

Determinism Slider = Power

cTDP Control = Manual

cTDP = 240

Package Power Limit Control = Manual

Package Power Limit = 240

SMT Control = Disabled

ACPI SRAT L3 cache As NUMA Domain: Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Platform Notes (Continued)

running on asg-1014s-acr12n4h-eu Tue May 6 05:15:43 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.6)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux asg-1014s-acr12n4h-eu 6.8.0-57-generic #59-Ubuntu SMP PREEMPT_DYNAMIC Sat Mar 15 17:40:59 UTC 2025
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
05:15:43 up 2:32, 1 user, load average: 5.48, 5.05, 2.97
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
smc       tty1    -               02:46    2:28m 0.66s  0.61s sudo su -
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      smc
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            1030764
nofiles            1024
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Platform Notes (Continued)

vmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. sysinfo process ancestry

```
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_speed_aocc320_milanx_A1.py
/bin/bash ./amd_speed_aocc320_milanx_A1.sh
runcpu --config amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 fpspeed
runcpu --configfile amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 7543 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 1
stepping        : 1
microcode       : 0xa0011d5
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso ibpb_no_ret
TLB size        : 2560 4K pages
cpu cores       : 32
siblings        : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids 0-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64	
CPU op-mode(s):	32-bit, 64-bit	
Address sizes:	48 bits physical, 48 bits virtual	
Byte Order:	Little Endian	
CPU(s):	32	
On-line CPU(s) list:	0-31	
Vendor ID:	AuthenticAMD	
BIOS Vendor ID:	Advanced Micro Devices, Inc.	
Model name:	AMD EPYC 7543 32-Core Processor	
BIOS Model name:	AMD EPYC 7543 32-Core Processor	Unknown CPU @ 2.8GHz
BIOS CPU family:	107	
CPU family:	25	
Model:	1	
Thread(s) per core:	1	
Core(s) per socket:	32	

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Platform Notes (Continued)

Socket(s): 1
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 75%
CPU max MHz: 3737.8899
CPU min MHz: 1500.0000
BogoMIPS: 5599.48
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin brs arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_omsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca fsrm debug_swap

Virtualization: AMD-V
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 16 MiB (32 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-3
NUMA node1 CPU(s): 4-7
NUMA node2 CPU(s): 8-11
NUMA node3 CPU(s): 12-15
NUMA node4 CPU(s): 16-19
NUMA node5 CPU(s): 20-23
NUMA node6 CPU(s): 24-27
NUMA node7 CPU(s): 28-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines; IBPB conditional; IBRS_FW; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	512K	16M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-3

node 0 size: 32045 MB

node 0 free: 31489 MB

node 1 cpus: 4-7

node 1 size: 32211 MB

node 1 free: 31776 MB

node 2 cpus: 8-11

node 2 size: 32254 MB

node 2 free: 32086 MB

node 3 cpus: 12-15

node 3 size: 32254 MB

node 3 free: 31927 MB

node 4 cpus: 16-19

node 4 size: 32254 MB

node 4 free: 31576 MB

node 5 cpus: 20-23

node 5 size: 32254 MB

node 5 free: 32030 MB

node 6 cpus: 24-27

node 6 size: 32254 MB

node 6 free: 31870 MB

node 7 cpus: 28-31

node 7 size: 32236 MB

node 7 free: 31981 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	11	11	11	11	11	11	11
1:	11	10	11	11	11	11	11	11
2:	11	11	10	11	11	11	11	11
3:	11	11	11	10	11	11	11	11
4:	11	11	11	11	10	11	11	11
5:	11	11	11	11	11	10	11	11
6:	11	11	11	11	11	11	10	11
7:	11	11	11	11	11	11	11	10

9. /proc/meminfo

MemTotal: 263951980 kB

10. who -r

run-level 5 May 6 02:45

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.6)

Default Target	Status
graphical	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
------	------	--------	-----	-------------

* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

Legend: LOAD -> Reflects whether the unit definition was properly loaded.

ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.

SUB -> The low-level unit activation state, values depend on unit type.

1 loaded units listed.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Platform Notes (Continued)

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextd systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uuid
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.8.0-57-generic
root=UUID=9a4f0e9d-db26-406f-b94d-95f7a9b043fa
ro
nomodeset

15. cpupower frequency-info

analyzing CPU 13:
current policy: frequency should be within 1.50 GHz and 2.80 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2800MHZ

16. tuned-adm active

Current active profile: throughput-performance

17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Platform Notes (Continued)

```
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          1
```

```
-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
20. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.2 LTS
-----
```

```
-----
21. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/nvme1n1p2 ext4    3.5T   16G  3.3T   1% /
-----
```

```
-----
22. /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         Super Server
Serial:          0123456789
-----
```

```
-----
23. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Micron Technology 36ASF4G72PZ-3G2R1 32 GB 2 rank 3200
-----
```

```
-----
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     3.0
BIOS Date:        07/29/2024
BIOS Revision:    5.22
-----
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR, AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange  
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1  
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop  
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order  
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false  
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange  
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -Wl, -mllvm -Wl, -function-specialize
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

619.lbm_s (continued):

```
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl, -mllvm -Wl, -enable-X86-prefetching  
-Wl, -mllvm -Wl, -enable-licm-vrp  
-Wl, -mllvm -Wl, -function-specialize  
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-Mrecursive -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang
```

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl, -mllvm -Wl, -enable-X86-prefetching  
-Wl, -mllvm -Wl, -enable-licm-vrp  
-Wl, -mllvm -Wl, -function-specialize  
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive  
-mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop  
-mllvm -enable-loopinterchange  
-mllvm -compute-interchange-order -DSPEC_OPENMP
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

621.wrf_s (continued):

-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.html>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

MegaDC A+ Server ASG-1014S-ACR12N4H
(H12SSW-NTR , AMD EPYC 7543)

SPECspeed®2017_fp_base = 151

SPECspeed®2017_fp_peak = 153

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2025

Hardware Availability: Mar-2021

Software Availability: Mar-2025

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-06 01:15:43-0400.

Report generated on 2025-06-03 15:47:41 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.