SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2970

SPECrate®2017_fp_peak = 3130

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2025
Hardware Availability: Jul-2025
Software Availability: Jun-2024

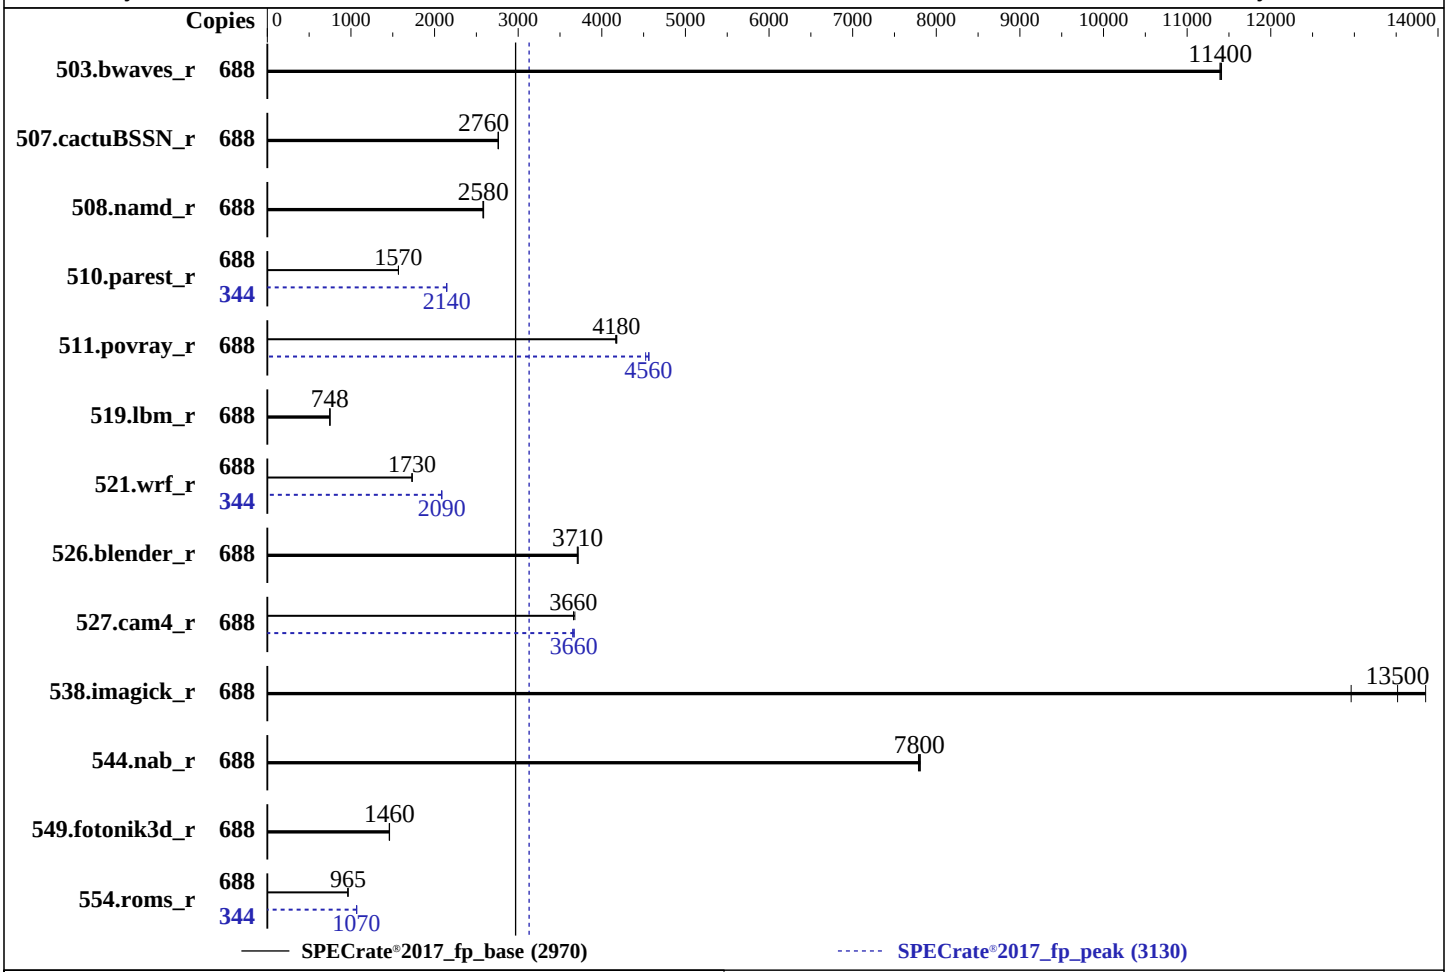

Hardware

CPU Name:	Intel Xeon 6788P
Max MHz:	3800
Nominal:	2000
Enabled:	344 cores, 4 chips, 2 threads/core
Orderable:	1,2,4 Chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 3.2 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	HPE BIOS Version v1.34 04/18/2025 released Apr-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2970

SPECrate®2017_fp_peak = 3130

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2025
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	688	605	11400	605	11400	**605**	**11400**	688	605	11400	605	11400	**605**	**11400**
507.cactuBSSN_r	688	315	2760	316	2760	**315**	**2760**	688	315	2760	316	2760	**315**	**2760**
508.namd_r	688	**253**	**2580**	253	2590	253	2580	688	**253**	**2580**	253	2590	253	2580
510.parest_r	688	1147	1570	1148	1570	**1148**	**1570**	344	420	2140	419	2150	**420**	**2140**
511.povray_r	688	386	4170	**385**	**4180**	384	4180	688	352	4560	**352**	**4560**	355	4520
519.lbm_r	688	**969**	**748**	969	748	969	748	688	**969**	**748**	969	748	969	748
521.wrf_r	688	**890**	**1730**	890	1730	890	1730	344	369	2090	**370**	**2090**	370	2080
526.blender_r	688	282	3720	**282**	**3710**	283	3710	688	282	3720	**282**	**3710**	283	3710
527.cam4_r	688	327	3680	**329**	**3660**	329	3660	688	328	3670	330	3650	**328**	**3660**
538.imagick_r	688	132	13000	**127**	**13500**	124	13900	688	132	13000	**127**	**13500**	124	13900
544.nab_r	688	**148**	**7800**	148	7810	149	7790	688	**148**	**7800**	148	7810	149	7790
549.fotonik3d_r	688	1834	1460	**1835**	**1460**	1839	1460	688	1834	1460	**1835**	**1460**	1839	1460
554.roms_r	688	**1133**	**965**	1136	963	1133	965	344	512	1070	**512**	**1070**	512	1070

SPECrate®2017_fp_base = 2970

SPECrate®2017_fp_peak = 3130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 >       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to virtual-host using "tuned-adm profile virtual-host"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

(Continued on next page)

General Notes (Continued)

```
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Throughput Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
XPT Prefetch set to Disabled
Intel UPI Prefetch set to Disabled
OSB Local/Remote Read set to Auto
Workload Profile set to Custom
 DCU Stream Prefetcher set to Disabled
 Adjacent Sector Prefetch set to Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sat Jun 14 22:35:26 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   22:35:26 up 2 days, 16:43,  3 users,  load average: 0.14, 0.03, 0.01
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    172.17.1.97      Thu12   22.00s  1.12s  0.02s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 8253545
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 65536
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 8253545
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=31
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 -bash
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=688 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=344 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=688 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=344 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6788P
    vendor_id       : GenuineIntel
    cpu family      : 6
```

(Continued on next page)

Platform Notes (Continued)

```
     model           : 173
     stepping        : 1
     microcode       : 0x10003a5
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
     cpu cores       : 86
     siblings        : 172
     4 physical ids (chips)
     688 processors (hardware threads)
     physical id 0: core ids 0-42,64-106
     physical id 1: core ids 0-42,64-106
     physical id 2: core ids 0-42,64-106
     physical id 3: core ids 0-42,64-106
     physical id 0: apicids 0-85,128-213
     physical id 1: apicids 256-341,384-469
     physical id 2: apicids 512-597,640-725
     physical id 3: apicids 768-853,896-981
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        46 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               688
   On-line CPU(s) list:                  0-687
   Vendor ID:                            GenuineIntel
   BIOS Vendor ID:                       Intel(R) Corporation
   Model name:                           Intel(R) Xeon(R) 6788P
   BIOS Model name:                      Intel(R) Xeon(R) 6788P  CPU @ 2.0GHz
   BIOS CPU family:                      179
   CPU family:                           6
   Model:                                173
   Thread(s) per core:                   2
   Core(s) per socket:                   86
   Socket(s):                            4
   Stepping:                             1
   BogoMIPS:                             4000.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                         xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                         3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                         ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                         vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                         rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                         clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                         arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                         vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                         rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                         serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                         amx_int8 flush_l1d arch_capabilities
```

(Continued on next page)

Platform Notes (Continued)

```
  Virtualization:                      VT-x
  L1d cache:                           16.1 MiB (344 instances)
  L1i cache:                           21.5 MiB (344 instances)
  L2 cache:                            688 MiB (344 instances)
  L3 cache:                            1.3 GiB (4 instances)
  NUMA node(s):                        8
  NUMA node0 CPU(s):                   0-42,344-386
  NUMA node1 CPU(s):                   43-85,387-429
  NUMA node2 CPU(s):                   86-128,430-472
  NUMA node3 CPU(s):                   129-171,473-515
  NUMA node4 CPU(s):                   172-214,516-558
  NUMA node5 CPU(s):                   215-257,559-601
  NUMA node6 CPU(s):                   258-300,602-644
  NUMA node7 CPU(s):                   301-343,645-687
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K    16.1M   12 Data            1     64        1             64
     L1i       64K    21.5M   16 Instruction     1     64        1             64
     L2         2M     688M   16 Unified         2   2048        1             64
     L3       336M     1.3G   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-42,344-386
  node 0 size: 257428 MB
  node 0 free: 230219 MB
  node 1 cpus: 43-85,387-429
  node 1 size: 258025 MB
  node 1 free: 233708 MB
  node 2 cpus: 86-128,430-472
  node 2 size: 258025 MB
  node 2 free: 233907 MB
  node 3 cpus: 129-171,473-515
  node 3 size: 258025 MB
  node 3 free: 233796 MB
  node 4 cpus: 172-214,516-558
  node 4 size: 258025 MB
  node 4 free: 233222 MB
  node 5 cpus: 215-257,559-601
  node 5 size: 258025 MB
  node 5 free: 234004 MB
  node 6 cpus: 258-300,602-644
```

(Continued on next page)

Platform Notes (Continued)

```
  node 6 size: 258025 MB
  node 6 free: 233989 MB
  node 7 cpus: 301-343,645-687
  node 7 size: 257830 MB
  node 7 free: 233547 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  21  21  31  31  21  21
    1:  12  10  21  21  31  31  21  21
    2:  21  21  10  12  21  21  31  31
    3:  21  21  12  10  21  21  31  31
    4:  31  31  21  21  10  12  21  21
    5:  31  31  21  21  12  10  21  21
    6:  21  21  31  31  21  21  10  12
    7:  21  21  31  31  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2112932948 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jun 12 05:53

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
                   haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load rpmconfigcheck serial-getty@
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd tuned
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=8768ae42-b33d-4d60-86a6-ea0d3af247df
  splash=silent
  resume=/dev/disk/by-uuid/593e1cfb-89a6-4a54-a92b-64b3ebc471c6
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 164:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. tuned-adm active
  Current active profile: virtual-host

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio          5
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p3 xfs   1.9T  795G  1.2T  42% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        HPE ProLiant Compute DL580 Gen12
    Product Family: ProLiant
    Serial:         7CED2FP014
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400
     3x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
     13x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.34
    BIOS Date:         04/18/2025
    BIOS Revision:     1.34
    Firmware Revision: 1.13
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-14 13:05:26-0400.
Report generated on 2025-07-14 14:34:08 by CPU2017 PS formatter v6716.
Originally published on 2025-07-14.