SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base =	35.0
SPECspeed®2017_fp_energy_base =	201
SPECspeed®2017_fp_peak =	39.1
SPECspeed®2017_fp_energy_peak =	224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

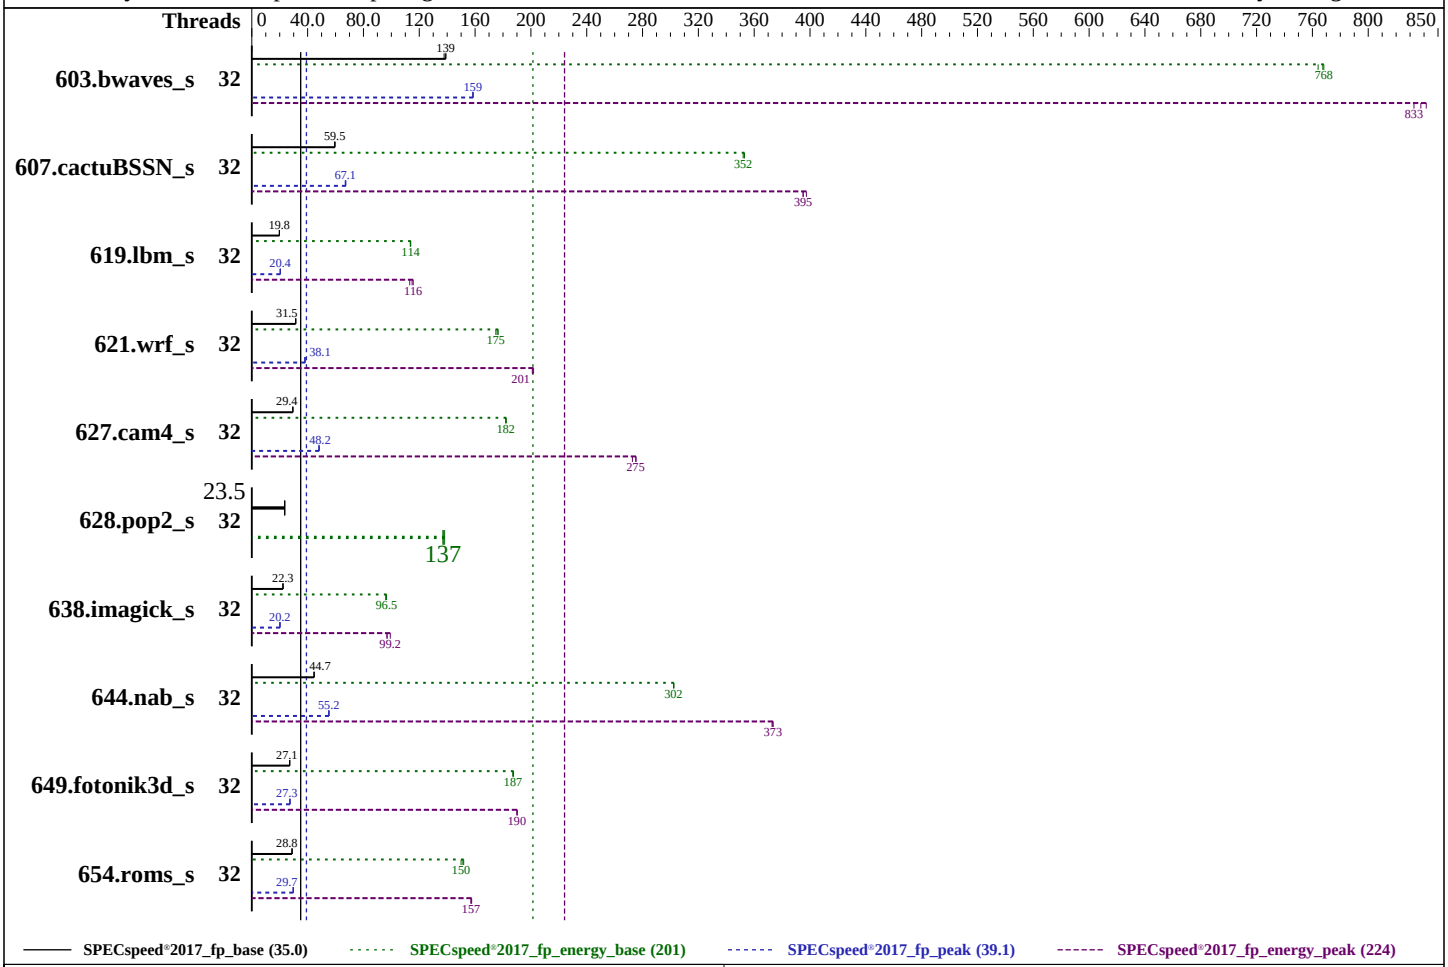

Hardware

CPU Name:	Ampere eMAG 8180
Max MHz:	3300
Nominal:	3000
Enabled:	32 cores, 1 chip
Orderable:	1 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	4 MB I+D on chip per chip (256 KiB shared / 2 cores)
L3:	32 MB I+D on chip per chip
Other:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)
Storage:	1 x 480 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)
Compiler:	C/C++/Fortran: Version 15.2.0 of GCC
Parallel:	Yes
Firmware:	Version 1.12 released Nov-2019
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc v5.3+, commit hash 1972241
Power Management:	OS CPU governor set to "performance"

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A (3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base =	35.0
SPECspeed®2017_fp_energy_base =	201
SPECspeed®2017_fp_peak =	39.1
SPECspeed®2017_fp_energy_peak =	224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Power

Max. Power (W): 289.13
Idle Power (W): 75.62
Min. Temperature (C): 21.00
Elevation (m): 60
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire
Provisioning: Line powered

Power Settings

Management FW: Version 11.05.111 of Falcon BMC
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply
Backplane: N/A
Other Storage: N/A
Storage Model #s: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 1 Gbps
Other HW Model #s: --

Power Analyzer

Power Analyzer: cpu-reference-ptd:8000
Hardware Vendor: Yokogawa
Model: YokogawaWT310E
Serial Number: T11733385
Input Connection: Serial over USB
Metrology Institute: NIST
Calibration By: Yokogawa USA
Calibration Label: T126622
Calibration Date: 18-Aug-2025
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: Directly connected
Current Ranges Used: 5A
Voltage Range Used: 150V

Temperature Meter

Temperature Meter: cpu-reference-ptd:9000
Hardware Vendor: PCSensor
Model: USB9097+DS18B20
Serial Number: --
Input Connection: USB
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: In front of SUT front panel primary air inlet

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	32	428	138	84.2	764	197	227	**425**	**139**	**83.8**	**768**	**197**	**232**	424	139	83.9	767	198	232
607.cactuBSSN_s	32	280	59.6	51.7	353	185	206	281	59.4	51.7	353	184	204	**280**	**59.5**	**51.8**	**352**	**185**	**207**
619.lbm_s	32	264	19.8	52.3	114	198	219	266	19.7	52.4	114	197	219	**265**	**19.8**	**52.2**	**114**	**197**	**219**
621.wrf_s	32	421	31.4	81.8	177	194	217	419	31.5	82.1	176	196	218	**420**	**31.5**	**82.6**	**175**	**197**	**226**
627.cam4_s	32	**301**	**29.4**	**53.0**	**182**	**176**	**205**	301	29.4	52.9	182	176	203	302	29.4	53.0	182	176	205
628.pop2_s	32	505	23.5	95.1	137	189	213	502	23.6	94.4	138	188	207	**504**	**23.5**	**95.3**	**137**	**189**	**208**
638.imagick_s	32	645	22.4	164	96.1	254	286	**646**	**22.3**	**163**	**96.5**	**252**	**286**	646	22.3	164	96.1	253	286
644.nab_s	32	391	44.6	62.9	302	161	177	**391**	**44.7**	**62.9**	**302**	**161**	**176**	391	44.7	62.9	302	161	176
649.fotonik3d_s	32	**336**	**27.1**	**54.7**	**187**	**163**	**180**	337	27.1	54.7	187	162	179	335	27.2	54.6	188	163	180
654.roms_s	32	545	28.9	116	152	213	255	546	28.8	116	151	213	253	**546**	**28.8**	**117**	**150**	**215**	**254**

SPECspeed®2017_fp_base = 35.0

SPECspeed®2017_fp_energy_base = 201

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0

SPECspeed®2017_fp_energy_base = 201

SPECspeed®2017_fp_peak = 39.1

SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	32	372	159	76.5	842	206	237	**372**	**159**	**77.3**	**833**	**208**	**244**	373	158	76.8	838	206	243
607.cactuBSSN_s	32	249	67.0	46.2	395	186	202	**249**	**67.1**	**46.2**	**395**	**186**	**203**	247	67.4	45.9	397	186	203
619.lbm_s	32	257	20.4	51.8	115	202	223	257	20.4	52.6	113	205	228	**257**	**20.4**	**51.4**	**116**	**200**	**223**
621.wrf_s	32	346	38.3	71.5	202	207	245	348	38.0	71.9	201	207	257	**347**	**38.1**	**71.8**	**201**	**207**	**240**
627.cam4_s	32	184	48.3	35.0	275	191	226	184	48.1	35.4	273	192	227	**184**	**48.2**	**35.1**	**275**	**190**	**226**
628.pop2_s	32	505	23.5	95.1	137	189	213	502	23.6	94.4	138	188	207	**504**	**23.5**	**95.3**	**137**	**189**	**208**
638.imagick_s	32	716	20.1	162	96.9	227	288	**716**	**20.2**	**158**	**99.2**	**221**	**289**	715	20.2	162	96.9	227	289
644.nab_s	32	317	55.2	51.0	373	161	174	316	55.3	50.9	373	161	174	**316**	**55.2**	**50.9**	**373**	**161**	**173**
649.fotonik3d_s	32	333	27.4	53.8	190	162	178	334	27.3	53.9	190	161	178	**334**	**27.3**	**53.9**	**190**	**161**	**178**
654.roms_s	32	**531**	**29.7**	**112**	**157**	**211**	**269**	530	29.7	112	157	212	268	531	29.7	112	158	210	271

SPECspeed®2017_fp_peak = **39.1**

SPECspeed®2017_fp_energy_peak = **224**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/usr/lib64/:/usr/lib/:/lib64:/home/mjm/jemalloc/lib"
OMP_STACKSIZE = "120M"
```

General Notes

```
607.cactuBSSN_s (peak): "snprintf" src.alt was used.

607.cactuBSSN_s (base): "snprintf" src.alt was used.

jemalloc is a general purpose malloc(3) implementation that emphasizes
fragmentation avoidance and scalable concurrency support.
sources available from https://github.com/facebook/jemalloc/tree/1972241
and built via "./configure --with-lg-quantum=3" which used system gcc-14 -O3

This benchmark result is intended to provide perspective on
past power and/or performance using the historical hardware
and/or software described on this result page.

The system as described on this result page was formerly
generally available. At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC OSG Policy document, http://www.spec.org/osg/policy.html

This measured result may not be representative of the result
that would be measured were this benchmark run with hardware
and software available as of the publication date.
```

Platform Notes

```
Sysinfo program /home/mjm/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
```

(Continued on next page)

Platform Notes (Continued)

```
running on emag Wed Mar  4 07:35:37 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux emag 6.8.0 #1 SMP PREEMPT_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64 aarch64 aarch64 GNU/Linux

------------------------------------------------------------
2. w
   07:35:37 up 75 days,  8:00,  2 users,  load average: 1.08, 4.50, 3.69
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  mjm              10.13.114.186    28Jan26  4days  0.00s  0.02s sshd: mjm [priv]

------------------------------------------------------------
3. Username
  From environment variable $USER:  mjm

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 16691648
  process              128681
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --system --deserialize=66
 SCREEN
 -bin/tcsh
 runcpu --flagsurl=$SPEC/gcc.2024-08-14.xml --reportable -c emag-O3-gcc15 --tune=base,peak -n 3 --threads 32
   fpspeed
 runcpu --flagsurl $SPEC/gcc.2024-08-14.xml --reportable --configfile emag-O3-gcc15 --tune base,peak
   --iterations 3 --threads 32 --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.098/templogs/preenv.fpspeed.098.0.log --lognum 098.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo -f
$SPEC = /home/mjm/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    CPU implementer : 0x50
    CPU architecture: 8
    CPU variant     : 0x3
    CPU part        : 0x000
    CPU revision    : 2
    Features        : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         aarch64
  CPU op-mode(s):                       32-bit, 64-bit
  Byte Order:                           Little Endian
  CPU(s):                               32
  On-line CPU(s) list:                  0-31
  Vendor ID:                            APM
  Model name:                           -
  Model:                                2
  Thread(s) per core:                   1
  Core(s) per socket:                   32
  Socket(s):                            1
  Stepping:                             0x3
  Frequency boost:                      disabled
  CPU(s) scaling MHz:                   100%
  CPU max MHz:                          2911.7639
  CPU min MHz:                          363.9700
  BogoMIPS:                             80.00
  Flags:                                fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
  L1d cache:                            1 MiB (32 instances)
  L1i cache:                            1 MiB (32 instances)
  L2 cache:                             4 MiB (16 instances)
  NUMA node(s):                         1
  NUMA node0 CPU(s):                    0-31
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Mitigation; PTI
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Mmio stale data:      Not affected
  Vulnerability Retbleed:             Not affected
  Vulnerability Spec rstack overflow: Not affected
  Vulnerability Spec store bypass:    Vulnerable
  Vulnerability Spectre v1:           Mitigation; __user pointer sanitization
  Vulnerability Spectre v2:           Vulnerable
  Vulnerability Srbds:                Not affected
  Vulnerability Tsx async abort:      Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       1M    8 Data            1
     L1i       32K       1M    8 Instruction     1
     L2       256K       4M   32 Unified         2

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0-31
  node 0 size: 130403 MB
  node 0 free: 68466 MB
  node distances:
  node   0
    0:  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       133533376 kB

------------------------------------------------------------
10. who -r
  run-level 5 Dec 18 23:35

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common
                   grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi
                   open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat
                   systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                   systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-networkd-wait-online@
                   systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config
                   systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync
  generated        openipmi perlbal
  indirect         serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uuidd
```

(Continued on next page)

Platform Notes (Continued)

```
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0
  root=UUID=16268541-06d0-4374-97ca-2d512d4db26f
  ro
  cma=1024M
  iommu.passthrough=1

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing              0
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  536870912
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none            8191
  max_ptes_shared          4096
  max_ptes_swap            1024
  pages_to_scan           65536
  scan_sleep_millisecs    10000

------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04.1 LTS

------------------------------------------------------------
18. Disk information
SPEC is set to: /home/mjm/cpu2017
```

(Continued on next page)

Platform Notes (Continued)

```
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  439G  317G   99G  77% /

------------------------------------------------------------
19. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        HR330A            7X33CTO1WW
    Product Family: Lenovo ThinkSystem HR330A/HR350A

------------------------------------------------------------
20. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667


------------------------------------------------------------
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       LENOVO
   BIOS Version:      HVE104N-1.12
   BIOS Date:         11/29/2019
   BIOS Revision:     1.12
   Firmware Revision: 1.7
```

Power Settings Notes

```
OS CPU governor was set using the command:
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------
GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
gcc

Fortran benchmarks:
gfortran

Benchmarks using both Fortran and C:
gfortran gcc

Benchmarks using Fortran, C, and C++:
g++ gcc gfortran

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-mabi=lp64 -std=c99 -g -O3 -mcpu=native -flto=16
-fno-strict-aliasing -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

Fortran benchmarks:
-mabi=lp64 -g -O3 -mcpu=native -flto=16 -DSPEC_OPENMP -fopenmp
-L/home/mjm/jemalloc/lib -ljemalloc

Benchmarks using both Fortran and C:
-mabi=lp64 -std=c99 -g -O3 -mcpu=native -flto=16
-fno-strict-aliasing -DSPEC_OPENMP -fopenmp -L/home/mjm/jemalloc/lib
-ljemalloc

Benchmarks using Fortran, C, and C++:
-mabi=lp64 -std=c++03 -std=c99 -g -O3 -mcpu=native -flto=16
-fno-strict-aliasing -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

Base Other Flags

C benchmarks:
-Wno-error=implicit-int

Fortran benchmarks:
-fallow-argument-mismatch

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-error=implicit-int -fallow-argument-mismatch`

Benchmarks using Fortran, C, and C++:
`-Wno-error=implicit-int -fallow-argument-mismatch`

Peak Compiler Invocation

C benchmarks:
`gcc`

Fortran benchmarks:
`gfortran`

Benchmarks using both Fortran and C:
`gfortran gcc`

Benchmarks using Fortran, C, and C++:
`g++ gcc gfortran`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:
`-mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib -ljemalloc`

Fortran benchmarks:
`-mabi=lp64 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native -flto=16 -DSPEC_OPENMP -fopenmp -L/home/mjm/jemalloc/lib -ljemalloc`

Benchmarks using both Fortran and C:

(Continued on next page)

Peak Optimization Flags (Continued)

621.wrf_s: `-mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native -flto=16 -DSPEC_OPENMP -fopenmp -L/home/mjm/jemalloc/lib -ljemalloc`

627.cam4_s: `-mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native -flto=16 -fno-strict-aliasing -DSPEC_OPENMP -fopenmp -L/home/mjm/jemalloc/lib -ljemalloc`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-mabi=lp64 -std=c++03 -std=c99 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib -ljemalloc`

Peak Other Flags

Benchmarks using both Fortran and C (except as noted below):
`-Wno-error=implicit-int -fallow-argument-mismatch`

621.wrf_s: `-fallow-argument-mismatch`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/gcc.2026-04-28.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2017/flags/gcc.2026-04-28.xml`

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-04 02:35:35-0500.
Report generated on 2026-04-28 13:16:52 by CPU2017 PS formatter v6716.
Originally published on 2026-04-28.