



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Apr-2026

Hardware Availability: May-2026

Software Availability: Mar-2026

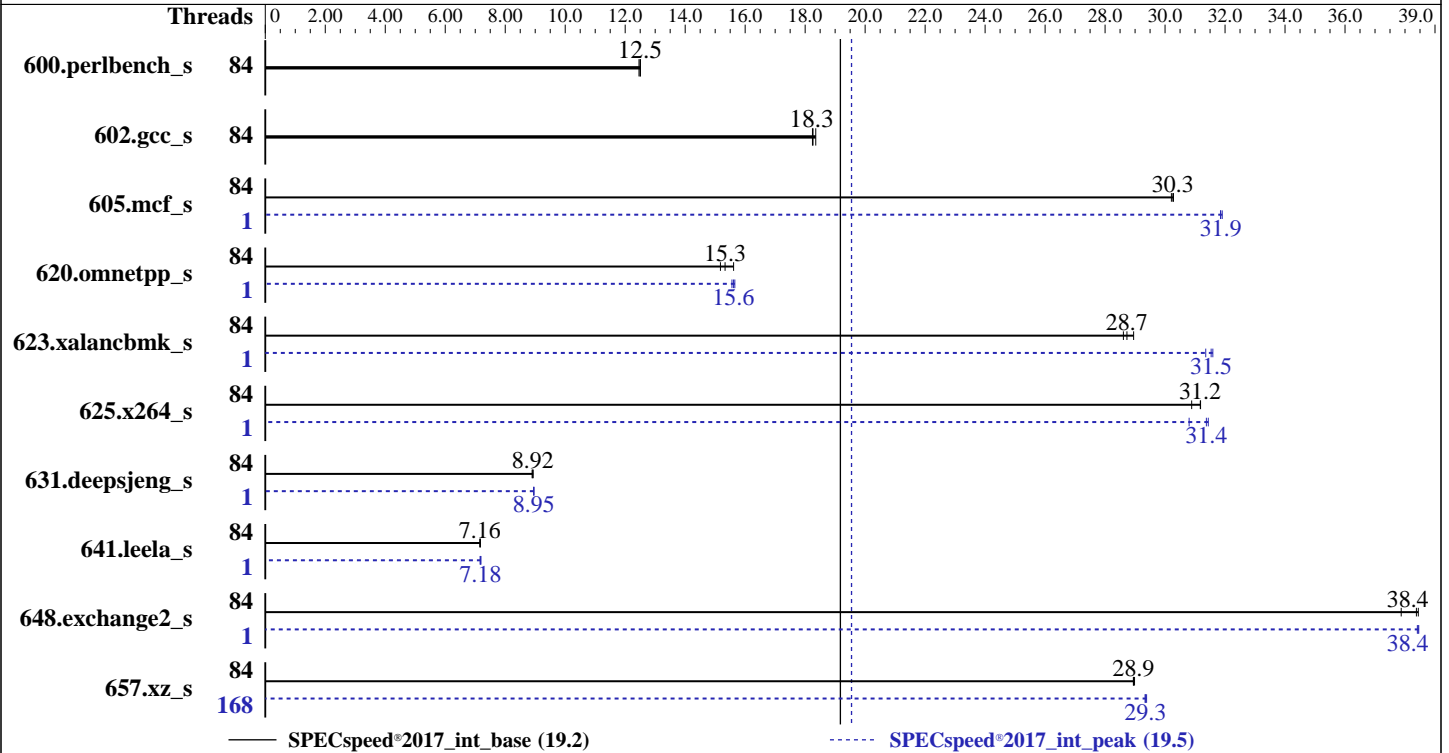

### Hardware

CPU Name: AMD EPYC 8635P  
 Max MHz: 4500  
 Nominal: 1600  
 Enabled: 84 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 7 cores  
 Other: None  
 Memory: 384 GB (6 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 465 GB NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: Ubuntu 24.04.3 LTS  
 6.8.0-106-generic  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 2.0 released Mar-2026  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Apr-2026  
Hardware Availability: May-2026  
Software Availability: Mar-2026

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	84	<b>142</b>	<b>12.5</b>	142	12.5	142	12.5	84	<b>142</b>	<b>12.5</b>	142	12.5	142	12.5
602.gcc_s	84	217	18.4	<b>218</b>	<b>18.3</b>	218	18.2	84	217	18.4	<b>218</b>	<b>18.3</b>	218	18.2
605.mcf_s	84	<b>156</b>	<b>30.3</b>	156	30.2	156	30.3	1	148	31.8	148	31.9	<b>148</b>	<b>31.9</b>
620.omnetpp_s	84	104	15.6	<b>106</b>	<b>15.3</b>	107	15.2	1	105	15.6	<b>104</b>	<b>15.6</b>	104	15.7
623.xalancbmk_s	84	48.9	29.0	49.5	28.6	<b>49.3</b>	<b>28.7</b>	1	<b>44.9</b>	<b>31.5</b>	44.9	31.6	45.2	31.4
625.x264_s	84	56.6	31.2	<b>56.6</b>	<b>31.2</b>	57.1	30.9	1	56.1	31.4	57.3	30.8	<b>56.2</b>	<b>31.4</b>
631.deepsjeng_s	84	160	8.93	161	8.90	<b>161</b>	<b>8.92</b>	1	<b>160</b>	<b>8.95</b>	160	8.95	160	8.95
641.leela_s	84	238	7.17	<b>238</b>	<b>7.16</b>	238	7.16	1	237	7.19	<b>238</b>	<b>7.18</b>	238	7.16
648.exchange2_s	84	<b>76.6</b>	<b>38.4</b>	77.6	37.9	76.5	38.4	1	76.4	38.5	76.5	38.4	<b>76.5</b>	<b>38.4</b>
657.xz_s	84	213	29.0	<b>214</b>	<b>28.9</b>	214	28.9	168	<b>211</b>	<b>29.3</b>	210	29.4	211	29.3

SPECspeed®2017\_int\_base = **19.2**

SPECspeed®2017\_int\_peak = **19.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-167"
LD_LIBRARY_PATH =
  "/spec/cpu2017aoccal.5speed/amd_speed_aocc500_znver5_A_lib/lib:/spec/cpu2017aoccal.5speed/amd_speed_aoc
  cc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "168"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-167"
```

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS settings:

```
Determinism Control = Manual
Determinism Enable = Power
TDP control = Manual
TDP = 225
Package Power Limit = 225
Package Power Limit Control = Manual
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

### Platform Notes (Continued)

SMEE = Disabled

Sysinfo program /spec/cpu2017aocca1.5speed/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on smc9027sorano-u24-os Wed Apr 1 03:56:14 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.14)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux smc9027sorano-u24-os 6.8.0-106-generic #106-Ubuntu SMP PREEMPT\_DYNAMIC Fri Mar 6 07:58:08 UTC 2026  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
03:56:14 up 3:13, 4 users, load average: 0.09, 0.07, 0.03  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root 10.23.202.142 03:54 3:13m 0.00s 0.02s sshd: root@notty  
root 10.23.202.142 03:54 3:13m 0.00s 0.02s sshd: root@pts/1  
root 10.23.202.142 03:49 3:13m 0.00s 0.02s sshd: root@notty  
root 10.23.202.142 03:49 3:13m 0.00s 0.11s sshd: root@pts/0  
-----

3. Username  
From environment variable \$USER: root  
-----

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

### Platform Notes (Continued)

```
memory(kbytes)          unlimited
locked memory(kbytes)  2097152
process                 1544569
nofiles                 1024
vmemory(kbytes)        unlimited
locks                   unlimited
rtprio                  0
```

```
-----
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
screen -S cpu
SCREEN -S cpu
/bin/bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeer
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeer.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec/cpu2017aoccal.5speed
-----
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 8635P 84-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping      : 1
microcode     : 0xb002162
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 84
siblings      : 168
1 physical ids (chips)
168 processors (hardware threads)
physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 0: apicids 0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

```
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                168
On-line CPU(s) list:  0-167
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 8635P 84-Core Processor
BIOS Model name:      AMD EPYC 8635P 84-Core Processor
                       1.6GHz
                       Unknown CPU @
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

### Platform Notes (Continued)

```

BIOS CPU family:          107
CPU family:                26
Model:                     2
Thread(s) per core:       2
Core(s) per socket:       84
Socket(s):                 1
Stepping:                  1
Frequency boost:          enabled
CPU(s) scaling MHz:       39%
CPU max MHz:               4532.8120
CPU min MHz:               1500.0000
BogoMIPS:                  3200.00
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                           pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                           pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                           nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                           monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
                           xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                           abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                           topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
                           cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                           ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                           invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                           clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                           xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                           user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru
                           wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock
                           nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                           pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
                           v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
                           vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                           bus_lock_detect movdiri movdir64b overflow_recov succor smca fsmr
                           avx512_vp2intersect flush_lld debug_swap srso_user_kernel_no
Virtualization:           AMD-V
L1d cache:                3.9 MiB (84 instances)
L1i cache:                2.6 MiB (84 instances)
L2 cache:                 84 MiB (84 instances)
L3 cache:                 384 MiB (12 instances)
NUMA node(s):             1
NUMA node0 CPU(s):       0-167
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                           always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:      Not affected
Vulnerability Tsa:        Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape:    Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.9M	12	Data	1	64	1	64
L1i	32K	2.6M	8	Instruction	1	64	1	64
L2	1M	84M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-167
node 0 size: 386224 MB
node 0 free: 383258 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 395493396 kB
```

10. who -r

```
run-level 5 Apr 1 00:42
```

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.14)

```
Default Target Status
graphical running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysexit systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-106-generic
root=UUID=1bee86d1-7232-471a-ab77-0c9fc9498fal
ro
```

14. cpupower frequency-info

```
analyzing CPU 108:
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

### Platform Notes (Continued)

current policy: frequency should be within 1.50 GHz and 1.60 GHz.  
The governor "performance" may decide which speed to use within this range.

boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 1600MHz

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
-----

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
-----

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
-----

```

```

-----
19. Disk information
SPEC is set to: /spec/cpu2017aoccal.5speed
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  ext4  457G   73G  361G  17% /
-----

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

### Platform Notes (Continued)

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Supermicro  
Product: Super Server  
Product Family: SMC H13  
Serial: 0123456789  
-----

21. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
5x Micron Technology MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400  
1x Micron Technology MTC40F2046S1RC64BD2 MXCC 64 GB 2 rank 6400  
-----

22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 2.0  
BIOS Date: 03/23/2026  
BIOS Revision: 5.42  
-----

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
657.xz\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
641.leela\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
-----



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

625.x264\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

657.xz\_s: Same as 625.x264\_s

C++ benchmarks:

620.omnetpp\_s: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk\_s: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT, AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Apr-2026  
**Hardware Availability:** May-2026  
**Software Availability:** Mar-2026

## Peak Optimization Flags (Continued)

623.xalancbmk\_s (continued):

```
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela\_s: Same as 631.deepsjeng\_s

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Sorano-revB.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

WIO A+ Server AS -1015SV-WTNRT  
(H13SVW-NT , AMD EPYC 8635P)

SPECspeed®2017\_int\_base = 19.2

SPECspeed®2017\_int\_peak = 19.5

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Apr-2026

**Hardware Availability:** May-2026

**Software Availability:** Mar-2026

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Sorano-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-31 23:56:14-0400.

Report generated on 2026-05-19 17:27:23 by CPU2017 PDF formatter v6716.

Originally published on 2026-05-19.