



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

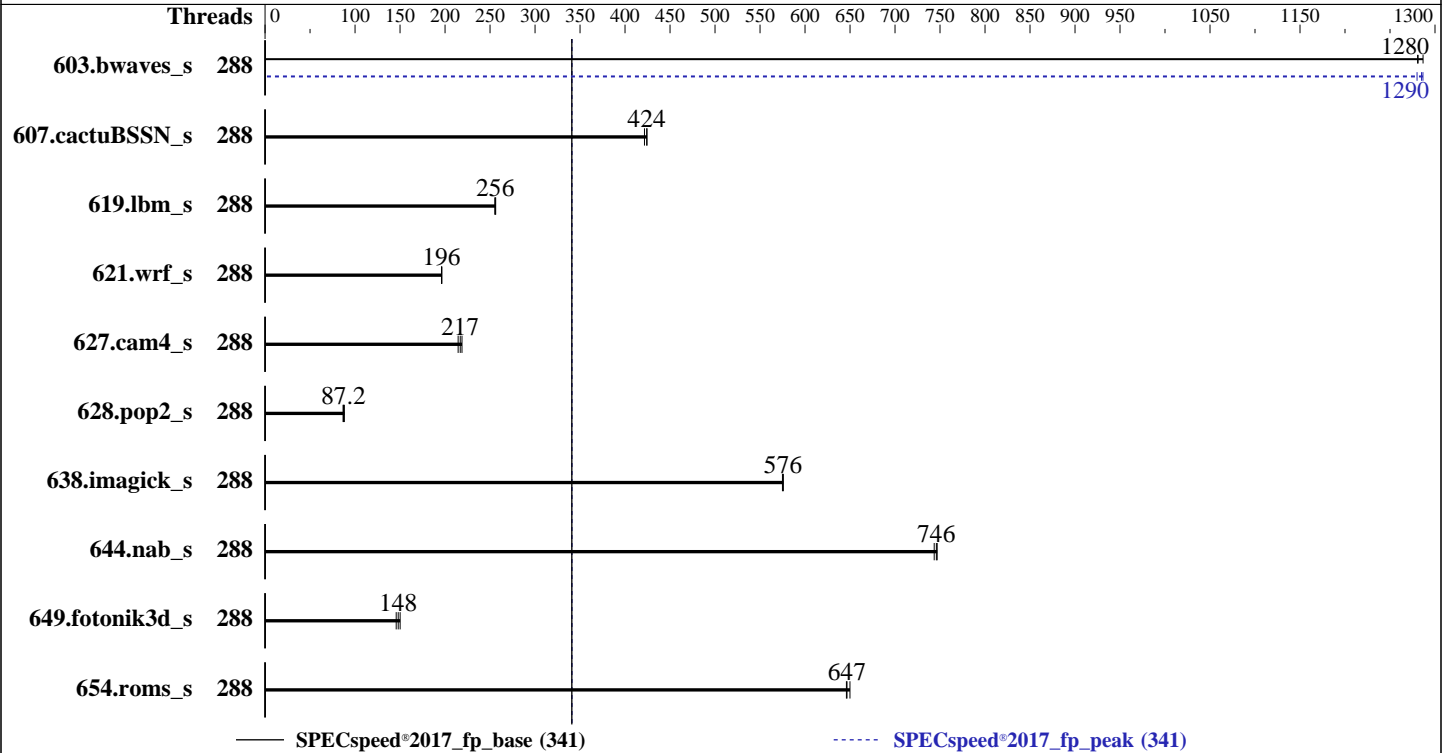

Hardware

CPU Name: Intel Xeon 6780E
 Max MHz: 3000
 Nominal: 2200
 Enabled: 288 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 144 MB I+D on chip per chip,
 4 MB shared / 4 cores
 L3: 108 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 1.6 TB PCIe NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 0701 released Oct-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECSpeed®2017_fp_base = 341

SPECSpeed®2017_fp_peak = 341

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	288	<u>46.0</u>	<u>1280</u>	46.1	1280	45.9	1290	288	46.1	1280	45.9	1290	<u>45.9</u>	<u>1290</u>
607.cactuBSSN_s	288	39.5	422	39.3	424	<u>39.3</u>	<u>424</u>	288	39.5	422	39.3	424	<u>39.3</u>	<u>424</u>
619.lbm_s	288	20.5	255	20.4	256	<u>20.5</u>	<u>256</u>	288	20.5	255	20.4	256	<u>20.5</u>	<u>256</u>
621.wrf_s	288	67.5	196	<u>67.4</u>	<u>196</u>	67.3	196	288	67.5	196	<u>67.4</u>	<u>196</u>	67.3	196
627.cam4_s	288	<u>40.9</u>	<u>217</u>	40.5	219	41.3	215	288	<u>40.9</u>	<u>217</u>	40.5	219	41.3	215
628.pop2_s	288	<u>136</u>	<u>87.2</u>	137	86.7	135	88.2	288	<u>136</u>	<u>87.2</u>	137	86.7	135	88.2
638.imagick_s	288	<u>25.1</u>	<u>576</u>	25.1	575	25.1	576	288	<u>25.1</u>	<u>576</u>	25.1	575	25.1	576
644.nab_s	288	23.5	744	<u>23.4</u>	<u>746</u>	23.4	747	288	<u>23.5</u>	744	<u>23.4</u>	<u>746</u>	23.4	747
649.fotonik3d_s	288	62.6	146	<u>61.6</u>	<u>148</u>	60.7	150	288	62.6	146	<u>61.6</u>	<u>148</u>	60.7	150
654.roms_s	288	24.4	646	24.2	650	<u>24.3</u>	<u>647</u>	288	24.4	646	24.2	650	<u>24.3</u>	<u>647</u>

SPECSpeed®2017_fp_base = **341**

SPECSpeed®2017_fp_peak = **341**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/ic24u1/lib/intel64:/ic24u1/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes

BIOS Configuration:

ENERGY_PERF_BIAS_CFG mode = Performance

Latency Optimized Mode = Enabled

Engine Boost = Aggressive

SR-IOV Support = Disabled

Page Policy = Adaptive

Adjacent Cache Prefetch = Disable

Sysinfo program /ic24ul/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Mar 26 09:16:18 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
09:16:18 up 15:30, 2 users, load average: 4.63, 5.81, 3.47

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	Wed17	15:28m	1.36s	0.00s	/bin/bash ./speed.sh
root	tty2	-	08:34	41:54	0.02s	0.02s	-bash

3. Username
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```

core file size      (blocks, -c) unlimited
data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 2061436
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size        (kbytes, -s) unlimited
cpu time          (seconds, -t) unlimited
max user processes (-u) 2061436
virtual memory    (kbytes, -v) unlimited
file locks        (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./speed.sh
/bin/bash ./speed.sh
runccpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=288 --tune base,peak -o all --define smt-on
  --define drop_caches fpspeed
runccpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=288 --tune base,peak --output_format all
  --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.869/templogs/preenv.fpspeed.869.0.log --lognum 869.0
  --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6780E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x3000382
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 144
siblings       : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-143
physical id 1: core ids 0-143
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Platform Notes (Continued)

, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                288
On-line CPU(s) list:  0-287
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6780E
BIOS Model name:      Intel(R) Xeon(R) 6780E  CPU @ 2.2GHz
BIOS CPU family:      179
CPU family:            6
Model:                 175
Thread(s) per core:   1
Core(s) per socket:   144
Socket(s):             2
Stepping:              3
CPU(s) scaling MHz:   30%
CPU max MHz:           3000.0000
CPU min MHz:           800.0000
BogoMIPS:              4400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pdcem pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bml avx2 smep bmi2 erms invpcid cqm
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vmmi umip pku ospke
waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote
movdiri movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt
flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             9 MiB (288 instances)
L1i cache:             18 MiB (288 instances)
L2 cache:              288 MiB (72 instances)
L3 cache:              216 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-143
NUMA node1 CPU(s):    144-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:               Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRBSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	9M	8	Data	1	64	1	64
L1i	64K	18M	8	Instruction	1	128	1	64
L2	4M	288M	16	Unified	2	4096	1	64
L3	108M	216M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-143
node 0 size: 257453 MB
node 0 free: 253566 MB
node 1 cpus: 144-287
node 1 size: 257931 MB
node 1 free: 251424 MB
node distances:
node 0 1
0: 10 21
1: 21 10

```

9. /proc/meminfo

MemTotal: 527754688 kB

10. who -r

run-level 3 Mar 25 17:46

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```

indirect
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned udisks2 vncserver@
systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet
video=1024x768

```

```

-----
14. cpupower frequency-info
analyzing CPU 168:
  current policy: frequency should be within 800 MHz and 3.00 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Platform Notes (Continued)

defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /ic24ul

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p8	xfs	500G	131G	370G	27%	/

21. /sys/devices/virtual/dmi/id

Vendor:	ASUSTeK COMPUTER INC.
Product:	RS720-E12-RS8G
Product Family:	Server
Serial:	----

22. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	0701
BIOS Date:	10/13/2025
BIOS Revision:	7.1

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECSpeed®2017_fp_base = 341

SPECSpeed®2017_fp_peak = 341

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECspeed®2017_fp_base = 341

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016

Test Date: Mar-2026

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2025

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.20 GHz, Intel Xeon 6780E)

SPECspeed®2017_fp_base = 341

SPECspeed®2017_fp_peak = 341

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-25 21:16:18-0400.
Report generated on 2026-05-19 17:27:23 by CPU2017 PDF formatter v6716.
Originally published on 2026-05-19.