



SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

[SPECmpiL_peak2007 = Not Run](#)

Cray XC30 (Intel Xeon E5-2697 v2)

SPECmpiL_base2007 = 43.5

MPI2007 license: 3440A


Test date: Mar-2017

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Feb-2017

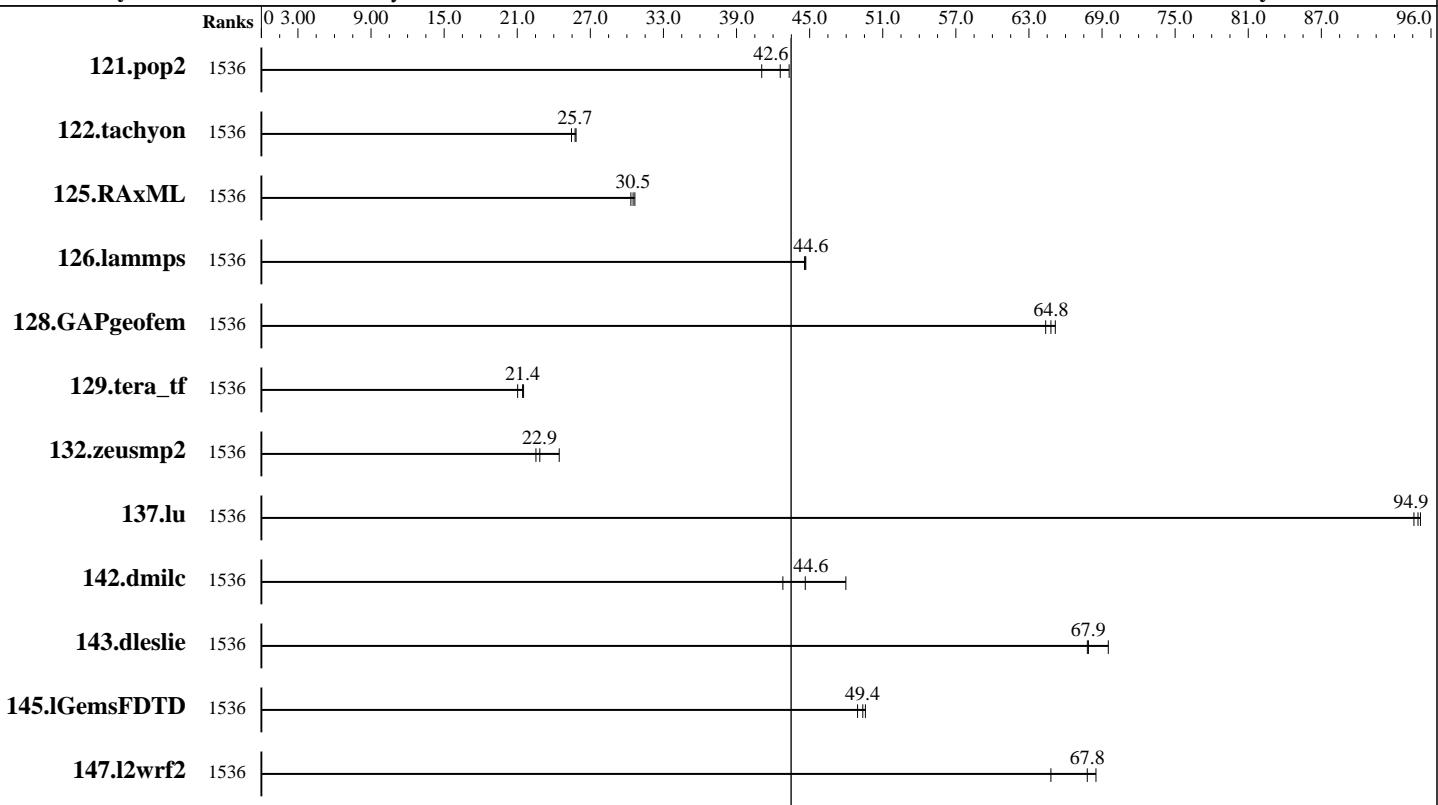

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	1536	94.7	41.1	91.4	42.6	89.8	43.3							
122.tachyon	1536	75.5	25.7	76.4	25.5	75.3	25.8							
125.RAxML	1536	95.2	30.7	96.2	30.3	95.7	30.5							
126.lammps	1536	55.0	44.7	55.1	44.6	55.2	44.6							
128.GAPgeofem	1536	91.1	65.2	91.6	64.8	92.2	64.4							
129.tera_tf	1536	52.2	21.0	51.3	21.4	51.1	21.5							
132.zeusmp2	1536	94.1	22.5	86.7	24.4	92.8	22.9							
137.lu	1536	44.3	94.9	44.2	95.1	44.4	94.6							
142.dmilc	1536	86.1	42.8	82.5	44.6	76.8	48.0							
143.dleslie	1536	44.6	69.5	45.7	67.8	45.7	67.9							
145.lGemsFDTD	1536	89.4	49.4	89.0	49.6	90.1	48.9							
147.l2wrf2	1536	120	68.5	121	67.8	127	64.8							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

SPECmpiL_peak2007 = Not Run

Cray XC30 (Intel Xeon E5-2697 v2)

SPECmpiL_base2007 = 43.5

MPI2007 license: 3440A

Test date: Mar-2017

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Feb-2017

Hardware Summary

Type of System:	Homogeneous
Compute Node:	Big Red II Plus Node
Interconnects:	Infiniband (QDR)
	Cray Aries
File Server Node:	Data Capacitor II
Total Compute Nodes:	64
Total Chips:	128
Total Cores:	1536
Total Threads:	3072
Total Memory:	4 TB
Base Ranks Run:	1536
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C Composer XE 2017 for Linux, Version 17.0.2.174 Build 20170213
C++ Compiler:	Intel C++ Composer XE 2017 for Linux, Version 17.0.2.174 Build 20170213
Fortran Compiler:	Intel Fortran Composer XE 2017 for Linux, Version 17.0.2.174 Build 20170213
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	Cray MPI (MPT) 7.5.0
Other MPI Info:	None
Pre-processors:	No
Other Software:	None

Node Description: Big Red II Plus Node

Hardware

Number of nodes:	64
Uses of the node:	compute
Vendor:	Cray
Model:	XC30
CPU Name:	Intel Xeon E5-2697 v2
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	24
Cores per chip:	12
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology disabled, Hyper-Threading enabled
CPU MHz:	2700
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (8 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	None
Other Hardware:	None
Adapter:	Mellanox Technologies MT27500 ConnectX-3
Number of Adapters:	1
Slot Type:	PCIe x16 Gen 3
Data Rate:	40Gbps
Ports Used:	1
Interconnect Type:	40 Gigabit Infiniband (QDR)
Adapter:	Cray Aries
Number of Adapters:	1
Slot Type:	PCIe x16 Gen 3
Data Rate:	126 Gbps
Ports Used:	4
Interconnect Type:	Aries

Software

Adapter:	Mellanox Technologies MT27500 ConnectX-3
Adapter Driver:	1.0-ofed1.5.4.1
Adapter Firmware:	2.33.5100
Adapter:	Cray Aries
Adapter Driver:	Proprietary Cray_kgni v004.r091
Adapter Firmware:	
Operating System:	SUSE Linux Enterprise Server 11 SP3 (x86_64), Cray Linux Environment 5.2 3.0.101-0.46.1_1.0502.8871-cray_ari_c
Local File System:	None
Shared File System:	Lustre
System State:	Multi-User
Other Software:	Slurm 15.08.12



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

SPECmpiL_peak2007 = Not Run

Cray XC30 (Intel Xeon E5-2697 v2)

SPECmpiL_base2007 = 43.5

MPI2007 license: 3440A

Test date: Mar-2017

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Feb-2017

Node Description: Data Capacitor II

Hardware		Software
Number of nodes:	2	Adapter: Mellanox ConnectX MHQH29-XTC
Uses of the node:	fileserver	Adapter Driver: 1.0-ofed1.5.4.1
Vendor:	DDN	Adapter Firmware: 2.9.1000
Model:	DDN SFA12K	Operating System: CentOS 6.2
CPU Name:	Intel Xeon CPU E5-2620	Local File System: Linux/ext4
CPU(s) orderable:	1-2 chips	Shared File System: lustre
Chips enabled:	2	System State: Multi-User
Cores enabled:	12	Other Software: None
Cores per chip:	6	
Threads per core:	1	
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz	
CPU MHz:	2000	
Primary Cache:	32 KB I + 32 KB D on chip per core	
Secondary Cache:	256 KB I+D on chip per core	
L3 Cache:	15 MB I+D on chip per chip	
Other Cache:	None	
Memory:	96 GB	
Disk Subsystem:	30 TB RAID 6, 10 (8 + 2) x 3 TB SAS Hitachi HUS724030ALS640, 7200RPM, 6.0Gbps	
Other Hardware:	None	
Adapter:	Mellanox ConnectX MHQH29-XTC	
Number of Adapters:	1	
Slot Type:	PCIe x8 Gen 2	
Data Rate:	40Gbps	
Ports Used:	1	
Interconnect Type:	40 Gigabit Infiniband (QDR)	

Interconnect Description: Infiniband (QDR)

Hardware		Software
Vendor:	DDN	
Model:	Mellanox SX6506	
Switch Model:	Mellanox SX6506	
Number of Switches:	1	
Number of Ports:	108	
Data Rate:	56 Gbps	
Firmware:	mellanox SX6506	
Topology:	switched	
Primary Use:	Lustre fileserver	



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

SPECmpiL_peak2007 = Not Run

Cray XC30 (Intel Xeon E5-2697 v2)

SPECmpiL_base2007 = 43.5

MPI2007 license: 3440A

Test date: Mar-2017

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Feb-2017

Interconnect Description: Cray Aries

Hardware

Vendor: Cray
Model: Cray Aries
Switch Model: Cray Aries
Number of Switches: 144
Number of Ports: 48
Data Rate: 126 Gb/s
Firmware: v004.r091
Topology: Dragonfly
Primary Use: MPI traffic

Software

Submit Notes

The config file option 'submit' was used.
submit = srun -c 1 -n \$ranks -q \$command

General Notes

130.socorro (base): "nullify_ptrs" src.alt was used.

MPI startup command:
srun command was used to start MPI jobs.

export MPICH_NO_BUFFER_ALIAS_CHECK=true
If set, the buffer alias error check for collectives is disabled. The MPI standard does not allow aliasing of type OUT or INOUT parameters on the same collective function call. The default is false.

Job placement:
Slurm is used for job placement.
Compute nodes are selected by Slurm.
No specific node selection is used.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:

126.lammps: CC

Fortran benchmarks:
ftn

Continued on next page



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

SPECmpiL_peak2007 = Not Run

Cray XC30 (Intel Xeon E5-2697 v2)

SPECmpiL_base2007 = 43.5

MPI2007 license: 3440A

Test date: Mar-2017

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Feb-2017

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

cc ftn

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

126.lammps: -DMPICH_IGNORE_CXX_SEEK

Base Optimization Flags

C benchmarks:

-O3 -ansi-alias -no-prec-div -fp-model fast=2

C++ benchmarks:

126.lammps: -O3 -ansi-alias -no-prec-div -fp-model fast=2

Fortran benchmarks:

-O3 -ansi-alias -no-prec-div -fp-model fast=2

Benchmarks using both Fortran and C:

-O3 -ansi-alias -no-prec-div -fp-model fast=2

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/EM64T_Intel170_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/EM64T_Intel170_flags.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Mon Dec 11 11:03:38 2017 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 9 December 2017.