



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 14.6

IBM System x3755 (AMD Opteron 8360 SE)

SPECint_base2006 = 12.3

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

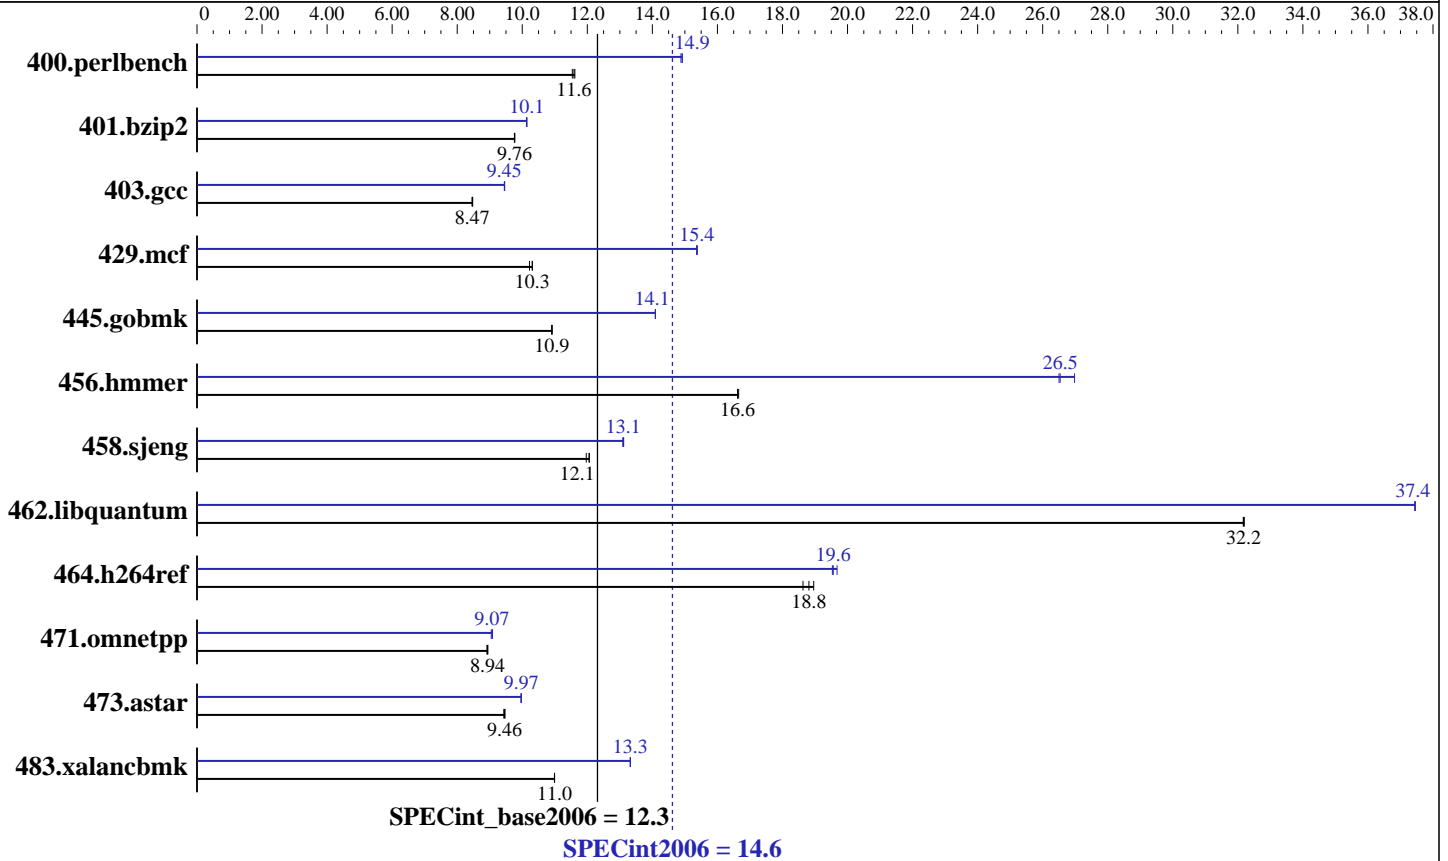

Hardware

CPU Name: AMD Opteron 8360 SE
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16 x 2 GB, DDR2-667 CL5 Reg Dual Rank)
 Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 14.6

IBM System x3755 (AMD Opteron 8360 SE)

SPECint_base2006 = 12.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: Advanced Micro Devices

Test date: Jul-2008
Hardware Availability: Jul-2008
Software Availability: Jun-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	847	11.5	843	11.6	841	11.6	655	14.9	657	14.9	655	14.9
401.bzip2	989	9.76	988	9.76	988	9.77	952	10.1	953	10.1	952	10.1
403.gcc	951	8.47	952	8.45	950	8.48	852	9.45	851	9.46	852	9.45
429.mcf	885	10.3	885	10.3	892	10.2	593	15.4	594	15.4	593	15.4
445.gobmk	961	10.9	962	10.9	961	10.9	744	14.1	745	14.1	744	14.1
456.hammer	561	16.6	560	16.7	561	16.6	352	26.5	352	26.5	346	27.0
458.sjeng	1003	12.1	1011	12.0	1004	12.1	923	13.1	924	13.1	922	13.1
462.libquantum	644	32.2	644	32.2	644	32.2	553	37.5	553	37.4	553	37.4
464.h264ref	1188	18.6	1167	19.0	1176	18.8	1125	19.7	1133	19.5	1131	19.6
471.omnetpp	699	8.94	701	8.91	699	8.94	689	9.07	688	9.08	691	9.05
473.astar	744	9.43	742	9.46	741	9.47	704	9.97	704	9.97	705	9.96
483.xalancbmk	628	11.0	628	11.0	628	11.0	518	13.3	518	13.3	518	13.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Environment variable PGI_HUGE_PAGES set to 896
Set vm/nr_hugepages=3584 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
powersave -f was used to set the CPU frequency to its maximum.

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 14.6

IBM System x3755 (AMD Opteron 8360 SE)

SPECint_base2006 = 12.3

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Base Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

464.h264ref: pathcc

C++ benchmarks (except as noted below):

pathCC

473.astar: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 14.6

IBM System x3755 (AMD Opteron 8360 SE)

SPECint_base2006 = 12.3

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -fastsse -O4
 -Msmartalloc=huge:150 -Mprefetch=t0 -Mnounroll
 -tp barcelona-64 -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:Ofast -m32

429.mcf: -fastsse -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline:1
 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge:150
 -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
 -Mipa=arg -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -fastsse
 -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
 -Bstatic_pgi

462.libquantum: -fastsse -Munroll=m:8 -Msmartalloc=huge:150
 -Mprefetch=distance:4 -Mfprelaxed -Mipa=fast -Mipa=inline
 -Mipa=noarg -tp barcelona-64 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 14.6

IBM System x3755 (AMD Opteron 8360 SE)

SPECint_base2006 = 12.3

CPU2006 license: 11

Test date: Jul-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32 -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge:150
-Msafeptr=global -Mfpelaxed --zc_eh -tp barcelona
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -m32
-lsmarheap

Peak Other Flags

C benchmarks:

429.mcf: -Mipa=jobs:4

456.hmmer: -Mipa=jobs:4

458.sjeng: -Mipa=jobs:4(pass 2)

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):

-L/root/work/cpu2006-amd421gh/amd421gh.libs/32

473.astar: -Mipa=jobs:4(pass 2)

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 14.6

IBM System x3755 (AMD Opteron 8360 SE)

SPECint_base2006 = 12.3

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:52:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.