SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 3810

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2026
Hardware Availability: Oct-2023
Software Availability: Apr-2026

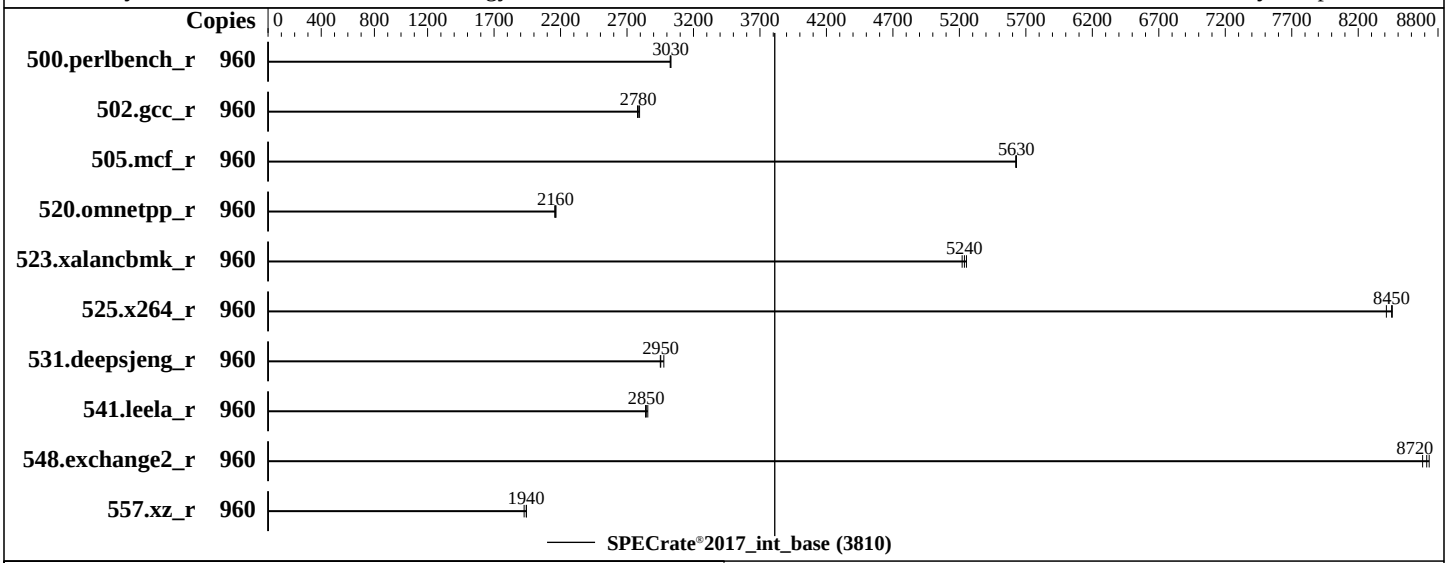

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	480 cores, 8 chips, 2 threads/core
Orderable:	8 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB M.2 NVME SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version EBE123G 7.50 released May-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 3810

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jun-2026
Hardware Availability: Oct-2023
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	960	504	3030	505	3020	**505**	**3030**							
502.gcc_r	960	**488**	**2780**	486	2790	489	2780							
505.mcf_r	960	**276**	**5630**	276	5620	276	5630							
520.omnetpp_r	960	584	2160	**582**	**2160**	582	2170							
523.xalancbmk_r	960	193	5250	194	5220	**194**	**5240**							
525.x264_r	960	200	8410	199	8460	**199**	**8450**							
531.deepsjeng_r	960	373	2950	370	2980	**372**	**2950**							
541.leela_r	960	560	2840	**559**	**2850**	557	2860							
548.exchange2_r	960	290	8680	**289**	**8720**	288	8730							
557.xz_r	960	534	1940	**534**	**1940**	538	1930							

SPECrate®2017_int_base = **3810**

SPECrate®2017_int_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2026.0/lib/intel64:/home/cpu2017-1.1.9-ic2026.0/lib/ia32"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy
DCU Streamer Prefetcher set to Disabled
SNC set to SNC4
Misc set to Option4

 Sysinfo program /home/cpu2017-1.1.9-ic2026.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Jun 19 00:08:27 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    00:08:28 up 4 min,  1 user,  load average: 1.72, 7.67, 4.22
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   pending signals                 (-i) 16510495
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 16510495
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.02.sh
 sh Run502-compliant-ic2026.0-lin-sapphirerapids-rateint-base-smt-on-20260429.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=960 -c
   ic2026.0-lin-sapphirerapids-rate-20260429.cfg --define smt-on --define cores=480 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=960 --configfile
   ic2026.0-lin-sapphirerapids-rate-20260429.cfg --define smt-on --define cores=480 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.037/templogs/preenv.intrate.037.0.log --lognum 037.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2026.0

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000661
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
    cpu cores       : 60
    siblings        : 120
    8 physical ids (chips)
    960 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 2: core ids 0-59
    physical id 3: core ids 0-59
    physical id 4: core ids 0-59
    physical id 5: core ids 0-59
    physical id 6: core ids 0-59
    physical id 7: core ids 0-59
    physical id 0: apicids 0-119
    physical id 1: apicids 128-247
    physical id 2: apicids 256-375
    physical id 3: apicids 384-503
    physical id 4: apicids 512-631
    physical id 5: apicids 640-759
    physical id 6: apicids 768-887
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 7: apicids 896-1015
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        46 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               960
  On-line CPU(s) list:                  0-959
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) Platinum 8490H
  CPU family:                           6
  Model:                                143
  Thread(s) per core:                   2
  Core(s) per socket:                   60
  Socket(s):                            8
  Stepping:                             8
  CPU(s) scaling MHz:                   23%
  CPU max MHz:                          3500.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             3800.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                        vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                        intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                        arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                        vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                        rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                        amx_int8 flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            22.5 MiB (480 instances)
  L1i cache:                            15 MiB (480 instances)
  L2 cache:                             960 MiB (480 instances)
  L3 cache:                             900 MiB (8 instances)
  NUMA node(s):                         32
  NUMA node0 CPU(s):                    0-14,480-494
  NUMA node1 CPU(s):                    15-29,495-509
  NUMA node2 CPU(s):                    30-44,510-524
  NUMA node3 CPU(s):                    45-59,525-539
  NUMA node4 CPU(s):                    60-74,540-554
  NUMA node5 CPU(s):                    75-89,555-569
  NUMA node6 CPU(s):                    90-104,570-584
  NUMA node7 CPU(s):                    105-119,585-599
  NUMA node8 CPU(s):                    120-134,600-614
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node9 CPU(s):                   135-149,615-629
  NUMA node10 CPU(s):                  150-164,630-644
  NUMA node11 CPU(s):                  165-179,645-659
  NUMA node12 CPU(s):                  180-194,660-674
  NUMA node13 CPU(s):                  195-209,675-689
  NUMA node14 CPU(s):                  210-224,690-704
  NUMA node15 CPU(s):                  225-239,705-719
  NUMA node16 CPU(s):                  240-254,720-734
  NUMA node17 CPU(s):                  255-269,735-749
  NUMA node18 CPU(s):                  270-284,750-764
  NUMA node19 CPU(s):                  285-299,765-779
  NUMA node20 CPU(s):                  300-314,780-794
  NUMA node21 CPU(s):                  315-329,795-809
  NUMA node22 CPU(s):                  330-344,810-824
  NUMA node23 CPU(s):                  345-359,825-839
  NUMA node24 CPU(s):                  360-374,840-854
  NUMA node25 CPU(s):                  375-389,855-869
  NUMA node26 CPU(s):                  390-404,870-884
  NUMA node27 CPU(s):                  405-419,885-899
  NUMA node28 CPU(s):                  420-434,900-914
  NUMA node29 CPU(s):                  435-449,915-929
  NUMA node30 CPU(s):                  450-464,930-944
  NUMA node31 CPU(s):                  465-479,945-959
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K    22.5M   12 Data            1     64        1             64
     L1i       32K      15M    8 Instruction     1     64        1             64
     L2         2M     960M   16 Unified         2   2048        1             64
     L3     112.5M     900M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-14,480-494
  node 0 size: 128353 MB
  node 0 free: 127452 MB
  node 1 cpus: 15-29,495-509
  node 1 size: 129015 MB
  node 1 free: 128660 MB
  node 2 cpus: 30-44,510-524
  node 2 size: 129015 MB
  node 2 free: 128524 MB
  node 3 cpus: 45-59,525-539
```

(Continued on next page)

Platform Notes (Continued)

```
node 3 size: 129015 MB
node 3 free: 128376 MB
node 4 cpus: 60-74,540-554
node 4 size: 129015 MB
node 4 free: 128661 MB
node 5 cpus: 75-89,555-569
node 5 size: 129015 MB
node 5 free: 128536 MB
node 6 cpus: 90-104,570-584
node 6 size: 129015 MB
node 6 free: 128601 MB
node 7 cpus: 105-119,585-599
node 7 size: 129015 MB
node 7 free: 128634 MB
node 8 cpus: 120-134,600-614
node 8 size: 129015 MB
node 8 free: 128690 MB
node 9 cpus: 135-149,615-629
node 9 size: 129015 MB
node 9 free: 128718 MB
node 10 cpus: 150-164,630-644
node 10 size: 129015 MB
node 10 free: 128637 MB
node 11 cpus: 165-179,645-659
node 11 size: 129015 MB
node 11 free: 128665 MB
node 12 cpus: 180-194,660-674
node 12 size: 129015 MB
node 12 free: 128563 MB
node 13 cpus: 195-209,675-689
node 13 size: 129015 MB
node 13 free: 128459 MB
node 14 cpus: 210-224,690-704
node 14 size: 128977 MB
node 14 free: 128473 MB
node 15 cpus: 225-239,705-719
node 15 size: 129015 MB
node 15 free: 128640 MB
node 16 cpus: 240-254,720-734
node 16 size: 129015 MB
node 16 free: 128430 MB
node 17 cpus: 255-269,735-749
node 17 size: 129015 MB
node 17 free: 128387 MB
node 18 cpus: 270-284,750-764
node 18 size: 129015 MB
node 18 free: 128340 MB
node 19 cpus: 285-299,765-779
node 19 size: 129015 MB
node 19 free: 128248 MB
node 20 cpus: 300-314,780-794
node 20 size: 129015 MB
node 20 free: 128620 MB
node 21 cpus: 315-329,795-809
node 21 size: 129015 MB
node 21 free: 128570 MB
node 22 cpus: 330-344,810-824
node 22 size: 129015 MB
node 22 free: 128759 MB
node 23 cpus: 345-359,825-839
```

(Continued on next page)

Platform Notes (Continued)

```
node 23 size: 129015 MB
node 23 free: 128722 MB
node 24 cpus: 360-374,840-854
node 24 size: 129015 MB
node 24 free: 128530 MB
node 25 cpus: 375-389,855-869
node 25 size: 129015 MB
node 25 free: 128417 MB
node 26 cpus: 390-404,870-884
node 26 size: 129015 MB
node 26 free: 128542 MB
node 27 cpus: 405-419,885-899
node 27 size: 129015 MB
node 27 free: 128388 MB
node 28 cpus: 420-434,900-914
node 28 size: 129015 MB
node 28 free: 128556 MB
node 29 cpus: 435-449,915-929
node 29 size: 129015 MB
node 29 free: 128551 MB
node 30 cpus: 450-464,930-944
node 30 size: 129015 MB
node 30 free: 128322 MB
node 31 cpus: 465-479,945-959
node 31 size: 128860 MB
node 31 free: 128366 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  1:  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  2:  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  3:  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  4:  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  5:  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  6:  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  7:  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  8:  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  9:  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
 10:  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 11:  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 12:  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 13:  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 14:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 15:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
    21  21  21  31  31  31  31
    16:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21
    21  21  21  31  31  31  31
    17:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21
    21  21  21  31  31  31  31
    18:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21
    21  21  21  31  31  31  31
    19:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21
    21  21  21  31  31  31  31
    20:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31
    31  31  31  21  21  21  21
    21:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31
    31  31  31  21  21  21  21
    22:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31
    31  31  31  21  21  21  21
    23:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31
    31  31  31  21  21  21  21
    24:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10
    12  12  12  21  21  21  21
    25:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
    10  12  12  21  21  21  21
    26:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
    12  10  12  21  21  21  21
    27:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
    12  12  10  21  21  21  21
    28:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  10  12  12  12
    29:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  10  12  12
    30:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  12  10  12
    31:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       4226715884 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jun 19 00:04

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix
                   purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                   smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
  indirect        systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=e1445b64-10ff-47e2-9082-84446e3c722f
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 519:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2026.0
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   893G  113G  780G  13% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR950 V3
    Product Family: ThinkSystem
    Serial:         JPBLR002

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
    3x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
    14x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
    46x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Lenovo
   BIOS Version:      EBE123G-7.50
   BIOS Date:         05/15/2026
   BIOS Revision:     7.50
   Firmware Revision: 7.10
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/latest/lib -lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AC.html
http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AC.xml
http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-18 12:08:27-0400.
Report generated on 2026-07-14 17:26:47 by CPU2017 PS formatter v6716.
Originally published on 2026-07-14.