



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint[®]2006 = 23.6

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECint_base2006 = 21.6

CPU2006 license: 13


Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

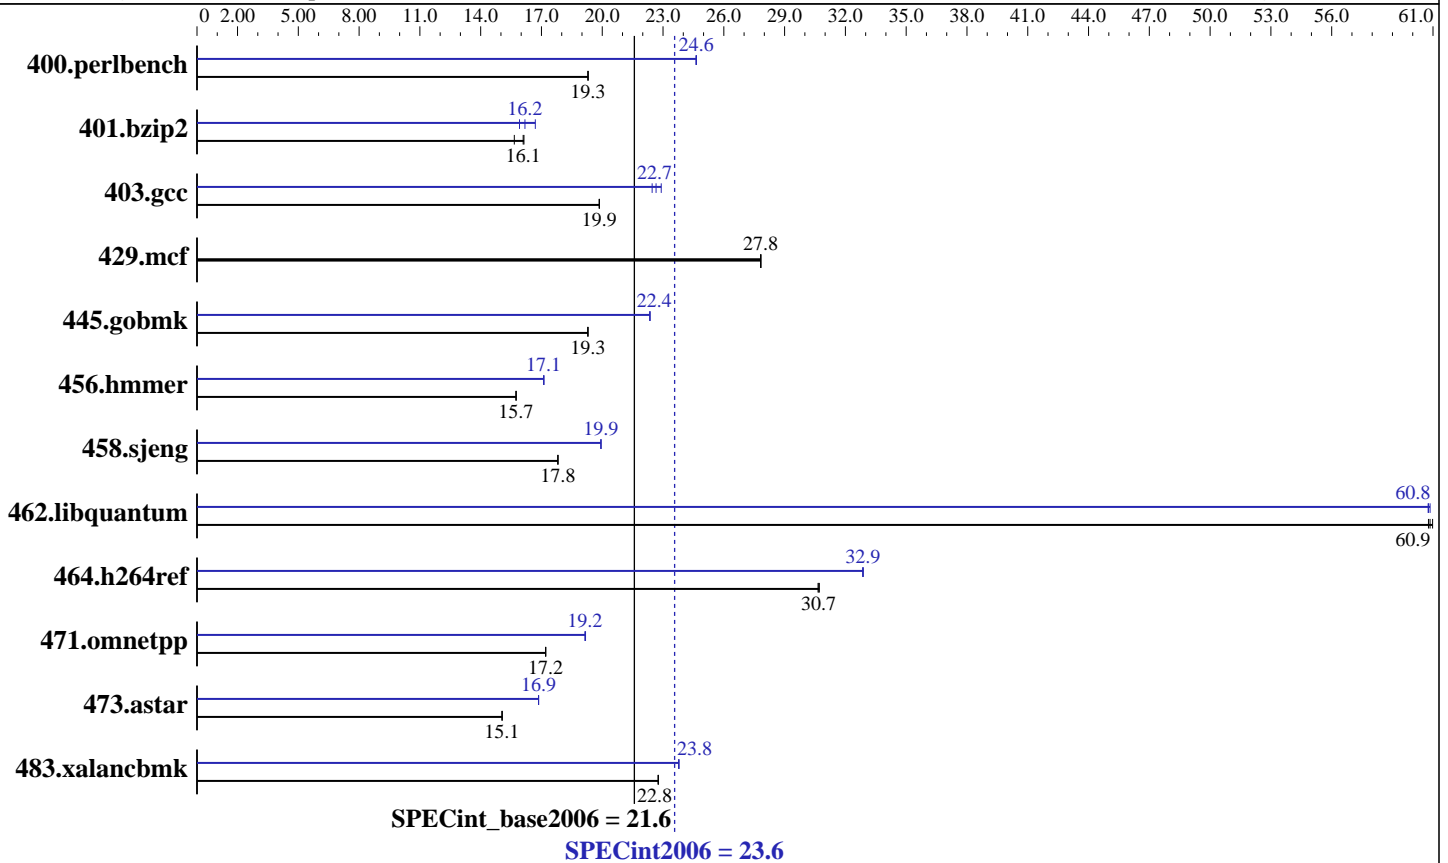

Hardware

CPU Name: Intel Core 2 Extreme QX6850
 CPU Characteristics: 3.00 GHz 1333 MHz FSB
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1GB Corsair TWIN3X2048-1333C9DHX DDR3-1333 CL9)
 Disk Subsystem: Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows Vista64 Ultimate
 Compiler: Intel C++ Compiler for IA32 version 10.1
 Build 20070913 Package ID: w_cc_p_10.1.011
 Microsoft Visual Studio 2005 SP1 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.6

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECint_base2006 = 21.6

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	507	19.3	506	19.3	506	19.3	397	24.6	396	24.6	396	24.7
401.bzip2	599	16.1	616	15.7	598	16.1	596	16.2	606	15.9	578	16.7
403.gcc	405	19.9	405	19.9	406	19.8	351	22.9	358	22.5	355	22.7
429.mcf	328	27.8	328	27.8	328	27.8	328	27.8	328	27.8	328	27.8
445.gobmk	544	19.3	544	19.3	544	19.3	469	22.4	469	22.4	469	22.3
456.hammer	592	15.8	593	15.7	592	15.7	545	17.1	545	17.1	545	17.1
458.sjeng	679	17.8	679	17.8	679	17.8	607	19.9	607	19.9	607	19.9
462.libquantum	340	60.9	340	61.0	341	60.8	340	60.9	341	60.8	341	60.8
464.h264ref	722	30.6	721	30.7	721	30.7	674	32.9	673	32.9	673	32.9
471.omnetpp	363	17.2	363	17.2	363	17.2	326	19.2	326	19.2	326	19.2
473.astar	466	15.1	466	15.1	466	15.1	417	16.9	416	16.9	416	16.9
483.xalancbmk	303	22.8	303	22.8	303	22.8	290	23.8	290	23.8	290	23.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 11/2007:

<http://www.asus.com/products.aspx?l1=3&l2=11&l3=572&l4=0&model=1872&modelmenu=1>

The system bus runs at 1333 MHz

System was configured with Asus EN8800GTX discrete graphics card

Binaries were built on Windows Vista32

The following VS 2005 SP1 updates were applied: KB926601 and KB932232

Base Compiler Invocation

C benchmarks:

```
icl -Qvc8 -Qc99
```

C++ benchmarks:

```
icl -Qvc8
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.6

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECint_base2006 = 21.6

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

-fast -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000
libguide40.lib

C++ benchmarks:

-fast -Qcxx_features /F512000000 shlw32m.lib libguide40.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qprefetch -Qparallel -Qpar-runtime-control /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
/F512000000 libguide40.lib

403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
libguide40.lib

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.6

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECint_base2006 = 21.6

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
-Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -Qopt-multi-version-aggressive /F512000000
libguide40.lib

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
/F512000000 libguide40.lib

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch
-Qopt-streaming-stores:always -Qparallel
-Qpar-runtime-control /F512000000 libguide40.lib

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias /F512000000 libguide40.lib

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=block -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=routine -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qcxx_features /F512000000 shlw32m.lib libguide40.lib
-link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.6

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECint_base2006 = 21.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:34:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.