



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 564

PowerEdge R910 (Intel Xeon E7540, 2.00 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55


Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: Jul-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

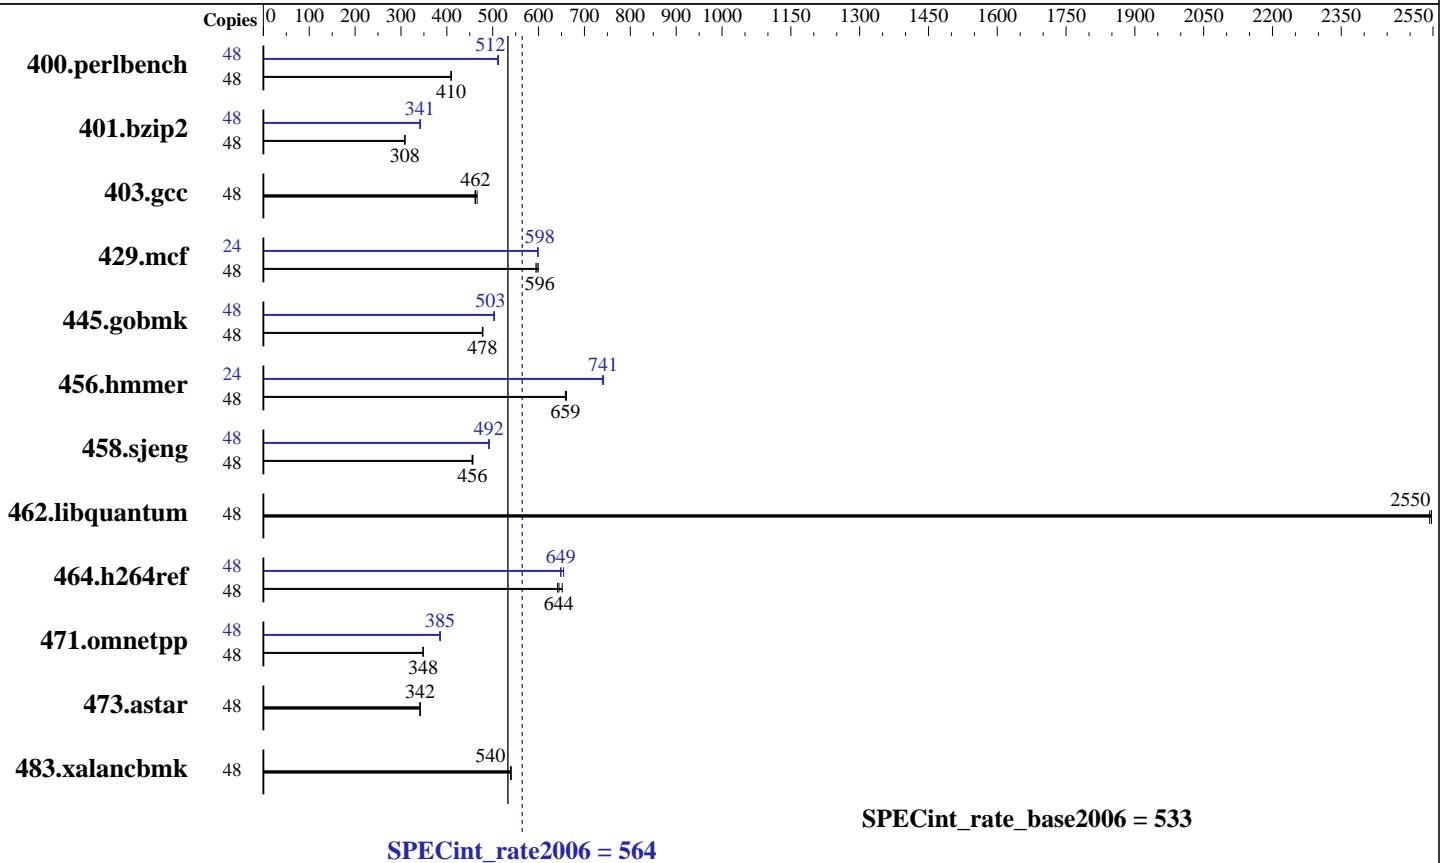

## Hardware

CPU Name: Intel Xeon E7540  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 18 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC)  
 Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 564

PowerEdge R910 (Intel Xeon E7540, 2.00 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Apr-2011  
Hardware Availability: Jul-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	<b>1145</b>	<b>410</b>	1145	410	1147	409	48	915	512	<b>915</b>	<b>512</b>	918	511
401.bzip2	48	1502	308	<b>1502</b>	<b>308</b>	1501	309	48	1357	341	<b>1357</b>	<b>341</b>	1352	343
403.gcc	48	829	466	837	462	<b>835</b>	<b>462</b>	48	829	466	837	462	<b>835</b>	<b>462</b>
429.mcf	48	731	599	<b>734</b>	<b>596</b>	737	594	24	<b>366</b>	<b>598</b>	366	598	366	599
445.gobmk	48	1052	479	1054	478	<b>1054</b>	<b>478</b>	48	999	504	1002	503	<b>1001</b>	<b>503</b>
456.hammer	48	680	658	678	661	<b>680</b>	<b>659</b>	24	303	739	302	742	<b>302</b>	<b>741</b>
458.sjeng	48	1276	455	<b>1275</b>	<b>456</b>	1271	457	48	<b>1181</b>	<b>492</b>	1179	493	1182	492
462.libquantum	48	391	2540	391	2550	<b>391</b>	<b>2550</b>	48	391	2540	391	2550	<b>391</b>	<b>2550</b>
464.h264ref	48	<b>1648</b>	<b>644</b>	1656	641	1630	652	48	<b>1637</b>	<b>649</b>	1640	648	1623	655
471.omnetpp	48	863	348	860	349	<b>861</b>	<b>348</b>	48	<b>778</b>	<b>385</b>	777	386	780	384
473.astar	48	987	341	<b>986</b>	<b>342</b>	985	342	48	987	341	<b>986</b>	<b>342</b>	985	342
483.xalancbmk	48	<b>613</b>	<b>540</b>	613	540	615	539	48	<b>613</b>	<b>540</b>	613	540	615	539

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 43200 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R910 model. Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 564

PowerEdge R910 (Intel Xeon E7540, 2.00 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: Jul-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 564

PowerEdge R910 (Intel Xeon E7540, 2.00 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Apr-2011  
Hardware Availability: Jul-2011  
Software Availability: Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 564

PowerEdge R910 (Intel Xeon E7540, 2.00 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: Jul-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/smartheap -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:43:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 May 2011.