



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5017C-MTF (X9SCL-F, Intel Xeon E3-1270)

SPECint®2006 = 47.8

SPECint_base2006 = 46.1

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

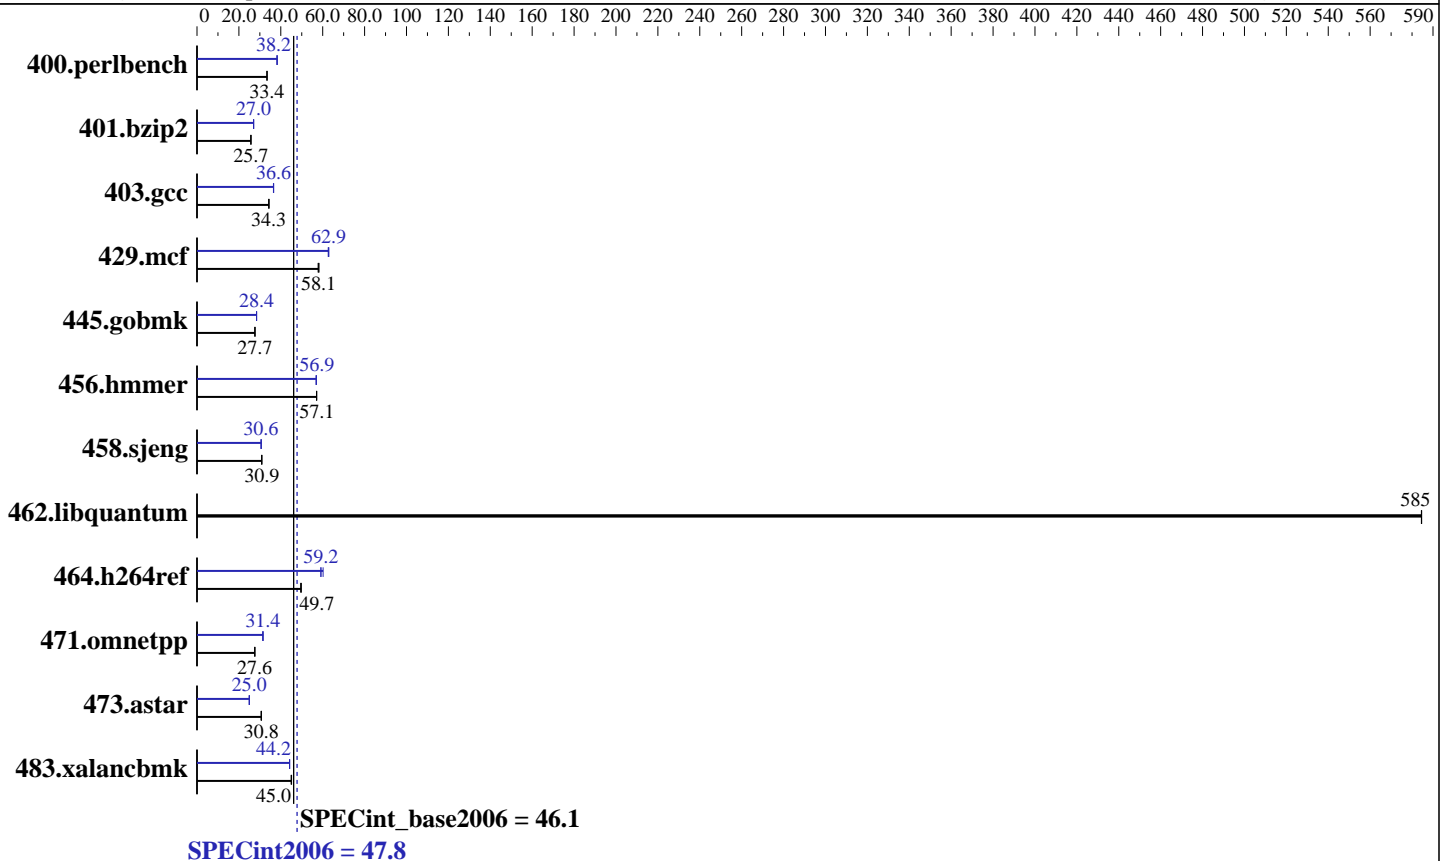

Hardware

CPU Name: Intel Xeon E3-1270
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 2000 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1
 Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications
 running on Intel 64
 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5017C-MTF (X9SCL-F, Intel Xeon E3-1270)

SPECint2006 = 47.8

SPECint_base2006 = 46.1

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	292	33.4	292	33.4	<u>292</u>	<u>33.4</u>	255	38.3	256	38.2	<u>256</u>	<u>38.2</u>
401.bzip2	<u>375</u>	<u>25.7</u>	375	25.7	375	25.7	357	27.1	<u>357</u>	<u>27.0</u>	358	27.0
403.gcc	<u>235</u>	<u>34.3</u>	235	34.3	234	34.4	220	36.6	<u>220</u>	<u>36.6</u>	221	36.5
429.mcf	<u>157</u>	<u>58.1</u>	158	57.8	157	58.1	145	62.9	<u>145</u>	<u>62.9</u>	146	62.6
445.gobmk	<u>379</u>	<u>27.7</u>	379	27.7	379	27.7	369	28.4	<u>369</u>	<u>28.4</u>	369	28.4
456.hammer	163	57.1	<u>163</u>	<u>57.1</u>	164	57.1	164	57.0	164	56.9	<u>164</u>	<u>56.9</u>
458.sjeng	391	31.0	392	30.8	<u>391</u>	<u>30.9</u>	395	30.6	395	30.7	<u>395</u>	<u>30.6</u>
462.libquantum	35.5	584	35.4	585	<u>35.4</u>	<u>585</u>	35.5	584	35.4	585	<u>35.4</u>	<u>585</u>
464.h264ref	447	49.5	445	49.7	<u>445</u>	<u>49.7</u>	374	59.1	368	60.2	<u>374</u>	<u>59.2</u>
471.omnetpp	226	27.6	227	27.6	<u>227</u>	<u>27.6</u>	<u>199</u>	<u>31.4</u>	198	31.6	199	31.4
473.astar	<u>228</u>	<u>30.8</u>	230	30.5	228	30.8	281	25.0	<u>281</u>	<u>25.0</u>	281	24.9
483.xalancbmk	<u>153</u>	<u>45.0</u>	153	45.2	153	45.0	<u>156</u>	<u>44.2</u>	156	44.2	156	44.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Hugepages was enabled with the following:
nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
```

Platform Notes

Fan speed set to Full Speed in BIOS Setup.

General Notes

OMP_NUM_THREADS set to number of cores
Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5017C-MTF (X9SCL-F, Intel Xeon E3-1270)

SPECint2006 = 47.8

SPECint_base2006 = 46.1

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5017C-MTF (X9SCL-F, Intel Xeon E3-1270)

SPECint2006 = 47.8

SPECint_base2006 = 46.1

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5017C-MTF (X9SCL-F, Intel Xeon E3-1270)

SPECint2006 = 47.8

SPECint_base2006 = 46.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/smartheap -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5017C-MTF (X9SCL-F, Intel Xeon E3-1270)

SPECint2006 = 47.8

SPECint_base2006 = 46.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:33:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.