



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint[®]_rate2006 = 434

NovaScale R450 F3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_rate_base2006 = 417

CPU2006 license: 20


Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

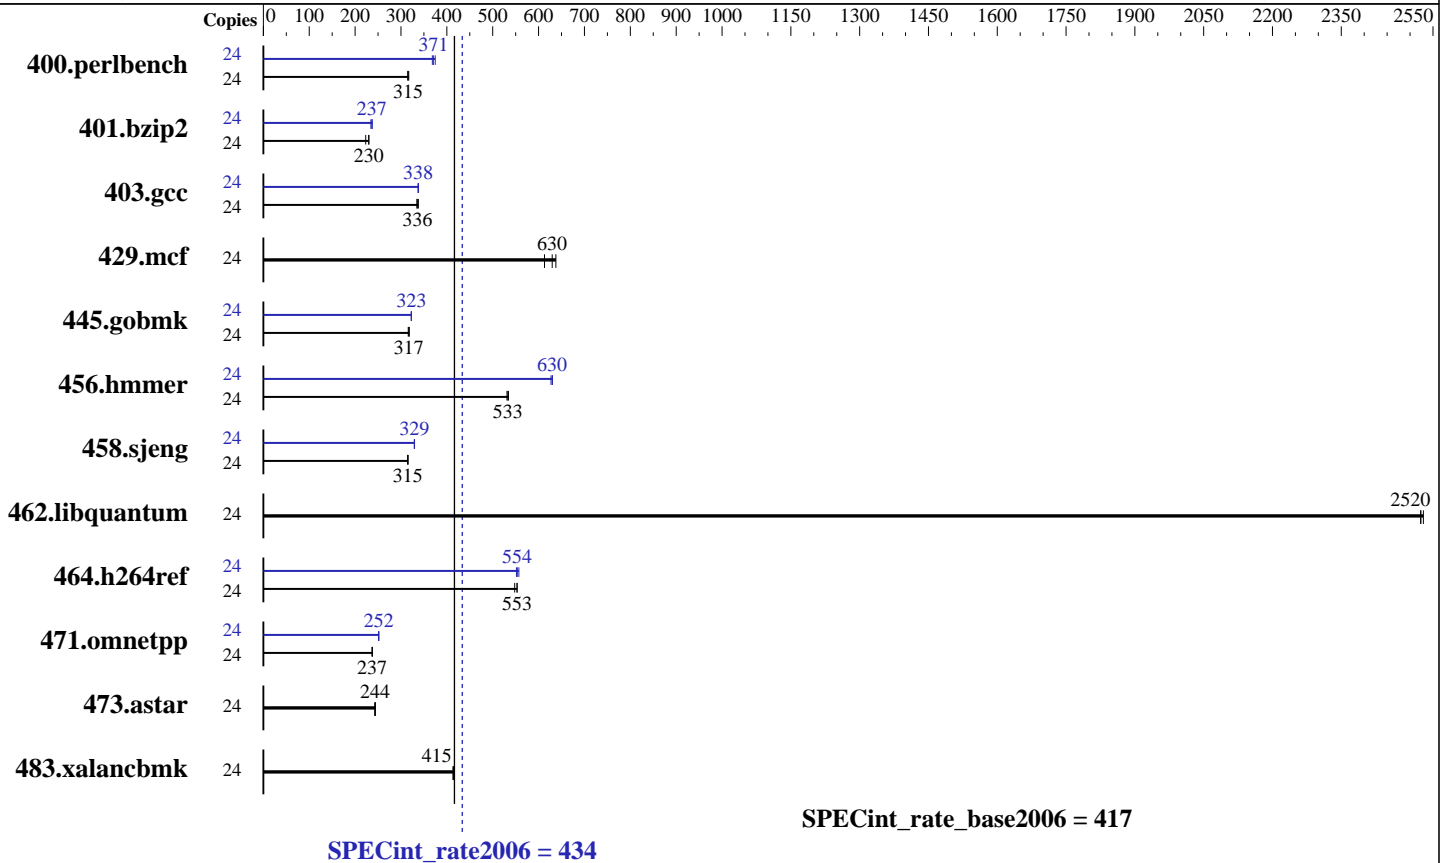

Hardware

CPU Name: Intel Xeon E5-2440
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 2 x 600 GB 15000 RPM SAS, RAID 1
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.9-default
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (add definition here)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 434

NovaScale R450 F3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_rate_base2006 = 417

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	740	317	745	315	<u>743</u>	<u>315</u>	24	<u>633</u>	<u>371</u>	637	368	626	375
401.bzip2	24	1038	223	<u>1009</u>	<u>230</u>	1006	230	24	976	237	<u>979</u>	<u>237</u>	988	234
403.gcc	24	572	338	577	335	<u>576</u>	<u>336</u>	24	<u>572</u>	<u>338</u>	573	337	571	338
429.mcf	24	357	613	<u>348</u>	<u>630</u>	343	638	24	357	613	<u>348</u>	<u>630</u>	343	638
445.gobmk	24	<u>794</u>	<u>317</u>	791	318	797	316	24	781	322	<u>780</u>	<u>323</u>	780	323
456.hammer	24	419	534	<u>420</u>	<u>533</u>	422	531	24	357	627	<u>356</u>	<u>630</u>	355	630
458.sjeng	24	<u>922</u>	<u>315</u>	921	315	923	315	24	882	329	<u>882</u>	<u>329</u>	881	330
462.libquantum	24	197	2520	197	2530	<u>197</u>	<u>2520</u>	24	197	2520	197	2530	<u>197</u>	<u>2520</u>
464.h264ref	24	960	553	<u>960</u>	<u>553</u>	969	548	24	953	557	963	552	<u>959</u>	<u>554</u>
471.omnetpp	24	632	237	<u>632</u>	<u>237</u>	632	237	24	597	251	<u>596</u>	<u>252</u>	596	252
473.astar	24	<u>692</u>	<u>244</u>	690	244	693	243	24	<u>692</u>	<u>244</u>	690	244	693	243
483.xalancbmk	24	399	415	<u>399</u>	<u>415</u>	401	413	24	399	415	<u>399</u>	<u>415</u>	401	413

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on Silk-2P Tue Mar 13 09:01:49 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2440 0 @ 2.40GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 434

NovaScale R450 F3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_rate_base2006 = 417

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      49381468 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux Silk-2P 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 13 08:37 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext3  493G   11G  457G   3% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Dell PowerEdge R520 and the Bull NovaScale R450 F3 models are electronically equivalent.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 434

NovaScale R450 F3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_rate_base2006 = 417

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

General Notes (Continued)

The results have been measured on a Dell PowerEdge R520 model

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 434

NovaScale R450 F3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_rate_base2006 = 417

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 434

NovaScale R450 F3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_rate_base2006 = 417

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:53:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.