



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint®2006 = 44.7

Cisco UCS C22 M3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_base2006 = 42.1

CPU2006 license: 9019


Test date: Jul-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

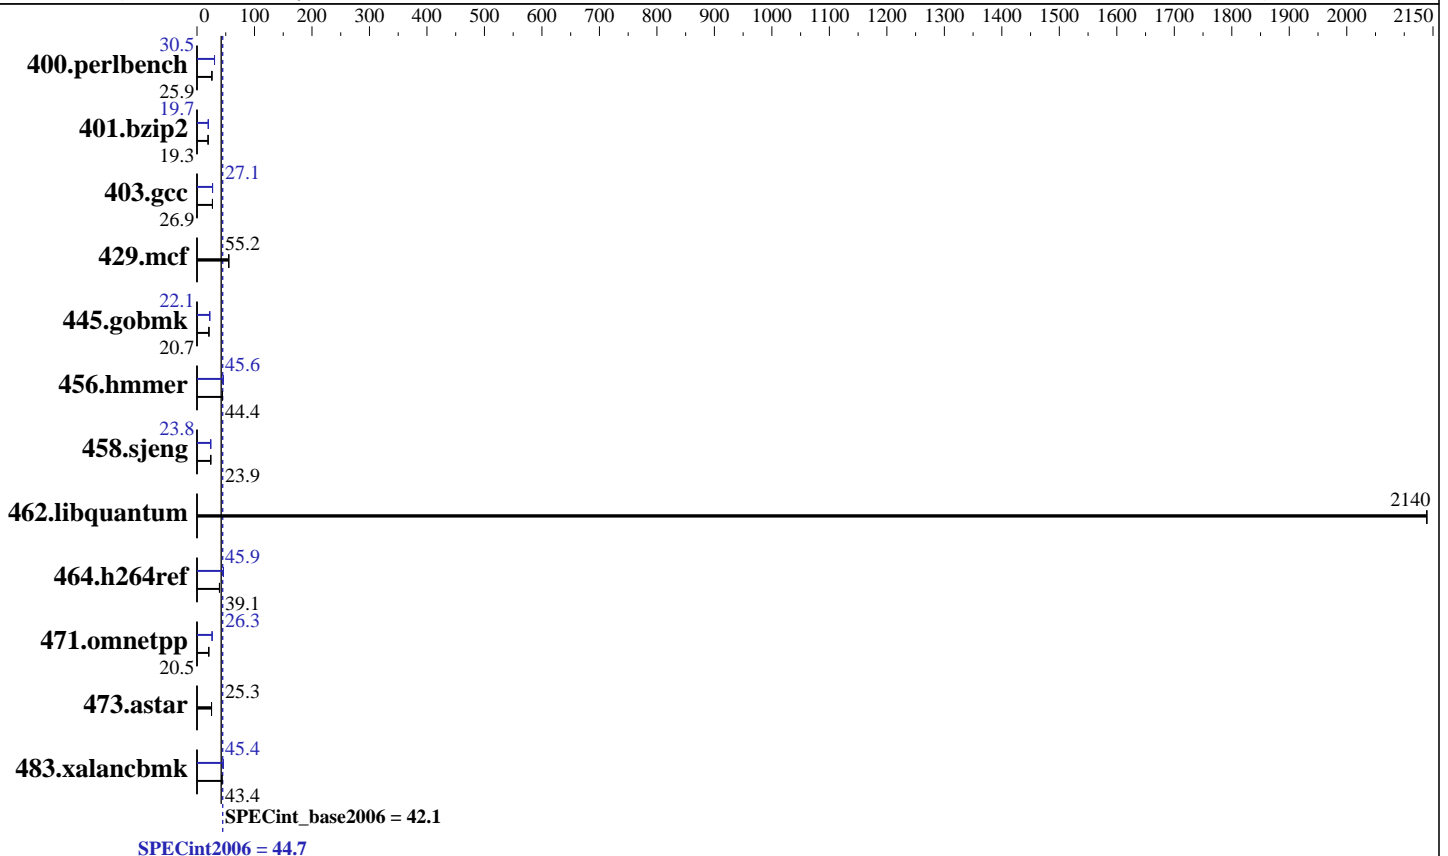

Hardware

CPU Name: Intel Xeon E5-2440
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 X 146 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 44.7

Cisco UCS C22 M3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_base2006 = 42.1

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jul-2012

Hardware Availability: Aug-2012

Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	377	25.9	<u>377</u>	<u>25.9</u>	377	25.9	<u>320</u>	<u>30.5</u>	320	30.5	321	30.4
401.bzip2	500	19.3	<u>500</u>	<u>19.3</u>	500	19.3	491	19.6	491	19.7	<u>491</u>	<u>19.7</u>
403.gcc	<u>299</u>	<u>26.9</u>	299	26.9	300	26.9	<u>297</u>	<u>27.1</u>	298	27.0	297	27.1
429.mcf	165	55.4	165	55.1	<u>165</u>	<u>55.2</u>	165	55.4	165	55.1	<u>165</u>	<u>55.2</u>
445.gobmk	<u>506</u>	<u>20.7</u>	505	20.8	506	20.7	474	22.1	<u>474</u>	<u>22.1</u>	474	22.1
456.hammer	210	44.4	211	44.3	<u>210</u>	<u>44.4</u>	205	45.6	205	45.6	<u>205</u>	<u>45.6</u>
458.sjeng	<u>506</u>	<u>23.9</u>	505	23.9	506	23.9	<u>507</u>	<u>23.8</u>	508	23.8	507	23.9
462.libquantum	9.69	2140	9.69	2140	<u>9.69</u>	<u>2140</u>	9.69	2140	9.69	2140	<u>9.69</u>	<u>2140</u>
464.h264ref	568	39.0	566	39.1	<u>566</u>	<u>39.1</u>	482	45.9	<u>482</u>	<u>45.9</u>	480	46.1
471.omnetpp	305	20.5	<u>305</u>	<u>20.5</u>	306	20.4	238	26.3	<u>237</u>	<u>26.3</u>	237	26.3
473.astar	278	25.2	277	25.4	<u>278</u>	<u>25.3</u>	278	25.2	277	25.4	<u>278</u>	<u>25.3</u>
483.xalancbmk	<u>159</u>	<u>43.4</u>	159	43.4	159	43.4	152	45.4	151	45.6	<u>152</u>	<u>45.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Sun Jul 1 14:56:56 2012

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2440 0 @ 2.40GHz
 2 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal: 99042468 kB

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 44.7

Cisco UCS C22 M3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_base2006 = 42.1

CPU2006 license: 9019

Test date: Jul-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 1 14:46
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1       ext4      134G  10G  118G   8% /
```

Additional information from dmidecode:

```
Memory:
12x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "12"
```

Intel HT Technology = disable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 44.7

Cisco UCS C22 M3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_base2006 = 42.1

CPU2006 license: 9019

Test date: Jul-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 44.7

Cisco UCS C22 M3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_base2006 = 42.1

CPU2006 license: 9019

Test date: Jul-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
           -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
          -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
         -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 44.7

Cisco UCS C22 M3 (Intel Xeon E5-2440, 2.40 GHz)

SPECint_base2006 = 42.1

CPU2006 license: 9019

Test date: Jul-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:49:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 July 2012.