



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint®_rate2006 = 175

Altos T310 F3 (Intel Xeon E3-1220 v3)

SPECint_rate_base2006 = 168

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Sep-2013

Software Availability: Feb-2013

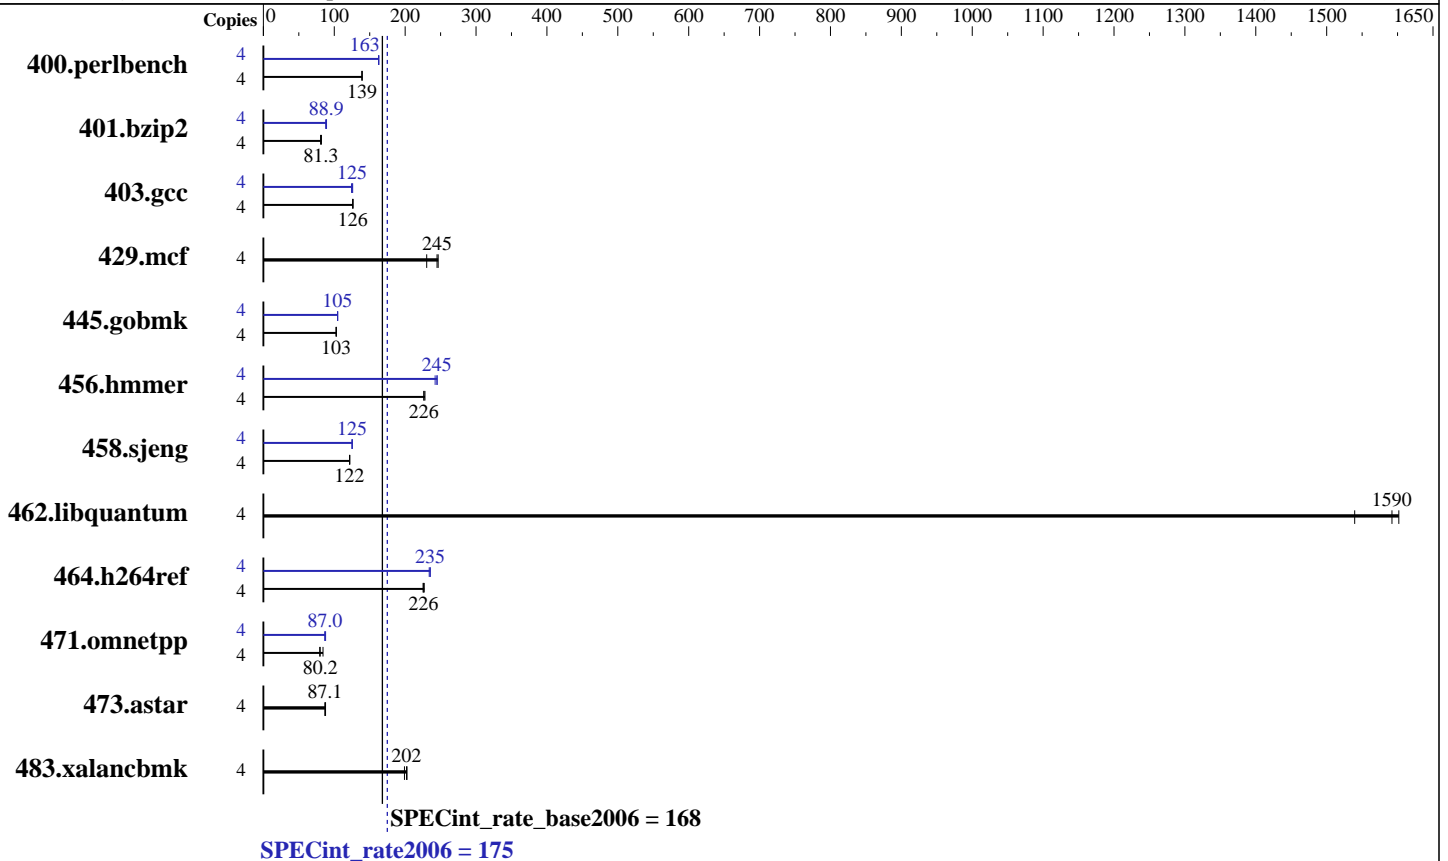

Hardware

CPU Name: Intel Xeon E3-1220 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx4 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 175

Altos T310 F3 (Intel Xeon E3-1220 v3)

SPECint_rate_base2006 = 168

CPU2006 license: 97

Test date: May-2013

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2013

Tested by: Acer Incorporated

Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<u>281</u>	<u>139</u>	281	139	281	139	4	240	163	240	163	<u>240</u>	<u>163</u>
401.bzip2	4	<u>475</u>	<u>81.3</u>	471	81.9	478	80.7	4	439	87.9	433	89.1	<u>434</u>	<u>88.9</u>
403.gcc	4	255	126	<u>255</u>	<u>126</u>	255	126	4	<u>257</u>	<u>125</u>	259	124	256	126
429.mcf	4	158	230	<u>149</u>	<u>245</u>	148	247	4	158	230	<u>149</u>	<u>245</u>	148	247
445.gobmk	4	<u>408</u>	<u>103</u>	408	103	408	103	4	401	105	<u>401</u>	<u>105</u>	400	105
456.hammer	4	164	228	<u>165</u>	<u>226</u>	165	226	4	<u>152</u>	<u>245</u>	152	245	154	242
458.sjeng	4	397	122	<u>398</u>	<u>122</u>	398	122	4	386	125	387	125	<u>387</u>	<u>125</u>
462.libquantum	4	<u>52.1</u>	<u>1590</u>	53.8	1540	51.7	1600	4	<u>52.1</u>	<u>1590</u>	53.8	1540	51.7	1600
464.h264ref	4	390	227	<u>392</u>	<u>226</u>	393	225	4	376	235	<u>376</u>	<u>235</u>	378	234
471.omnetpp	4	315	79.5	<u>312</u>	<u>80.2</u>	297	84.1	4	<u>287</u>	<u>87.0</u>	285	87.8	288	86.7
473.astar	4	<u>323</u>	<u>87.1</u>	323	86.9	320	87.7	4	<u>323</u>	<u>87.1</u>	323	86.9	320	87.7
483.xalancbmk	4	139	199	136	203	<u>137</u>	<u>202</u>	4	139	199	136	203	<u>137</u>	<u>202</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on speccputest Fri May 31 20:13:11 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1220 v3 @ 3.10GHz
1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 175

Altos T310 F3 (Intel Xeon E3-1220 v3)

SPECint_rate_base2006 = 168

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Sep-2013

Software Availability: Feb-2013

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16289252 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux speccputest 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 31 20:11
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        ext4      413G  5.5G  386G   2% /
```

```
Additional information from dmidecode:
BIOS Acer                      D05 05/27/2013
Memory:
 2x 8 GB
 2x Kingston ACR16D3LE1EFG/8G 8 GB 1600 MHz 2 rank
 2x [Empty] [Empty]
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 175

Altos T310 F3 (Intel Xeon E3-1220 v3)

SPECint_rate_base2006 = 168

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Sep-2013

Software Availability: Feb-2013

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 175

Altos T310 F3 (Intel Xeon E3-1220 v3)

SPECint_rate_base2006 = 168

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Sep-2013

Software Availability: Feb-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 175

Altos T310 F3 (Intel Xeon E3-1220 v3)

SPECint_rate_base2006 = 168

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: Sep-2013

Software Availability: Feb-2013

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130716.html>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130716.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130716.xml>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130716.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:28:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 July 2013.