



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF (X10SLM-F, Intel Xeon E3-1240 v3, 3.40 GHz)

SPECint®_rate2006 = 214

SPECint_rate_base2006 = 207

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

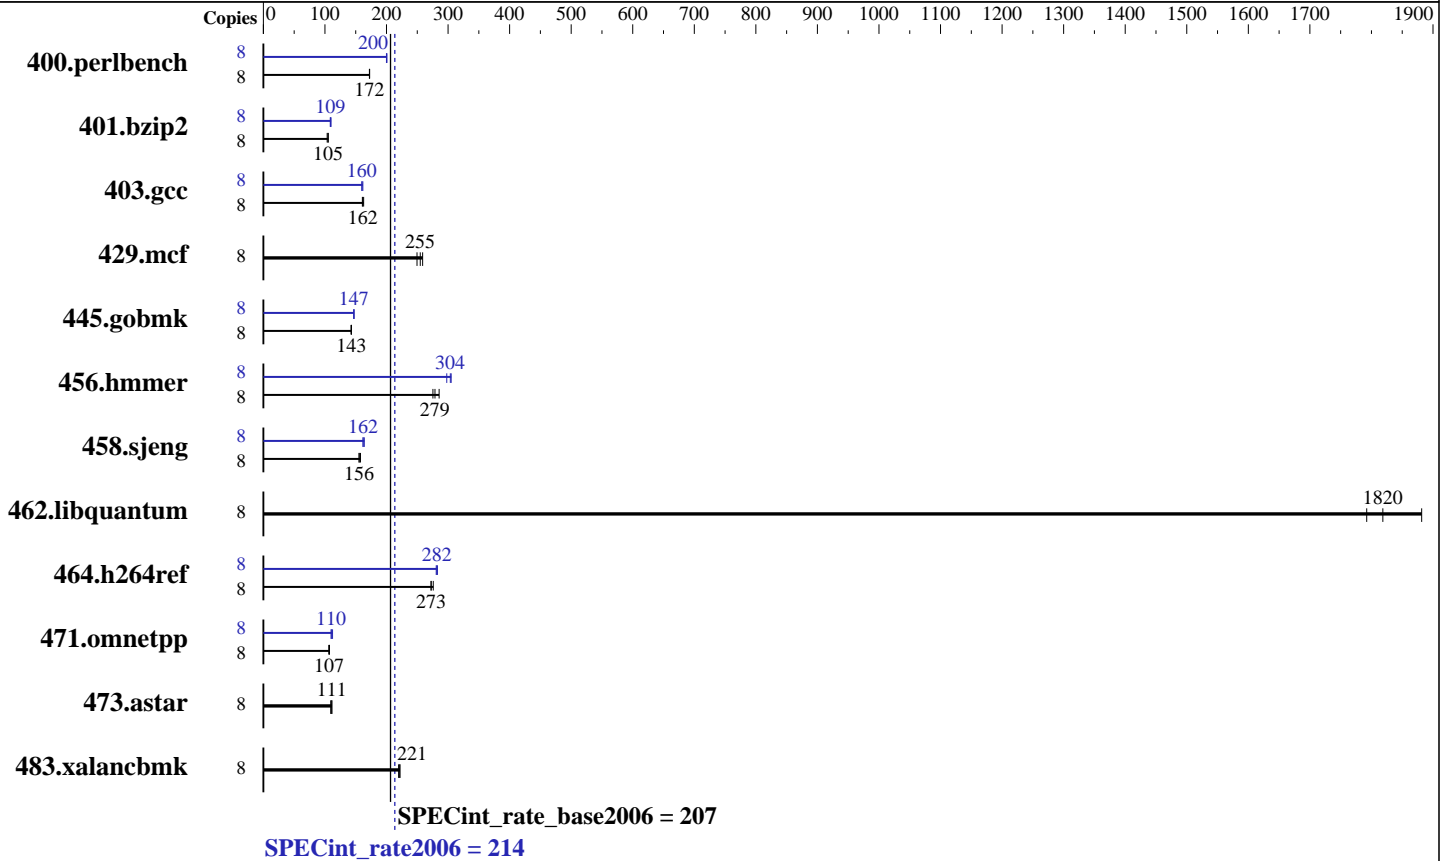

Hardware

CPU Name: Intel Xeon E3-1240 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF (X10SLM-F, Intel Xeon E3-1240 v3, 3.40 GHz)

SPECint_rate2006 = 214

SPECint_rate_base2006 = 207

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2013
Hardware Availability: Jun-2013
Software Availability: May-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	453	173	<u>453</u>	<u>172</u>	454	172	8	390	200	<u>390</u>	<u>200</u>	391	200
401.bzip2	8	<u>735</u>	<u>105</u>	733	105	745	104	8	702	110	<u>708</u>	<u>109</u>	711	109
403.gcc	8	401	161	395	163	<u>399</u>	<u>162</u>	8	399	162	402	160	<u>402</u>	<u>160</u>
429.mcf	8	282	259	<u>286</u>	<u>255</u>	292	250	8	282	259	<u>286</u>	<u>255</u>	292	250
445.gobmk	8	587	143	590	142	<u>587</u>	<u>143</u>	8	<u>570</u>	<u>147</u>	571	147	570	147
456.hammer	8	261	285	<u>268</u>	<u>279</u>	271	275	8	251	298	245	305	<u>246</u>	<u>304</u>
458.sjeng	8	622	156	<u>622</u>	<u>156</u>	614	158	8	<u>597</u>	<u>162</u>	598	162	590	164
462.libquantum	8	88.1	1880	<u>91.1</u>	<u>1820</u>	92.5	1790	8	88.1	1880	<u>91.1</u>	<u>1820</u>	92.5	1790
464.h264ref	8	642	276	<u>650</u>	<u>273</u>	650	272	8	631	281	626	283	<u>629</u>	<u>282</u>
471.omnetpp	8	470	106	<u>467</u>	<u>107</u>	466	107	8	<u>453</u>	<u>110</u>	445	112	454	110
473.astar	8	514	109	505	111	<u>506</u>	<u>111</u>	8	514	109	505	111	<u>506</u>	<u>111</u>
483.xalancbmk	8	249	222	<u>249</u>	<u>221</u>	251	220	8	249	222	<u>249</u>	<u>221</u>	251	220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF (X10SLM-F, Intel Xeon E3-1240 v3, 3.40 GHz)

SPECint_rate2006 = 214

SPECint_rate_base2006 = 207

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF (X10SLM-F, Intel Xeon E3-1240 v3, 3.40 GHz)

SPECint_rate2006 = 214

SPECint_rate_base2006 = 207

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF (X10SLM-F, Intel Xeon E3-1240 v3, 3.40 GHz)

SPECint_rate2006 = 214

SPECint_rate_base2006 = 207

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:37:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 July 2013.