



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 804

PRIMERGY RX2540 M1, Intel Xeon E5-2680 v3, 2.5 GHz

SPECfp_rate_base2006 = 781

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

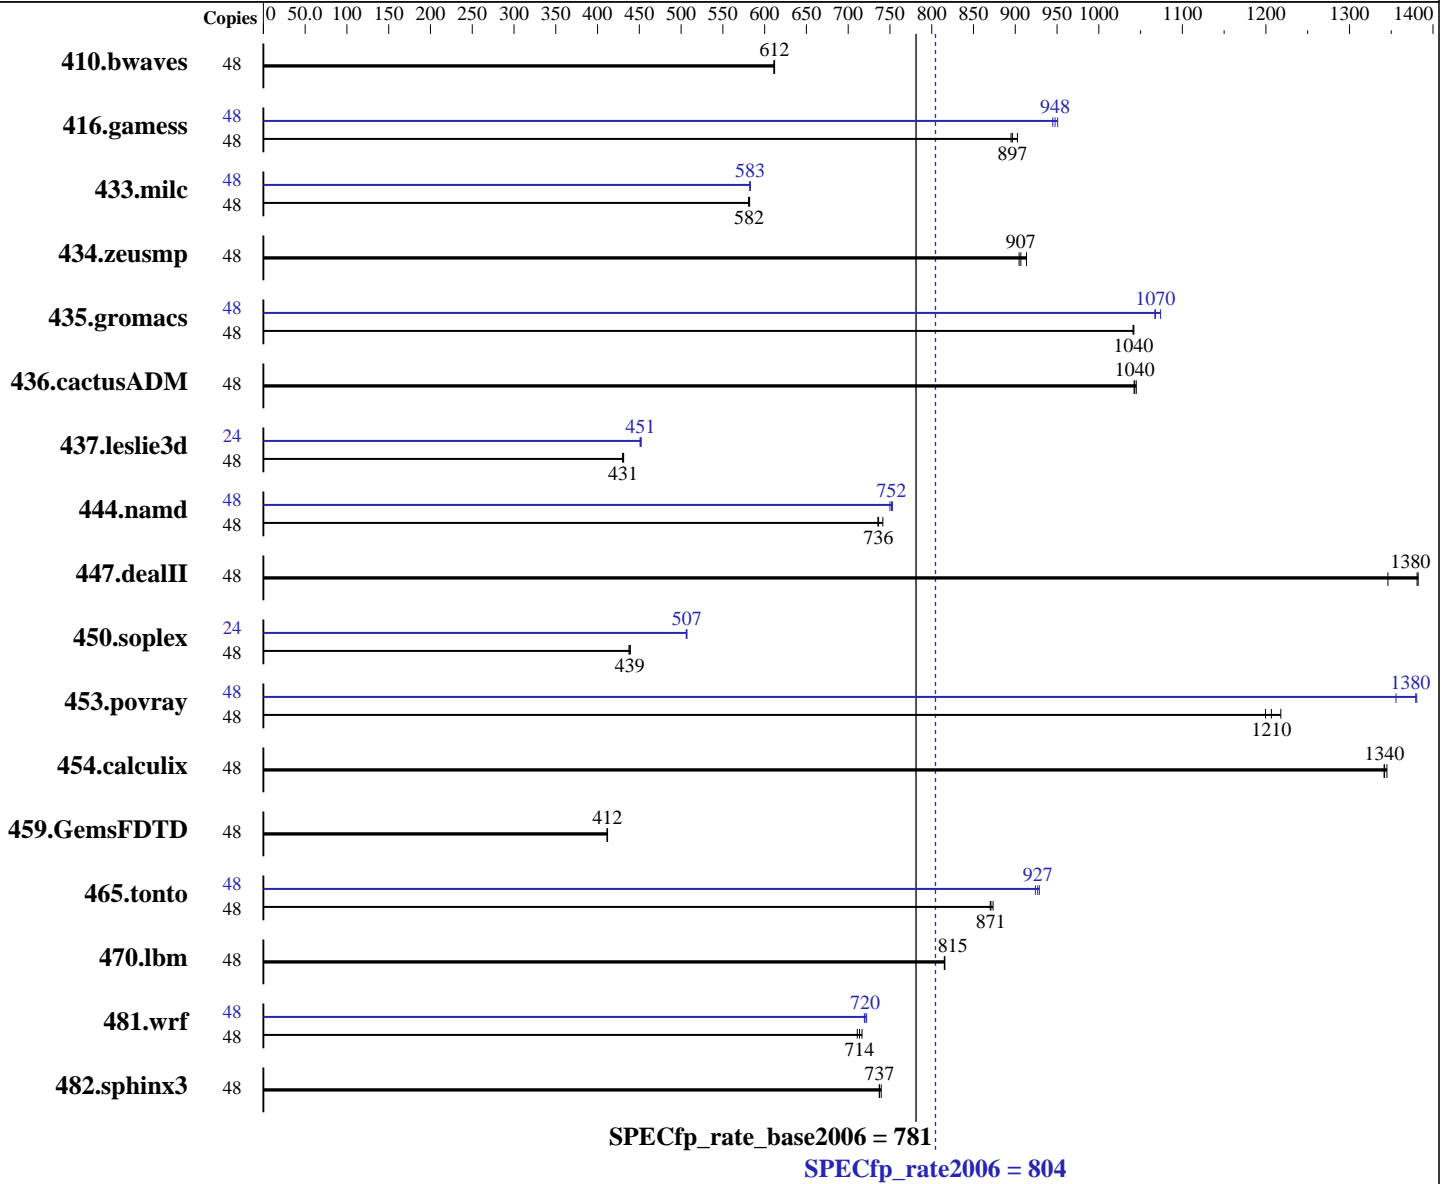

Hardware

CPU Name: Intel Xeon E5-2680 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 Kernel 3.10.0-123.8.1.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = **804**

PRIMERGY RX2540 M1, Intel Xeon E5-2680 v3, 2.5 GHz

SPECfp_rate_base2006 = **781**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1066	612	1066	612	1068	611	48	1066	612	1066	612	1068	611
416.gamess	48	1050	895	1048	897	1041	903	48	989	951	995	945	992	948
433.milc	48	759	581	758	582	757	582	48	756	583	757	582	756	583
434.zeusmp	48	478	913	482	907	483	905	48	478	913	482	907	483	905
435.gromacs	48	329	1040	329	1040	329	1040	48	321	1070	319	1070	321	1070
436.cactusADM	48	550	1040	549	1040	550	1040	48	550	1040	549	1040	550	1040
437.leslie3d	48	1046	431	1048	431	1050	430	24	499	452	500	451	500	451
444.namd	48	519	741	523	736	523	736	48	512	752	511	753	513	750
447.dealII	48	397	1380	398	1380	408	1350	48	397	1380	398	1380	408	1350
450.soplex	48	911	439	915	438	913	439	24	395	507	395	506	395	507
453.povray	48	213	1200	210	1220	212	1210	48	188	1360	185	1380	185	1380
454.calculix	48	294	1340	295	1340	295	1340	48	294	1340	295	1340	295	1340
459.GemsFDTD	48	1237	412	1238	411	1236	412	48	1237	412	1238	411	1236	412
465.tonto	48	541	873	542	871	543	870	48	511	924	510	927	509	929
470.lbm	48	809	815	808	816	809	815	48	809	815	808	816	809	815
481.wrf	48	751	714	754	711	748	717	48	743	722	745	719	744	720
482.sphinx3	48	1265	740	1269	737	1269	737	48	1265	740	1269	737	1269	737

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Energy Performance = Performance
QPI snoop mode: Cluster on Die

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 804

PRIMERGY RX2540 M1, Intel Xeon E5-2680 v3, 2.5 GHz

SPECfp_rate_base2006 = 781

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

COD Enable = Enabled, Early Snoop = Disabled
CPU C1E Support = Disabled
QPI Link Frequency Select = 6.4 GT/s

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 804

PRIMERGY RX2540 M1, Intel Xeon E5-2680 v3, 2.5 GHz

SPECfp_rate_base2006 = 781

CPU2006 license: 19

Test date: Dec-2014

Test sponsor: Fujitsu

Hardware Availability: Sep-2014

Tested by: Fujitsu

Software Availability: Sep-2014

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 804

PRIMERGY RX2540 M1, Intel Xeon E5-2680 v3, 2.5 GHz

SPECfp_rate_base2006 = 781

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
          -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 804

PRIMERGY RX2540 M1, Intel Xeon E5-2680 v3, 2.5 GHz

SPECfp_rate_base2006 = 781

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 14 10:26:07 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 January 2015.