



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7800B with Radeon R7 Graphics)

SPECint®\_rate2006 = 91.8

SPECint\_rate\_base2006 = 87.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

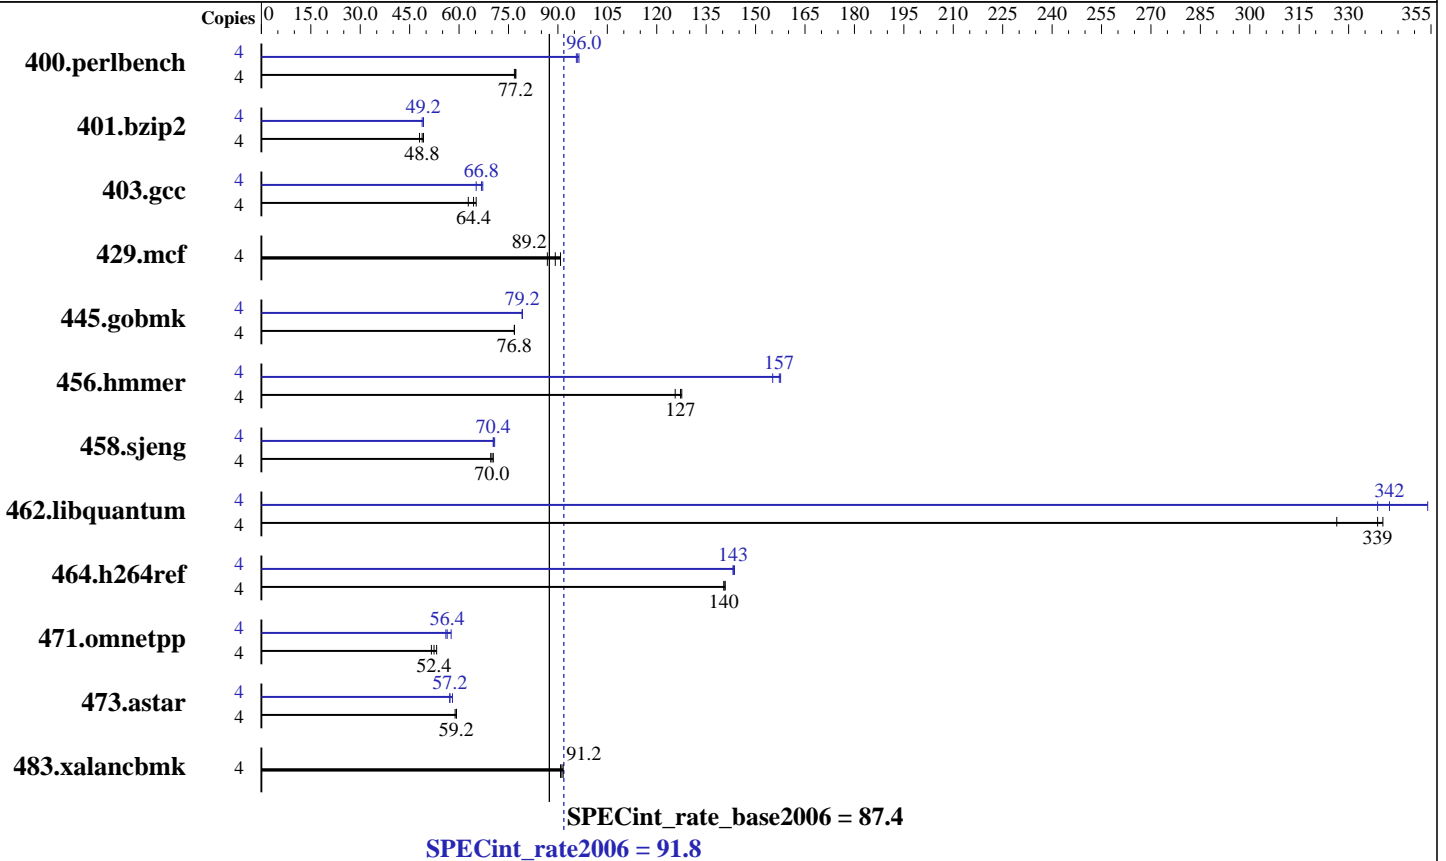

## Hardware

CPU Name: AMD A10 PRO-7800B  
 CPU Characteristics: AMD Turbo CORE technology up to 3.90 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-11)  
 Disk Subsystem: Seagate Barracuda 250 GB SATA, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Microsoft Windows 7 Ultimate 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 11.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7800B with Radeon R7 Graphics)

SPECint\_rate2006 = 91.8

SPECint\_rate\_base2006 = 87.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	508	76.8	506	77.2	<b>506</b>	<b>77.2</b>	4	410	95.6	405	96.4	<b>407</b>	<b>96.0</b>
401.bzip2	4	787	49.2	802	48.0	<b>794</b>	<b>48.8</b>	4	790	48.8	782	49.2	<b>786</b>	<b>49.2</b>
403.gcc	4	495	65.2	<b>501</b>	<b>64.4</b>	514	62.8	4	<b>481</b>	<b>66.8</b>	495	65.2	480	67.2
429.mcf	4	420	86.8	402	90.8	<b>409</b>	<b>89.2</b>	4	420	86.8	402	90.8	<b>409</b>	<b>89.2</b>
445.gobmk	4	546	76.8	<b>547</b>	<b>76.8</b>	548	76.8	4	<b>530</b>	<b>79.2</b>	530	79.2	530	79.2
456.hammer	4	297	126	<b>293</b>	<b>127</b>	293	128	4	241	155	<b>238</b>	<b>157</b>	237	158
458.sjeng	4	689	70.4	697	69.6	<b>691</b>	<b>70.0</b>	4	<b>686</b>	<b>70.4</b>	684	70.8	686	70.4
462.libquantum	4	254	326	244	340	<b>245</b>	<b>339</b>	4	245	339	<b>242</b>	<b>342</b>	234	354
464.h264ref	4	<b>630</b>	<b>140</b>	629	141	630	140	4	617	144	<b>618</b>	<b>143</b>	618	143
471.omnetpp	4	484	51.6	470	53.2	<b>476</b>	<b>52.4</b>	4	448	56.0	<b>444</b>	<b>56.4</b>	434	57.6
473.astar	4	477	58.8	<b>473</b>	<b>59.2</b>	473	59.2	4	<b>493</b>	<b>57.2</b>	493	57.2	485	58.0
483.xalancbmk	4	304	90.8	<b>303</b>	<b>91.2</b>	302	91.6	4	304	90.8	<b>303</b>	<b>91.2</b>	302	91.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 16.0 was set up to generate 32-bit binaries with the command:  
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2016 program folder)

## Platform Notes

Sysinfo program C:\SPEC16.0\Docs\sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on CltE03F49ACBFDE Sat Jul 2 20:30:26 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Ultimate
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)  : 1 Processor(s) Installed.
               [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3500 Mhz
BIOS Version  : American Megatrends Inc. 2502, 12/11/2015
Total Physical Memory: 7,108 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7800B with Radeon R7 Graphics)

SPECint\_rate2006 = 91.8

SPECint\_rate\_base2006 = 87.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

## Platform Notes (Continued)

L2CacheSize : 25359  
L3CacheSize : 0  
MaxClockSpeed : 3500  
Name : AMD A10 PRO-7800B R7, 12 Compute Cores 4C+8G  
NumberOfCores : 2  
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU  
+ 64GB memory using Windows 8.1 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:  
icl -Qvc12 -Qstd=c99

C++ benchmarks:  
icl -Qvc12

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DWIN32  
483.xalancmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

C++ benchmarks:  
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F256000000 shlw32M.lib -link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7800B with Radeon R7 Graphics)

**SPECint\_rate2006 = 91.8**

**SPECint\_rate\_base2006 = 87.4**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jul-2016

**Hardware Availability:** Jul-2014

**Software Availability:** Aug-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc12 -Qstd=c99

456.hmmr: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe  
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc12

473.astar: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
456.hmmr: -DSPEC\_CPU\_P64  
458.sjeng: -DSPEC\_CPU\_P64  
462.libquantum: -DSPEC\_CPU\_P64  
464.h264ref: -DWIN32  
473.astar: -DSPEC\_CPU\_P64  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

400.perlbench: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F256000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzp2: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F256000000

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7800B with Radeon R7 Graphics)

SPECint\_rate2006 = 91.8

SPECint\_rate\_base2006 = 87.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2016

Hardware Availability: Jul-2014

Software Availability: Aug-2015

## Peak Optimization Flags (Continued)

403.gcc: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F256000000

456.hmmer: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)  
-Qopt-prefetch(1) /F256000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)  
-Qunroll4(1) /F256000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F256000000

464.h264ref: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F256000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F256000000 shlW32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F256000000 shlW64M.lib

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

456hmmer -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041\compilers\_and\_libraries\_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64  
458sjeng -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041\compilers\_and\_libraries\_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64  
462libquantum -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041\compilers\_and\_libraries\_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
(Test Sponsor: Intel Corporation)

**SPECint\_rate2006 = 91.8**

ASUS A88X-PRO Motherboard (AMD A10 PRO-7800B with Radeon R7 Graphics)

**SPECint\_rate\_base2006 = 87.4**

**CPU2006 license:** 13  
**Test sponsor:** Intel Corporation  
**Tested by:** Intel Corporation

**Test date:** Jul-2016  
**Hardware Availability:** Jul-2014  
**Software Availability:** Aug-2015

## Peak Other Flags (Continued)

C++ benchmarks:

```
473.exe -link /FORCE:MULTIPLE -link -LIBPATH:C:\Program Files (x86)\Intel\IntelTool\parallel_studio_w_2016.0.04\compiler_and_libraries_2016\windows\compiler\lib\intel64 -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
```

```
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Sep 20 15:06:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 September 2016.