



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint®_rate2006 = 1310

Inspur SA5112M4 (Intel Xeon E5-2680 v4)

SPECint_rate_base2006 = 1260

CPU2006 license: 3358


Test date: Feb-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

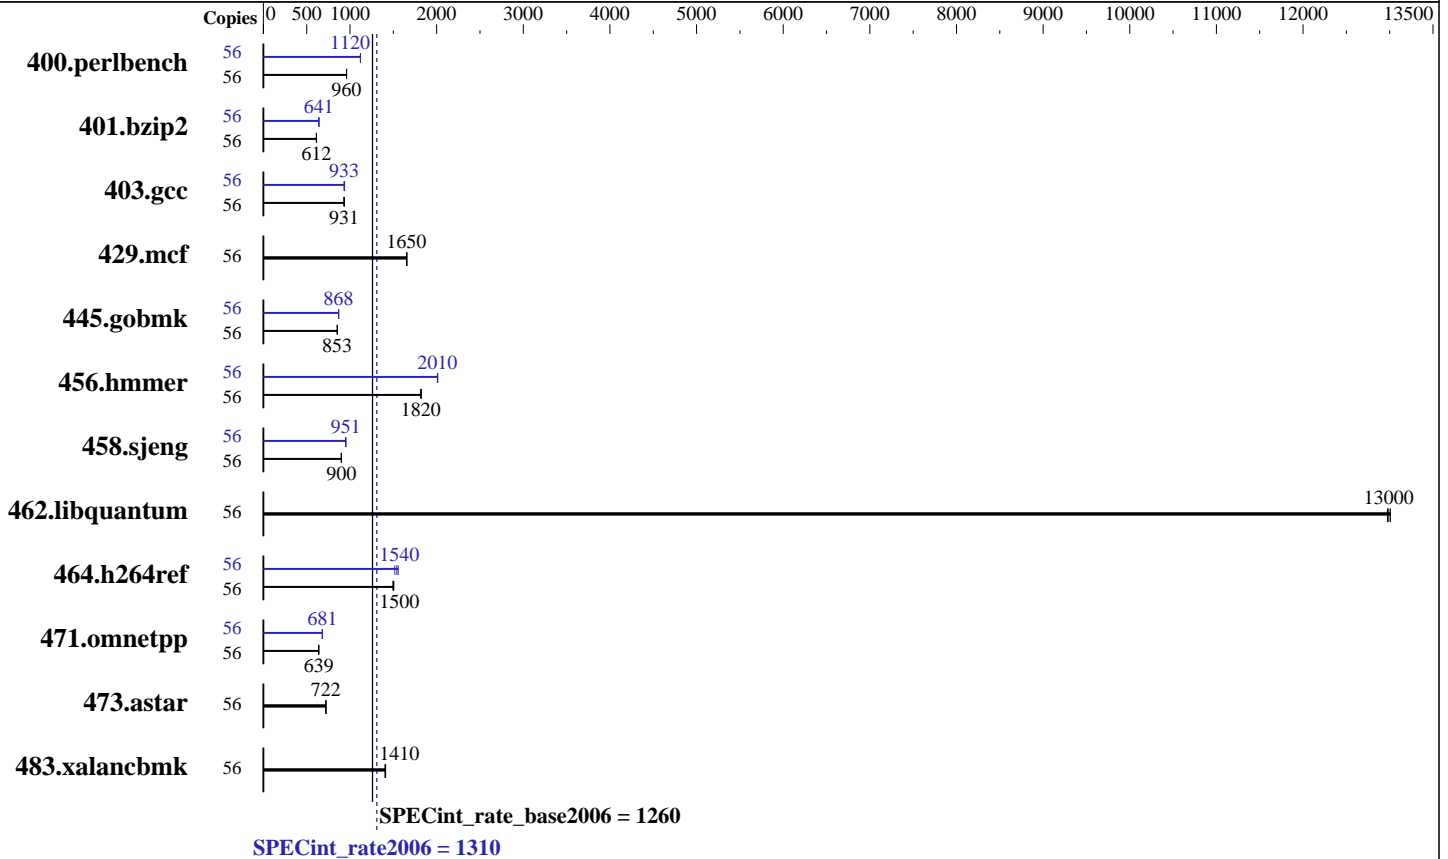

Hardware

CPU Name: Intel Xeon E5-2680 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 450 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Compiler: 3.10.0-327.el7.x86_64 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 1310

Inspur SA5112M4 (Intel Xeon E5-2680 v4)

SPECint_rate_base2006 = 1260

CPU2006 license: 3358

Test date: Feb-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	570	959	569	961	<u>570</u>	<u>960</u>	56	489	1120	488	1120	<u>488</u>	<u>1120</u>
401.bzip2	56	883	612	882	613	<u>883</u>	<u>612</u>	56	844	640	<u>843</u>	<u>641</u>	843	641
403.gcc	56	<u>484</u>	<u>931</u>	485	929	482	936	56	<u>483</u>	<u>933</u>	481	937	483	933
429.mcf	56	308	1660	<u>309</u>	<u>1650</u>	309	1650	56	308	1660	<u>309</u>	<u>1650</u>	309	1650
445.gobmk	56	689	852	688	854	<u>689</u>	<u>853</u>	56	677	868	676	869	<u>677</u>	<u>868</u>
456.hammer	56	287	1820	288	1820	<u>287</u>	<u>1820</u>	56	259	2010	260	2010	<u>260</u>	<u>2010</u>
458.sjeng	56	753	900	753	900	<u>753</u>	<u>900</u>	56	712	952	713	950	<u>713</u>	<u>951</u>
462.libquantum	56	<u>89.3</u>	<u>13000</u>	89.2	13000	89.4	13000	56	<u>89.3</u>	<u>13000</u>	89.2	13000	89.4	13000
464.h264ref	56	823	1510	829	1490	<u>825</u>	<u>1500</u>	56	817	1520	<u>804</u>	<u>1540</u>	796	1560
471.omnetpp	56	547	640	<u>548</u>	<u>639</u>	549	638	56	514	681	<u>514</u>	<u>681</u>	515	680
473.astar	56	544	723	<u>545</u>	<u>722</u>	545	721	56	544	723	<u>545</u>	<u>722</u>	545	721
483.xalancbmk	56	275	1400	274	1410	<u>275</u>	<u>1410</u>	56	275	1400	274	1410	<u>275</u>	<u>1410</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS and OS configuration:
SCALING_GOVERNOR set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
C1E Support set to Disable
Sysinfo program /home/CPU2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Wed Feb 15 05:30:47 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 v4@ 2.40GHz
2 "physical id"s (chips)
56 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 1310

Inspur SA5112M4 (Intel Xeon E5-2680 v4)

SPECint_rate_base2006 = 1260

CPU2006 license: 3358

Test date: Feb-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

From /proc/meminfo

```
MemTotal:      263848548 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Feb 13 09:49

SPEC is set to: /home/CPU2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   393G   55G  339G  14% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.1.15 01/06/2017

Memory:

```
4x NO DIMM NO DIMM
16x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 1310

Inspur SA5112M4 (Intel Xeon E5-2680 v4)

SPECint_rate_base2006 = 1260

CPU2006 license: 3358

Test date: Feb-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 1310

Inspur SA5112M4 (Intel Xeon E5-2680 v4)

SPECint_rate_base2006 = 1260

CPU2006 license: 3358

Test date: Feb-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)

-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)

-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 1310

Inspur SA5112M4 (Intel Xeon E5-2680 v4)

SPECint_rate_base2006 = 1260

CPU2006 license: 3358

Test date: Feb-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
-qopt-ra-region-strategy=block
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint_rate2006 = 1310

Inspur SA5112M4 (Intel Xeon E5-2680 v4)

SPECint_rate_base2006 = 1260

CPU2006 license: 3358

Test date: Feb-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Sep-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 7 16:14:11 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2017.