



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

**SPECrate2017\_int\_base = 88.3**

**SPECrate2017\_int\_peak = 91.0**

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**Test Date:** Feb-2018

**Hardware Availability:** Sep-2017

**Software Availability:** Sep-2017

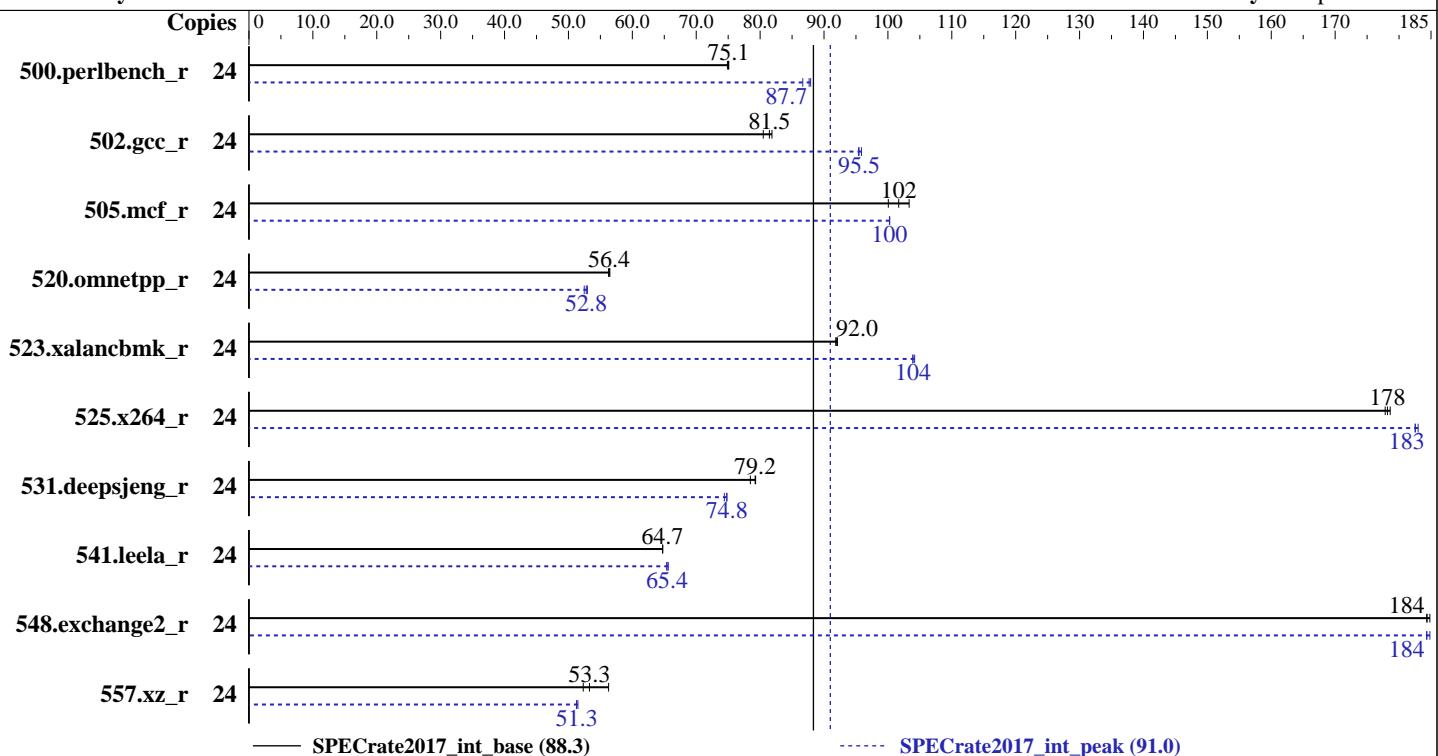

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon Silver 4116	OS:	SUSE Linux Enterprise Server 12 SP3 (x86_64)
Max MHz.:	3000		4.4.114-94.11-default
Nominal:	2100	Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Enabled:	24 cores, 2 chips		Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 1.3.7 released Feb-2018
L2:	1 MB I+D on chip per core	File System:	xfs
L3:	16.5 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)	Peak Pointers:	32/64-bit
Storage:	1 TB SATA 7200 RPM	Other:	jemalloc memory allocator library, version 5.0.1
Other:	None		



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

**SPECrate2017\_int\_base = 88.3**

**SPECrate2017\_int\_peak = 91.0**

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	24	<b>509</b>	<b>75.1</b>	510	74.9	509	75.1	24	435	87.9	441	86.7	<b>436</b>	<b>87.7</b>
502.gcc_r	24	415	81.9	<b>417</b>	<b>81.5</b>	422	80.5	24	354	95.9	356	95.4	<b>356</b>	<b>95.5</b>
505.mcf_r	24	375	103	<b>381</b>	<b>102</b>	388	100	24	387	100	387	100	<b>387</b>	<b>100</b>
520.omnetpp_r	24	557	56.5	<b>558</b>	<b>56.4</b>	559	56.3	24	594	53.0	600	52.5	<b>596</b>	<b>52.8</b>
523.xalancbmk_r	24	<b>276</b>	<b>92.0</b>	275	92.1	276	91.8	24	<b>244</b>	<b>104</b>	244	104	<b>243</b>	104
525.x264_r	24	<b>236</b>	<b>178</b>	235	179	236	178	24	<b>230</b>	<b>183</b>	230	183	<b>230</b>	183
531.deepsjeng_r	24	<b>347</b>	<b>79.2</b>	347	79.3	350	78.5	24	370	74.4	<b>368</b>	<b>74.8</b>	368	74.8
541.leela_r	24	614	64.8	614	64.7	<b>614</b>	<b>64.7</b>	24	608	65.4	<b>607</b>	<b>65.4</b>	606	65.6
548.exchange2_r	24	<b>341</b>	<b>184</b>	340	185	341	184	24	341	184	<b>341</b>	<b>184</b>	340	185
557.xz_r	24	461	56.3	<b>486</b>	<b>53.3</b>	495	52.3	24	<b>505</b>	<b>51.3</b>	506	51.3	<b>503</b>	51.5

**SPECrate2017\_int\_base = 88.3**

**SPECrate2017\_int\_peak = 91.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5; jemalloc: sources available via jemalloc.net

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1EE disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor disabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /root/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-jfqv Fri Feb 23 12:07:03 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
  2 "physical id"s (chips)
  24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings : 12
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

```
From lscpu:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 24
On-line CPU(s) list:   0-23
Thread(s) per core:    1
Core(s) per socket:    12
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz  
Stepping: 4  
CPU MHz: 2095.060  
BogoMIPS: 4190.12  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 16896K  
NUMA node0 CPU(s): 0,4,8,12,16,20  
NUMA node1 CPU(s): 1,5,9,13,17,21  
NUMA node2 CPU(s): 2,6,10,14,18,22  
NUMA node3 CPU(s): 3,7,11,15,19,23  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm intel\_pt rsb\_ctxsw spec\_ctrl retrpline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc pkru ospke

/proc/cpuinfo cache data  
cache size : 16896 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 4 8 12 16 20  
node 0 size: 46978 MB  
node 0 free: 46752 MB  
node 1 cpus: 1 5 9 13 17 21  
node 1 size: 48375 MB  
node 1 free: 48218 MB  
node 2 cpus: 2 6 10 14 18 22  
node 2 size: 48375 MB  
node 2 free: 48222 MB  
node 3 cpus: 3 7 11 15 19 23  
node 3 size: 48373 MB  
node 3 free: 48228 MB

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node distances:
node  0   1   2   3
 0: 10  21  11  21
 1: 21  10  21  11
 2: 11  21  10  21
 3: 21  11  21  10

From /proc/meminfo
MemTotal:      196713932 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-jfqv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 23 11:42

SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
 /dev/sda2      xfs   928G   25G  903G   3%  /


Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Dell Inc. 1.3.7 02/09/2018
Memory:
 12x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2400
 4x Not Specified Not Specified
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
    541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

-L/usr/local/je5.0.1-64/lib -ljemalloc



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/jet5.0.1-64/lib

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

-ljemalloc

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Silver 4116,  
2.10 GHz)

SPECrate2017\_int\_base = 88.3

SPECrate2017\_int\_peak = 91.0

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Other Flags (Continued)

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-02-23 13:07:02-0500.

Report generated on 2018-10-31 17:08:03 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-20.