



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175


Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

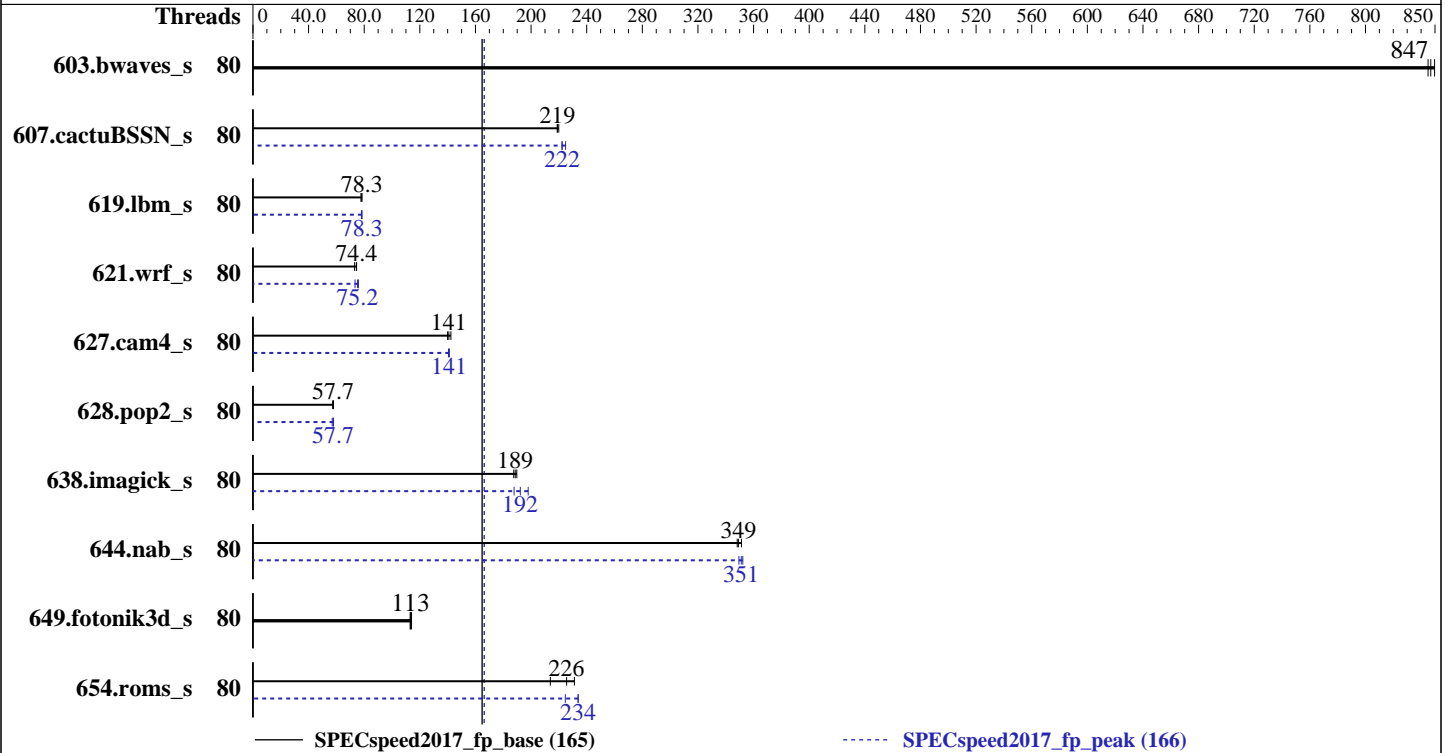

Hardware

CPU Name: Intel Xeon Gold 6148
 Max MHz.: 3700
 Nominal: 2400
 Enabled: 80 cores, 4 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-693.11.6.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 0.84 Released Mar-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	80	69.4	850	69.8	845	<u>69.7</u>	<u>847</u>	80	69.4	850	69.8	845	<u>69.7</u>	<u>847</u>
607.cactuBSSN_s	80	<u>76.1</u>	<u>219</u>	76.2	219	75.8	220	80	74.1	225	75.0	222	<u>75.0</u>	<u>222</u>
619.lbm_s	80	67.5	77.6	<u>66.9</u>	<u>78.3</u>	66.9	78.4	80	67.2	78.0	66.9	78.3	<u>66.9</u>	<u>78.3</u>
621.wrf_s	80	181	73.1	177	74.5	<u>178</u>	<u>74.4</u>	80	174	75.9	180	73.4	<u>176</u>	<u>75.2</u>
627.cam4_s	80	<u>62.9</u>	<u>141</u>	63.3	140	62.3	142	80	<u>62.8</u>	<u>141</u>	62.8	141	63.0	141
628.pop2_s	80	207	57.3	<u>206</u>	<u>57.7</u>	205	57.8	80	<u>206</u>	<u>57.7</u>	208	57.0	205	57.9
638.imagick_s	80	<u>76.5</u>	<u>189</u>	76.0	190	76.9	188	80	76.8	188	<u>75.0</u>	<u>192</u>	72.9	198
644.nab_s	80	<u>50.0</u>	<u>349</u>	49.7	351	50.2	348	80	49.6	352	50.0	349	<u>49.8</u>	<u>351</u>
649.fotonik3d_s	80	<u>80.4</u>	<u>113</u>	79.9	114	80.7	113	80	<u>80.4</u>	<u>113</u>	79.9	114	80.7	113
654.roms_s	80	<u>69.8</u>	<u>226</u>	73.6	214	68.1	231	80	70.1	225	<u>67.3</u>	<u>234</u>	67.3	234

SPECspeed2017_fp_base = 165

SPECspeed2017_fp_peak = 166

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/je5.0.1-32:/spec/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Power Efficiency Mode Set to Custom
Hyper-Threading Set to Disable

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Platform Notes (Continued)

ADDDC Sparing Set to Disabled
Sysinfo program /spec/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost.localdomain Thu May 24 14:24:09 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Thread(s) per core: 1
Core(s) per socket: 20
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
Stepping: 4
CPU MHz: 2401.000
BogoMIPS: 4807.55
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-19
NUMA node1 CPU(s): 20-39
NUMA node2 CPU(s): 40-59
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Platform Notes (Continued)

NUMA node3 CPU(s): 60-79

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
node 0 size: 391577 MB
node 0 free: 382430 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
node 1 size: 393216 MB
node 1 free: 384417 MB
node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59
node 2 size: 393216 MB
node 2 free: 384325 MB
node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 3 size: 393216 MB
node 3 free: 383982 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10
```

```
From /proc/meminfo
MemTotal: 1583347128 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Platform Notes (Continued)

```
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 24 09:17
```

```
SPEC is set to: /spec
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	600G	19G	582G	4%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS INSYDE Corp. 0.84 03/26/2018
```

```
Memory:
```

```
40x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666
8x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 619.lbm_s(peak)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
FC 607.cactuBSSN_s(base)  
-----
```

```
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Compiler Version Notes (Continued)

=====
FC 607.cactuBSSN_s(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

```
654.roms_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-qopenmp -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte
```



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 165

Huawei CH242 V5 (Intel Xeon Gold 6148)

SPECspeed2017_fp_peak = 166

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Peak Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-24 14:24:08-0400.

Report generated on 2018-10-31 17:53:03 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.