



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation


**SPECrate2017\_fp\_base = 152**

**SPECrate2017\_fp\_peak = 155**

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

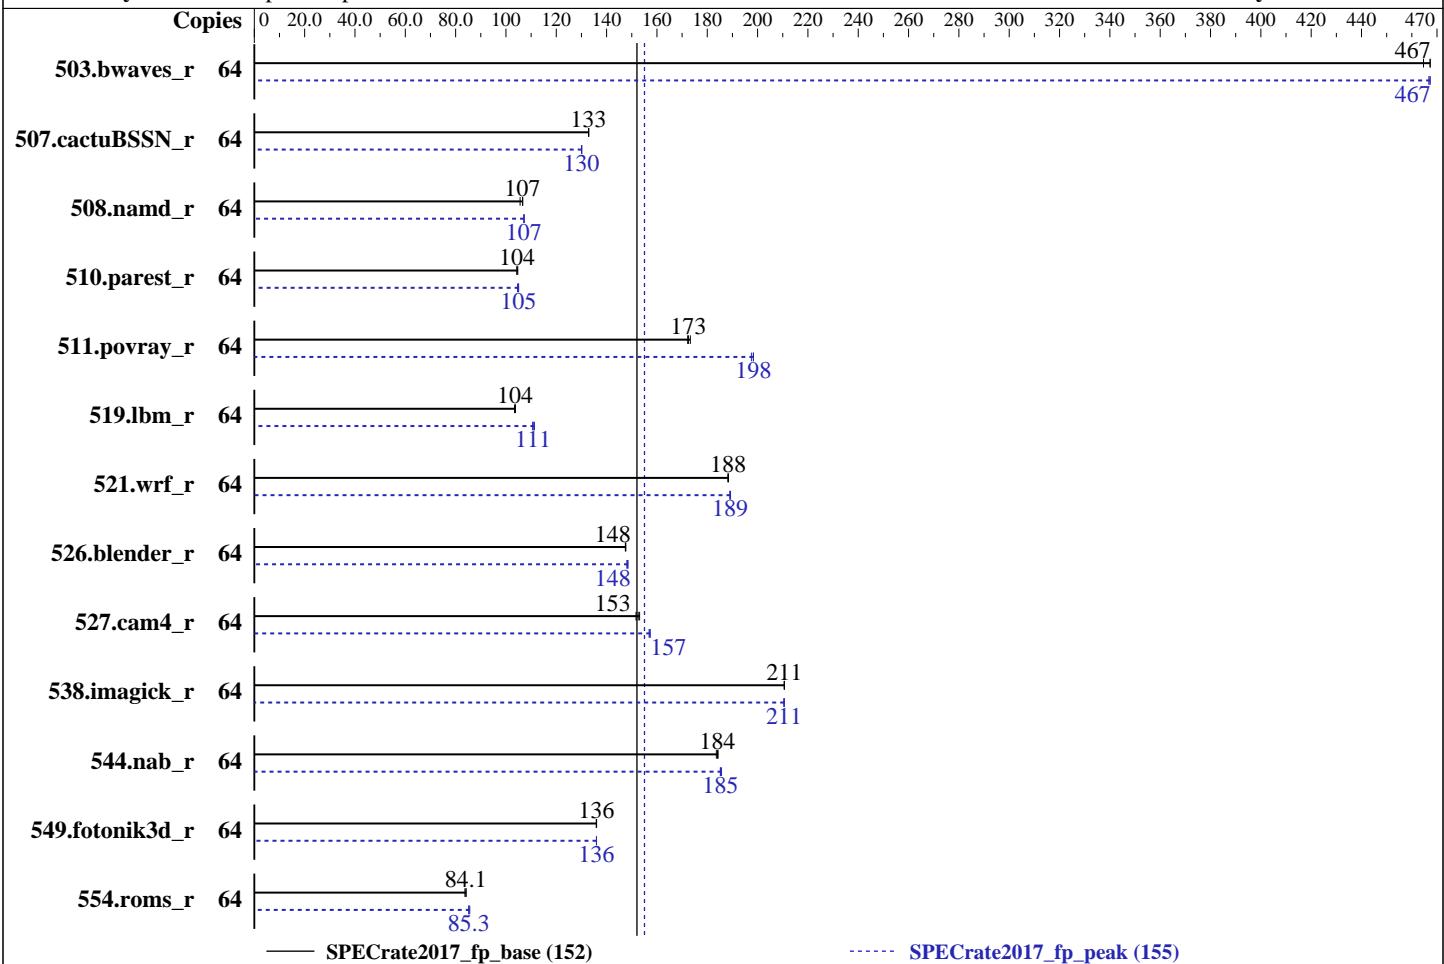

— SPECrate2017\_fp\_base (152)

---- SPECrate2017\_fp\_peak (155)

### Hardware

CPU Name: Intel Xeon Platinum 8153  
 Max MHz.: 2800  
 Nominal: 2000  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 200 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.17.9-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 4.0.4 released Jul-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

**SPECrate2017\_fp\_base = 152**

**SPECrate2017\_fp\_peak = 155**

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<b>1374</b>	<b>467</b>	1381	465	1373	467	64	1373	467	<b>1374</b>	<b>467</b>	1375	467
507.cactuBSSN_r	64	<b>610</b>	<b>133</b>	610	133	610	133	64	623	130	<b>623</b>	<b>130</b>	623	130
508.namd_r	64	<b>570</b>	<b>107</b>	576	106	570	107	64	<b>567</b>	<b>107</b>	567	107	567	107
510.parest_r	64	<b>1603</b>	<b>104</b>	1599	105	1605	104	64	<b>1596</b>	<b>105</b>	1601	105	1594	105
511.povray_r	64	862	173	<b>866</b>	<b>173</b>	868	172	64	757	198	<b>754</b>	<b>198</b>	754	198
519.lbm_r	64	652	103	<b>650</b>	<b>104</b>	650	104	64	<b>608</b>	<b>111</b>	610	111	606	111
521.wrf_r	64	762	188	<b>761</b>	<b>188</b>	761	188	64	759	189	<b>758</b>	<b>189</b>	758	189
526.blender_r	64	661	147	660	148	<b>661</b>	<b>148</b>	64	656	149	<b>657</b>	<b>148</b>	658	148
527.cam4_r	64	738	152	<b>734</b>	<b>153</b>	731	153	64	714	157	<b>712</b>	<b>157</b>	712	157
538.imagick_r	64	<b>756</b>	<b>211</b>	756	211	756	211	64	756	210	756	211	<b>756</b>	<b>211</b>
544.nab_r	64	<b>585</b>	<b>184</b>	584	184	587	184	64	<b>581</b>	<b>185</b>	582	185	580	186
549.fotonik3d_r	64	1835	136	<b>1834</b>	<b>136</b>	1834	136	64	1835	136	<b>1834</b>	<b>136</b>	1834	136
554.roms_r	64	1209	84.1	<b>1209</b>	<b>84.1</b>	1215	83.7	64	1194	85.2	<b>1193</b>	<b>85.3</b>	1188	85.6

**SPECrate2017\_fp\_base = 152**

**SPECrate2017\_fp\_peak = 155**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

The OS kernel (ver. 4.17.9) is a part of Inspur's performance boost suite which could be provided to customers who have special requirements. It's maintained and deployed by Inspur field engineer. Please see

<http://en.inspur.com/en/2402530/2402532/2402644/2402655/2402659/2404072/index.html> or inquire lcsd@inspur.com for further information.

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/CPU2017/lib/ia32:/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-32:/home/CPU2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS and OS configuration:

SCALING\_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

IMC (Integrated memory controller) Interleaving set to 1-way

Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-vzir Mon Oct 1 15:42:18 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

CPU2017 License: 3358

Test Date: Oct-2018

Test Sponsor: Inspur Corporation

Hardware Availability: Jul-2018

Tested by: Inspur Corporation

Software Availability: Jul-2018

## Platform Notes (Continued)

Thread(s) per core: 2  
Core(s) per socket: 16  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz  
Stepping: 4  
CPU MHz: 2299.899  
CPU max MHz: 2800.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4000.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 22528K  
NUMA node0 CPU(s): 0-3,8-11,32-35,40-43  
NUMA node1 CPU(s): 4-7,12-15,36-39,44-47  
NUMA node2 CPU(s): 16-19,24-27,48-51,56-59  
NUMA node3 CPU(s): 20-23,28-31,52-55,60-63  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mpf perf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single pt intel\_ppin mba tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke

/proc/cpuinfo cache data  
cache size : 22528 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43  
node 0 size: 192014 MB  
node 0 free: 181624 MB  
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47  
node 1 size: 193532 MB  
node 1 free: 186630 MB  
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Platform Notes (Continued)

```
node 2 size: 193532 MB
node 2 free: 186449 MB
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 193387 MB
node 3 free: 186421 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:      791006212 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-vzir 4.17.9-69-default #1 SMP Wed Jul 25 10:40:26 CST 2018 x86_64 x86_64
x86_64 GNU/Linux

run-level 3 Sep 30 14:35 last=5

SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   145G   60G   85G  42% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Inspur 4.0.4 07/19/2018

Memory:

24x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base)

=====

-----

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

-----

=====

CC 519.lbm\_r(peak) 544.nab\_r(peak)

=====

-----

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

-----

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

=====

-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

-----

=====

CXXC 508.namd\_r(peak) 510.parest\_r(peak)

=====

-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

-----

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Compiler Version Notes (Continued)

=====

CC 511.povray\_r(peak) 526.blender\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Compiler Version Notes (Continued)

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

fort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc fort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactusBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Base Portability Flags (Continued)

```
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Base Other Flags (Continued)

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5280M5 (Intel Xeon Platinum 8153)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate2017\_fp\_base = 152

SPECrate2017\_fp\_peak = 155

Test Date: Oct-2018

Hardware Availability: Jul-2018

Software Availability: Jul-2018

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-10-01 03:42:17-0400.

Report generated on 2018-11-27 13:28:19 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.