



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3


Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: Apr-2019

Tested by: HPE

Software Availability: Feb-2019

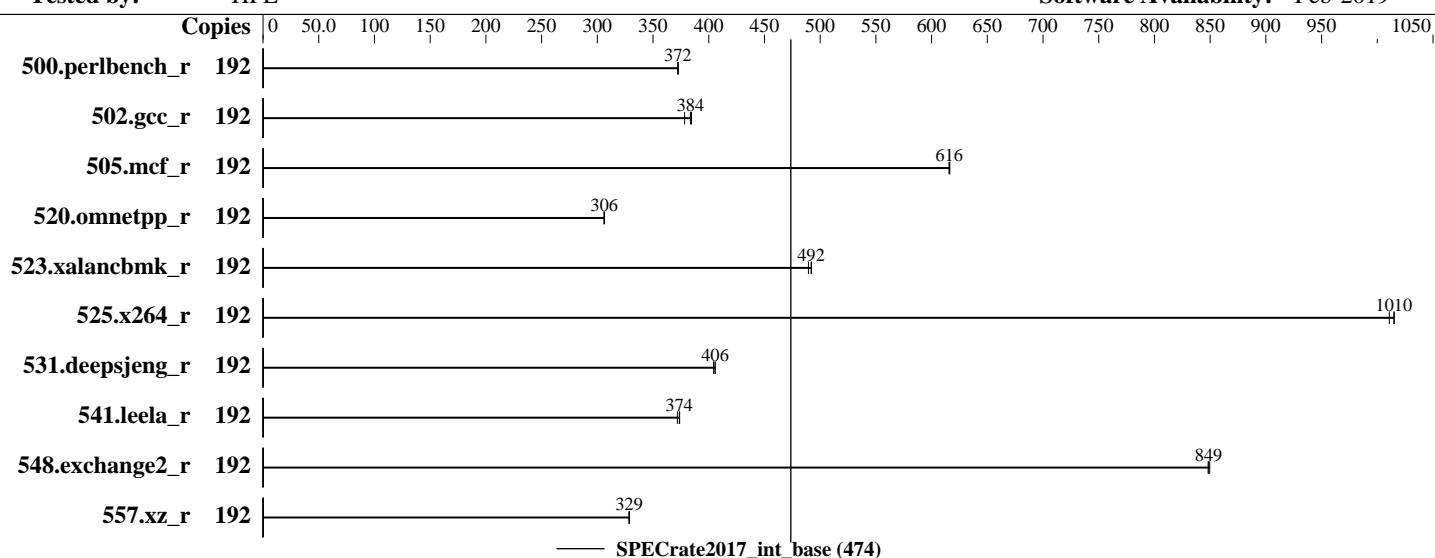

Hardware

CPU Name: Intel Xeon Gold 6262V
 Max MHz.: 3600
 Nominal: 1900
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 1, 2, 3, 4 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R,
 running at 2400)
 Storage: 1 x 400 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64)
 Kernel 4.12.14-23-default
 Compiler: C/C++: Version 19.0.2.187 of Intel C/C++
 Compiler Build 20190117 for Linux;
 Fortran: Version 19.0.2.187 of Intel Fortran
 Compiler Build 20190117 for Linux
 Parallel: No
 Firmware: HPE BIOS Version U34 05/21/2019 released Apr-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: Apr-2019

Tested by: HPE

Software Availability: Feb-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	821	372	821	372	820	373									
502.gcc_r	192	707	385	709	384	719	378									
505.mcf_r	192	504	616	504	616	503	616									
520.omnetpp_r	192	822	306	823	306	823	306									
523.xalancbmk_r	192	412	492	412	492	414	489									
525.x264_r	192	331	1010	333	1010	331	1020									
531.deepsjeng_r	192	542	406	544	404	542	406									
541.leela_r	192	855	372	850	374	851	374									
548.exchange2_r	192	592	850	593	849	593	848									
557.xz_r	192	631	329	631	329	631	328									

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017_u2/lib/ia32:/home/cpu2017_u2/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Workload Profile set to General Throughput Compute

Workload Profile set to Custom

Energy/Performance Bias set to Balanced Performance

Advanced Memory Protection set to Advanced ECC

Sysinfo program /home/cpu2017_u2/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on dl580-sles15 Fri Jul 12 14:11:38 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

On-line CPU(s) list: 0-191

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 4

NUMA node(s): 8

Vendor ID: GenuineIntel

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```

CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6262V CPU @ 1.90GHz
Stepping: 7
CPU MHz: 1900.000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-11,96-107
NUMA node1 CPU(s): 12-23,108-119
NUMA node2 CPU(s): 24-35,120-131
NUMA node3 CPU(s): 36-47,132-143
NUMA node4 CPU(s): 48-59,144-155
NUMA node5 CPU(s): 60-71,156-167
NUMA node6 CPU(s): 72-83,168-179
NUMA node7 CPU(s): 84-95,180-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbe fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_13 cdp_13 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 96 97 98 99 100 101 102 103 104 105 106 107
node 0 size: 96349 MB
node 0 free: 95928 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 108 109 110 111 112 113 114 115 116
117 118 119
node 1 size: 96763 MB
node 1 free: 96549 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 120 121 122 123 124 125 126 127 128
129 130 131
node 2 size: 96734 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: Apr-2019

Tested by: HPE

Software Availability: Feb-2019

Platform Notes (Continued)

```
node 2 free: 96605 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 132 133 134 135 136 137 138 139 140
141 142 143
node 3 size: 96763 MB
node 3 free: 96512 MB
node 4 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 144 145 146 147 148 149 150 151 152
153 154 155
node 4 size: 96763 MB
node 4 free: 96630 MB
node 5 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 156 157 158 159 160 161 162 163 164
165 166 167
node 5 size: 96763 MB
node 5 free: 96622 MB
node 6 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 168 169 170 171 172 173 174 175 176
177 178 179
node 6 size: 96763 MB
node 6 free: 96638 MB
node 7 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 180 181 182 183 184 185 186 187 188
189 190 191
node 7 size: 96761 MB
node 7 free: 96622 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  21  31  31  31  31  31  31
  1: 21  10  31  31  31  31  31  31
  2: 31  31  10  21  31  31  31  31
  3: 31  31  21  10  31  31  31  31
  4: 31  31  31  31  10  21  31  31
  5: 31  31  31  31  21  10  31  31
  6: 31  31  31  31  31  31  10  21
  7: 31  31  31  31  31  31  21  10
```

From /proc/meminfo

```
MemTotal:      792230120 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```
uname -a:  
Linux dl580-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,  
IBPB, IBRS_FW
```

run-level 3 Jul 12 14:10

```
SPEC is set to: /home/cpu2017_u2  
Filesystem      Type   Size  Used Avail Use% Mounted on  
/dev/sda2        btrfs  371G  57G  314G  16% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 05/21/2019

Memory:

24x UNKNOWN NOT AVAILABLE

24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)  
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

FC 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-fopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(1.90 GHz, Intel Xeon Gold 6262V)

SPECrate2017_int_base = 474

SPECrate2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

C benchmarks (continued):

-lqkmalloc

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-12 04:41:37-0400.

Report generated on 2019-08-06 17:59:00 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-06.