



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

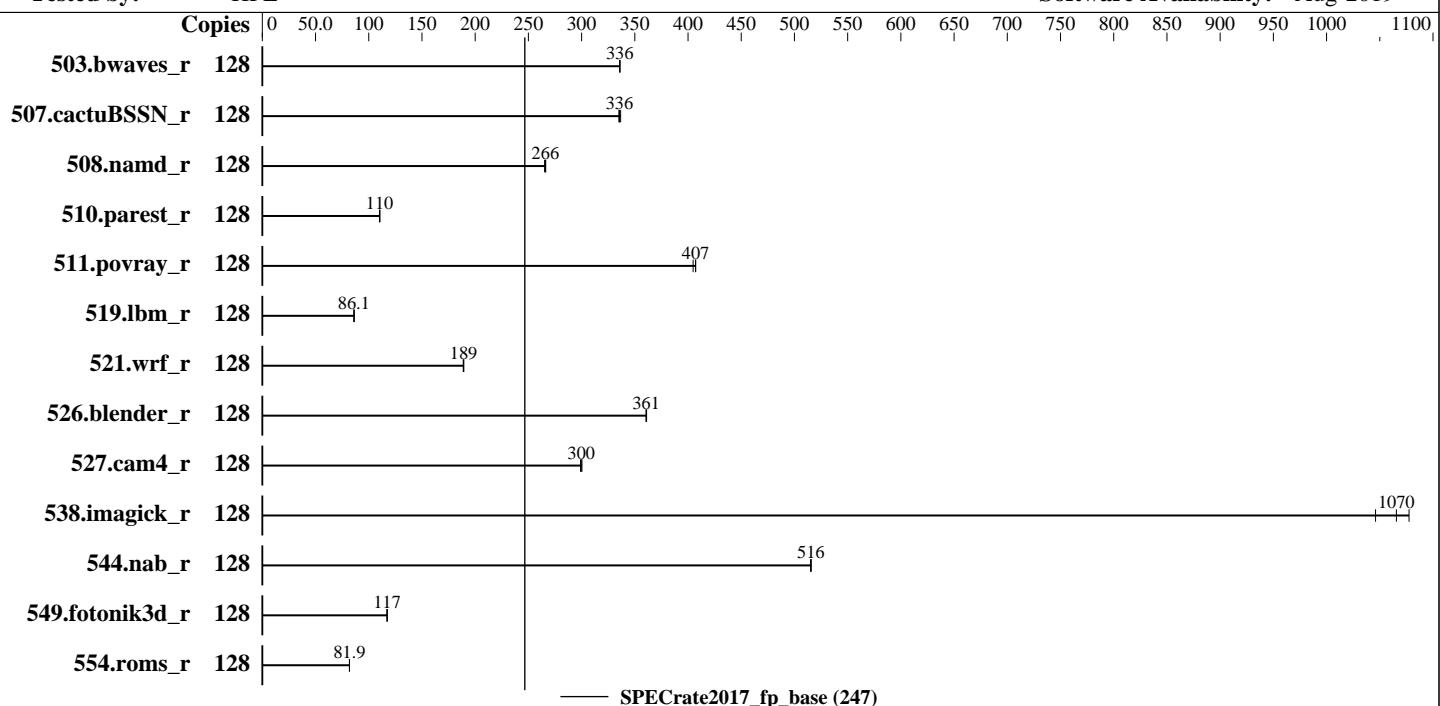

Hardware

CPU Name: AMD EPYC 7702P
 Max MHz.: 3350
 Nominal: 2000
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2933Y-L)
 Storage: 1 x 400 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version A41 07/15/2019 released Aug-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V5.2.0;



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	3821	336	3822	336	3820	336							
507.cactuBSSN_r	128	484	335	481	337	483	336							
508.namd_r	128	457	266	458	265	457	266							
510.parest_r	128	3030	111	3042	110	3038	110							
511.povray_r	128	734	407	734	407	738	405							
519.lbm_r	128	1567	86.1	1564	86.3	1566	86.1							
521.wrf_r	128	1519	189	1516	189	1515	189							
526.blender_r	128	540	361	540	361	541	361							
527.cam4_r	128	747	300	749	299	745	300							
538.imagick_r	128	299	1070	304	1050	295	1080							
544.nab_r	128	418	515	418	516	418	516							
549.fotonik3d_r	128	4253	117	4256	117	4253	117							
554.roms_r	128	2485	81.9	2484	81.9	2483	81.9							

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
 Set swappiness=1 to swap only if necessary
 Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017_A2/amd_rate_aocc200_rome_A_lib/64;

/home/cpu2017_A2/amd_rate_aocc200_rome_A_lib/32:"

MALLOC_CONF = "retain:true"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC 9.1.0 in Ubuntu 19.04

with flags: -Ofast -march=znver2. jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Minimum Processor Idle Power Core C-State set to C6 State

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

NUMA memory domains per socket set to Four memory domains per socket

Sysinfo program /home/cpu2017_A2/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-stzp Sat Jul 20 06:37:36 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7702P 64-Core Processor

1 "physical id"s (chips)

128 "processors"

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: Aug-2019

Tested by: HPE

Software Availability: Aug-2019

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        48 bits physical, 48 bits virtual
CPU(s):               128
On-line CPU(s) list: 0-127
Thread(s) per core:  2
Core(s) per socket:  64
Socket(s):            1
NUMA node(s):         4
Vendor ID:            AuthenticAMD
CPU family:           23
Model:                49
Model name:           AMD EPYC 7702P 64-Core Processor
Stepping:              0
CPU MHz:              2000.000
CPU max MHz:          2000.0000
CPU min MHz:          1500.0000
BogoMIPS:              3992.32
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-15,64-79
NUMA node1 CPU(s):    16-31,80-95
NUMA node2 CPU(s):    32-47,96-111
NUMA node3 CPU(s):    48-63,112-127
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                      constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmpfperf pnpi
                      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
                      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
                      cat_13 cdp_13 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bni2
                      cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
                      cq_m_llc cq_m_occup_llc cq_m_mb_m_total cq_m_mb_m_local clzero irperf xsaveerptr arat npt
                      lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
76 77 78 79
node 0 size: 128798 MB
node 0 free: 128447 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95
node 1 size: 129016 MB
node 1 free: 128663 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
103 104 105 106 107 108 109 110 111
node 2 size: 129016 MB
node 2 free: 128691 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
118 119 120 121 122 123 124 125 126 127
node 3 size: 128973 MB
node 3 free: 128660 MB
node distances:
node 0 1 2 3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10
```

From /proc/meminfo

```
MemTotal:      528185420 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

uname -a:

```
Linux linux-stzp 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 3 Jul 20 01:15

SPEC is set to: /home/cpu2017_A2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc2	btrfs	445G	42G	403G	10%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A41 07/15/2019

Memory:

```
8x HPE P03054-091 64 GB 4 rank 2933
8x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
```

```
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
```

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

```
=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
```

```
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
```

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====

FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====

CC 511.povray_r(base) 521.wrf_r(base) 526.blender_r(base) 527.cam4_r(base)

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

=====

FC 507.cactuBSSN_r(base)

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

526.blender_r: -funsigned-char -D_BOOL_DEFINED -DSPEC_LP64

527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.00 GHz, AMD EPYC 7702P)

SPECrate2017_fp_base = 247

SPECrate2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-fvl-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs  
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-fvl-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-lmvec -lamdlibm -ljemalloc -lflang
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-20 06:37:35-0400.

Report generated on 2019-08-07 19:27:29 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-07.